



DEDICATION TO THE TRADES

Since the company began in 1924, Milwaukee Tool has led the industry in both durability and performance. With an unwavering commitment to the trades, MILWAUKEE® continues to lead with a focus on providing innovative, cordless, trade-specific solutions. MILWAUKEE® is dedicated to delivering a steady stream of advanced solutions for the trades that offer increased productivity and unmatched durability.

GAME-CHANGING SOLUTIONS

At MILWAUKEE® the phrase "good enough" doesn't exist in our vocabulary. Our goal is to solve problems in ways that have never been done before. The result: tools and equipment that offer unmatched levels of performance, productivity and durability.











BUILT ON THE BEST FOUNDATION



REDLITHIUM™

They last longer, think faster and work harder than all other professional LITHIUM-ION batteries. Built to withstand even the harshest environments, REDLITHIUM™ Batteries deliver more work over the life of the battery, no matter what the job.



MILWAUKEE® HIGH PERFORMANCE

Highly advanced motor technology boosts efficiency, generating more power from a compact power source. That means the ultimate performance, durability and run-time comes in a smaller, lighter package.



REDLINK[™] INTELLIGENCE

An advanced combination of hardware and software, REDLINK™ Intelligence enables full-circle communication between our batteries and tools, allowing for unmatched levels of performance, protection and productivity.

TRADE-FOCUSED SOLUTIONS

USER-DRIVEN INNOVATIONS

Instead of making assumptions about what users need, we set out to deliver disruptive innovation by getting out on the jobsite, alongside trade professionals, to understand their challenges – the frustrations, needs, and previous limitations. We set out to completely rethink a solution with new-to-world technology and unparalleled levels of design and engineering. Whether it's bringing cordless power to traditionally corded or gas products and manual activities, or advances to fundamental tools and equipment, we are dedicated to improving workplace productivity and safety.



M18™ FORCE LOGIC™ Press Tool w/ ONE-KEY™

THE SMALLEST. MOST **INTELLIGENT PRESS TOOL**

The M18™ FORCE LOGIC™ Press Tool w/ ONE-KEY™ is the industry's smallest, most intelligent press tool. With an in-line design and brushless motor, it achieves more run-time per charge and faster cycle times while being significantly smaller and nearly 20% lighter than the leading competitor. The M18™ FORCE LOGIC™ Press Tool w/ ONE-KEY™ and compatible jaws are designed to work with over 20 unique fitting systems offering 1/2" to 4" capacity. With the addition of ONE-KEY™ compatibility, the press tool automatically logs and wirelessly uploads connection data from every press made with the tool which can be passed onto key stakeholders through customizable reports.



M12 FUEL™ 3/8" Digital Torque Wrench w/ ONE-KEY™

50% FASTER ACCURACY UP TO +/- 2%

FASTER, MORE **PRODUCTIVE**

The M12 FUEL™ Digital Torque Wrench w/ ONE-KEY™ is the industry's first torque wrench with a motor, delivering increased productivity, precise torque accuracy, and user demanded reporting functionality. The torque wrench delivers up to 50% faster installation time, replacing the hand tool or two tool installation process and providing accuracy within 2% for torque critical fasteners. This battery powered torque wrench is equipped with MILWAUKEE® ONE-KEY™, giving you the power to record all the fasteners and produce a downloadable report via ONE-KEY™.




M18 FUEL™ 8-1/4" Table Saw w/ ONE-KEY™

GENERATES 15A

24½" RIP CAPACITY

600 LFT PER CHARGE

The world's first 18V table saw, the M18 FUEL™ 8-1/4" Table Saw w/ ONE-KEY™ generates the power of a 15 amp corded saw. With a rip capacity up to 24-1/2" and a vertical capacity up to 2-1/2" to tackle 2x dimensional lumber, this saw boasts the impressive capacity that users have come to expect on a traditional corded table saw. Equipped with ONE-KEY™, users can also easily track, manage, and secure the table saw through the ONE-KEY™ app on their phone.



THE EASIEST **WAY TO PUNCH**

The MILWAUKEE® Knockout System makes every step in the hole making process both faster and easier. The EXACT™ Punches and Dies are set up separate from the tool for extreme ease of use, utilizing a quick-connect alignment system that allows users to snap the tool onto the punches and dies without fighting against its weight and pull the trigger to punch the hole with ease.



M18 FUEL™ 1" D-Handle High Torque Impact Wrench w/ ONE-KEY™

2,000 FT-LBS TORQUE

PER CHARGE HOSES

ELIMINATES

Our M18 FUEL™ 1" D-Handle High Torque Impact Wrench w/ ONE-KEY™ is the world's first cordless 1" D-Handle High Torque Impact Wrench. The POWERSTATE™ Brushless Motor delivers up to 2,000 ft-lbs of nut-busting torque and 1,900 ft-lbs of fastening torque, making this the world's most powerful cordless impact wrench, enabling you to complete the most demanding applications. With the run-time to install up to 200 1-1/4" bolts on a single HIGH OUTPUT™ HD12.0 Battery, this portable impact wrench provides unmatched performance. The battery-powered impact wrench provides you with cordless convenience and eliminates the need for compressors, generators, cords and hoses. With no compressor or hose, you have greater productivity and portability to complete applications not accessible with a pneumatic unit.



MX FUEL™ 14" Cut-Off Saw

INSTANT START, ZERO EMISSIONS

FASTEST

The MX FUEL™ 14" Cut-Off Saw delivers instant starts and zero emissions while providing you with no gas headaches, fastest cuts from start to finish, and can cut 6 ft of concrete or 72 cuts in #5 rebar per charge. By providing a 5" cut depth and eliminating the hassle of pull starts, the MX FUEL™ 14" Cut-Off Saw helps you maximize your productivity in every application. The MX FUEL™ REDLITHIUM™ Battery Pack provides instant power with less noise and vibration, and zero emissions for a safer workspace indoors or outdoors.

M18 FUEL™ Pipe Threader w/ ONE-KEY™

AUTOSTOP™ SIDE-GRIP CONTROL

THREAD STARTS FASTER THAN CORDED

The M18 FUEL™ Pipe Threader w/ ONE-KEY™ revolutionizes pipe threading. Featuring AUTOSTOP™ kickback control, the tool protects against severe kickback. This, combined with the integrated side-grip for easier thread starts, delivers unrivaled tool control. The world's first cordless pipe threader threads faster than corded alternatives and delivers unmatched productivity.





6FT IN CONCRE

72 CUTS IN REBAR

M18™ FORCE LOGIC™ 10.000 PSI Hydraulic Pump

THE EASIEST WAY **TO POWER HYDRAULICS**

The M18™ FORCE LOGIC™ 10,000 PSI Hydraulic Pump is designed to be fully compatible with all existing 10,000 PSI rated hydraulic hoses and heads. Delivering the easiest set-up, at up to 80% smaller and up to 75 lbs lighter than gas units, the pump can easily be carried by a single person. Delivering 3X the flow rate of competitive cordless pumps; 24-second cycle times and up to 60 presses on a single battery on 1590 ACSR connectors, the pump provides gas-like performance.

THE WORLD LEADER IN CORDLESS INNOVATION

Milwaukee Tool is committed to driving unrivaled performance and productivity for the professional trades through our groundbreaking developments in cordless technology.


Our leadership in cordless innovation has helped to shape the industry. We were the first to introduce LITHIUM-ION technology to power tools, and have achieved significant leaps forward in advanced motors, the most intelligent

REDLITHIUM BATTERIES

electronics, and connected tools.

This leadership allows us to continue providing a steady stream of solutions that exceed the demands of the trades.



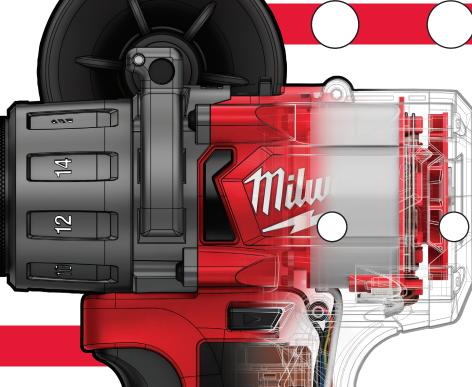

POWERSTATE BRUSHLESS MOTORS

HIGH PERFORMANCE

MILWAUKEE's high performance POWERSTATE™ Brushless Motors contain top-grade rare earth magnets and greater copper content, delivering more power and torque for superior application performance.

PURPOSE BUILT

Each motor is uniquely engineered for the demands of the tool.

Motor-optimization ensures the perfect combination of performance, portability and productivity.





LIGHT APPLICATIONS

LONGER MORE MORE RUN-TIME



HEAVY APPLICATIONS

REDLINK" INTELLIGENCE

DURABILITY

Best-in-class thermal and overload monitoring protects tools in extreme jobsite conditions.

PRODUCTIVITY

Advanced communication features, such as DRIVE CONTROL™, allow users to quickly move from light to heavy applications with the touch of a button.

ONETKEY

Get more out of your tools and equipment than ever before with integrated tool tracking, security and customization. ONE-KEY™ combines smarter tools with the industry's only free-to-use inventory management program.



FULL SYSTEM COMPATIBILITY With industry-leading intelligence connecting every battery, tool and charger. MILWAUKEE's M18™ System has upheld full forward and backward compatibility for over a decade. 2007 2020 200+ TOOLS 2 TOOLS

UNMATCHED OPTIMIZED PROTECTION PERFORMANCE PRODUCTIVITY

CELL TECHNOLOGY

Not all batteries are created equal. In our world-class battery lab, battery cells are engineered to deliver the highest performing packs on the jobsite.

PACK CONSTRUCTION

Unique patented designs protect every REDLITHIUM™ Battery, safeguarding your investment through drops, weather exposure, and harsh environments.

ROBUST ELECTRONICS

Innovative communication systems monitor cells, providing temperature and overload protection, while optimizing performance for every tool and battery combination.



RUN-TIME BATTERY LIFE





THE WORLD LEADER IN CORDLESS INNOVATION





PORTABLE PRODUCTIVITY.

TRADE FOCUSED. SYSTEM WIDE.

Pages 9 - 34



PERFORMANCE DRIVEN.

TRADE FOCUSED. SYSTEM WIDE.


Pages 35 - 78



EQUIPMENT REDEFINED.

TRADE FOCUSED. SYSTEM WIDE.

Pages 79 - 88

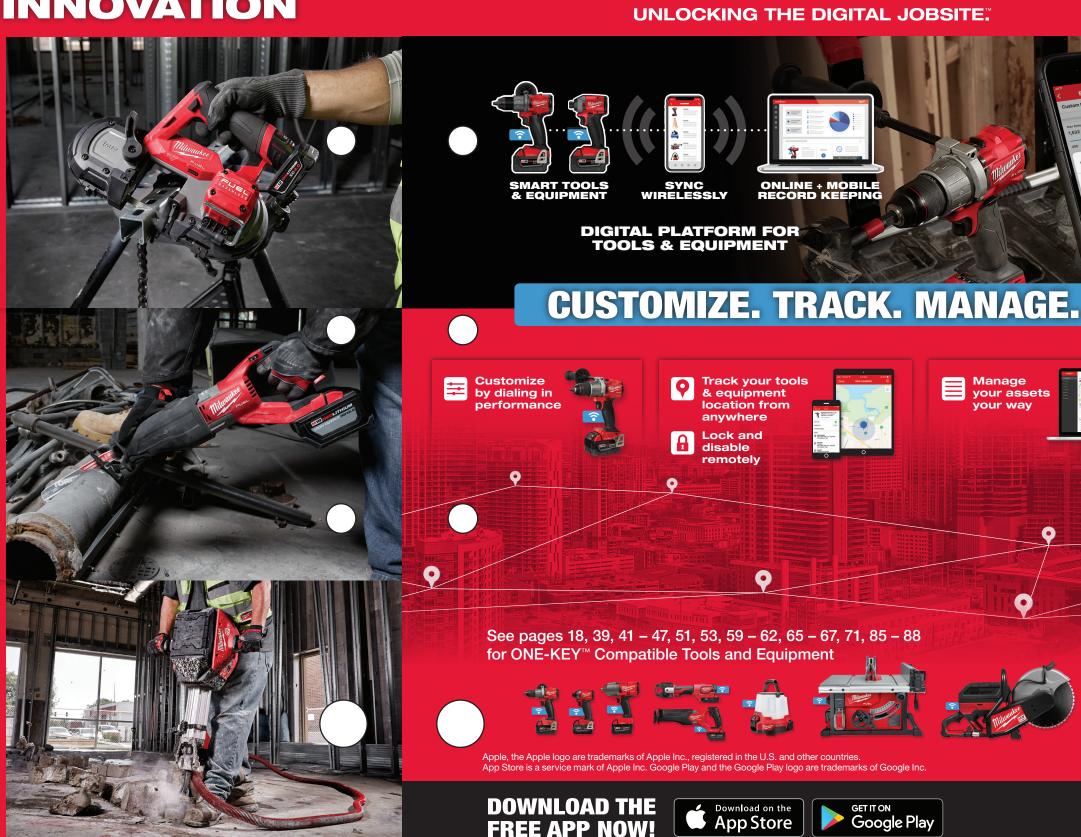













PORTABLE PRODUCTIVITY TRADE FOCUSED SYSTEM WIDE





ALL M12 TOOLS FIT M12 BATTERIES

100+ TOOLS



DRIVEN TO OUTPERFORM.

M12 FUEL™ is engineered for the most demanding tradesmen in the world.

M12 FUEL™ delivers unrivaled performance in a compact structure and features three MILWAUKEE® exclusive innovations – the POWERSTATE™ Brushless Motor, REDLITHIUM™ Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software – that deliver unmatched power, run-time and durability.

Simply put, M12 FUEL™ is best-in-class, full-circle technology that drives, protects and powers your cordless tools beyond the rest.



LONGER MORE MORE POWER RUN-TIME



POWERSTATE™ BRUSHLESS MOTOR

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors
- Up to 10X Longer Motor Life





PREDLINK PLUS™INTELLIGENCE

- Most Advanced Electronic System on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life
- Built-In Fuel Gauge Displays Remaining Charge



REDLITHIUM CP2.0 & XC4.0 BATTERY PACKS

- Up to 2X More Run-Time
- Up to 20% More Power
- Over 2X More Recharges than Leading Competitors
- Operates Below -18°C / 0°F







M12 FUEL

1/2" Hammer Drill/Driver Kit

2504-22 (2504-20 Tool-Only)

Specifications:

| 350 in-lbs |
|--|
| 0 – 1,700 |
| 0 – 25,500 |
| 1/2" Metal Single Sleeve – Ratcheting Chuck |
| 6.6" / 2.3 lbs |
| |

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack. (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case

M12™ 3/8" Hammer **Drill/Driver Kit**

2408-22 (2408-20 Tool-Only)

Specifications:

| Peak Torque | 275 in-lbs |
|-----------------|--------------------------|
| RPM | 0 - 400 / 0 - 1,500 |
| BPM | 0 – 22,500 |
| Chuck Type | 3/8" Metal Single Sleeve |
| Length / Weight | 7.5" / 2.7 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs. Belt Clip, Charger, Carrying Case



M12 FUEL 1/2" Drill/Driver Kit

2503-22 (2503-20 Tool-Only)

Specifications:

| Peak Torque | 350 in-lbs |
|-----------------|--|
| RPM | 0 – 1,700 |
| Chuck Type | 1/2" Metal Single Sleeve – Ratcheting Chuck |
| Length / Weight | 6.6" / 2.3 lbs |
| | |

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case

M12 FLEL Installation **Drill/Driver Kit**

2505-22 (2505-20 Tool-Only)

Specifications:

| Opcomoduo. | | |
|-----------------|---|----------|
| Max Torque | 300 in-lbs | |
| RPM (2-Mode) | 0 - 400 / 0 - 1,600 | |
| Attachments | 3/8" Metal Chuck, 1/4" Hex, Offset and Rig | ht Angle |
| Lenath / Weiaht | 5.1" / 2.0 lbs | |

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, (4) Attachments (3/8" Metal Chuck, 1/4" Hex, Offset and Right Angle), Belt Clip, Charger, Compartmentalized Contractor Bag

M12™ 3/8" **Drill/Driver Kit**

2407-22 (2407-20 Tool-Only)

| Specifications: | | |
|-----------------|--------------------------|--|
| Peak Torque | 275 in-lbs | |
| RPM | 0 - 400 / 0 - 1,500 | |
| Chuck Type | 3/8" Metal Single Sleeve | |
| Lenath / Weight | 7.4" / 2.5 lbs | |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 3/8" Right **Angle Drill/Driver Kit**

2415-21 (2415-20 Tool-Only)

Specifications:

| - | |
|-----------------|-----------------------------|
| Peak Torque | 100 in-lbs |
| RPM | 0 – 800 |
| Clutch Settings | 11 Settings plus Drill Mode |
| Chuck Type | 3/8" Single Sleeve |
| Head Profile | 3.8" |
| Weight | 2.4 lbs |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Soft Carrying Case

1/4" Hex 2-Speed Screwdriver Kit

2402-22 (2402-20 Tool-Only)

Specifications:

| Peak Torque | 325 in-lbs |
|-----------------|-----------------------|
| RPM | 0 - 450 / 0 - 1,700 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 6.6" / 2.0 lbs |
| | |

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex 2-Speed **Screwdriver Kit**

2406-22 (2406-20 Tool-Only)

Specifications:

| Peak Torque | 275 in-lbs |
|-----------------|-----------------------|
| RPM | 0 - 400 / 0 - 1,500 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 6.8" / 1.8 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex **Screwdriver Kit**

2401-22 (2401-20 Tool-Only)

Specifications:

| Peak Torque | 175 in-lbs |
|-----------------|-----------------------|
| RPM | 0 – 500 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 6.5" / 2.0 lbs |
| | |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Soft Carrying Case

M12 FUEL 1/4" Hex Impact Driver Kit

2553-22 (2553-20 Tool-Only)

Specifications:

| Fastening Torque | 1,300 in-lbs |
|------------------|-----------------------|
| IPM | 0 – 4,000 |
| RPM | 0 – 3,300 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 5.1" / 1.8 lbs |
| | |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



SURGE™ 1/4" Hex Hydraulic Driver Kit

2551-22 (2551-20 Tool-Only)

Specifications:

| Sustained Fastening Torque | 450 ft-lbs |
|-------------------------------|-----------------------|
| IPM | 0 – 3,400 |
| RPM | 0 – 3,200 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 5.2" / 2.4 lbs |

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Contractor Bag

M12™ 1/4" Hex Impact **Driver Kit**

2462-22 (2462-20 Tool-Only)

Specifications:

| Fastening Torque | 1,000 in-lbs |
|------------------|----------------|
| IPM | 0 – 3,300 |
| RPM | 0 – 2,500 |
| Chuck Type | 1/4" Hex |
| Length / Weight | 6.5" / 2.3 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex Right Angle **Impact Driver Kit**

2467-21 (2467-20 Tool-Only)

Specifications:

| Fastening Torque | 600 in-lbs |
|------------------|------------|
| IPM | 0 – 3,300 |
| RPM | 0 - 2,450 |
| Chuck Type | 1/4" Hex |
| Head Profile | 1.4" |
| Weight | 2.6 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Soft Carrying Case

1/2" Stubby Impact Wrench Kit

2555-22, 2555P-22 (2555-20 Tool-Only)

Specifications:

| Peak Torque | 250 ft-lbs |
|-----------------|--------------------|
| IPM | 0 – 3,200 |
| RPM | 0 – 2,700 |
| Anvil Type | 1/2" Friction Ring |
| Length / Weight | 4.9" / 2.1 lbs |

Includes: 2555-22 1/2" Stubby Impact Wrench; 2555P-22 1/2" Stubby Impact Wrench w/ Pin Detent; **All Kits Include:** (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



3/8" Stubby Impact Wrench Kit

2554-22 (2554-20 Tool-Only) Specifications:

| Opoomoution. | - |
|-----------------|--------------------|
| Peak Torque | 250 ft-lbs |
| IPM | 0 - 3,200 |
| RPM | 0 – 2,700 |
| Anvil Type | 3/8" Friction Ring |
| Length / Weight | 4.8" / 2.1 lbs |

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



1/4" Stubby Impact Wrench Kit

2552-22 (2552-20 Tool-Only)

Specifications:

| Length / Weight | 5.1" / 1.8 lbs |
|-----------------|-------------------|
| Anvil Type | 1/4" Friction Rin |
| RPM | 0 - 3,200 |
| IPM | 0 - 4,300 |
| Peak Torque | IUU TT-IDS |

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case

3/8" Impact Wrench Kit

2454-22 (2454-20 Tool-Only)

Specifications:

| Peak Torque | 117 ft-lbs |
|-----------------|-----------------------|
| IPM | 0 – 3,500 |
| RPM (2-Mode) | 0 - 1,200 / 0 - 2,650 |
| Anvil Type | 3/8" Friction Ring |
| Length / Weight | 6.5" / 2.4 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 3/8" Impact Wrench Kit

2463-22 (2463-20 Tool-Only)

Specifications:

| 1 car rorque | 100 11 103 |
|-----------------|--------------------|
| IPM | 0 – 3,300 |
| RPM | 0 – 2,500 |
| Anvil Type | 3/8" Friction Ring |
| Length / Weight | 6.5" / 2.3 lbs |
| | |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Impact Wrench Kit

2461-22 (2461-20 Tool-Only)

Specifications:

| Peak Torque | 38 ft-lbs |
|-----------------|--------------------|
| IPM | 0 – 3,800 |
| RPM | 0 – 2,500 |
| Anvil Type | 1/4" Friction Ring |
| Length / Weight | 6.0" / 2.1 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case







RPM

RPM

Rotary Hammer and Rotation Only

TABLE

TABLE 1

HEPA

FILTER

M12™ 1/2" SDS Plus Rotary Hammer Kit

lothing but **HEAVY DUTY**.º

M12 FLEL

1/2" Right Angle Impact Wrench w/ Friction Ring Kit

2565-22 (2565-20 Tool-Only)

Specifications:

| Peak Torque | 220 ft-lbs |
|-----------------|-----------------------|
| IPM / RPM | 0 - 3,600 / 0 - 3,000 |
| Head Profile | 2.2" |
| Length / Weight | 14.2" / 3.3 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs,

Related Accessory: 49-16-2564 M12 FUEL™ Right Angle Impact Wrench Rubber Boot



1/2" Right Angle Impact Wrench w/ Pin Detent Kit

2565P-22 (2565P-20 Tool-Only)

Specifications:

| Peak Torque | 220 ft-lbs |
|-----------------|-----------------------|
| IPM / RPM | 0 - 3,600 / 0 - 3,000 |
| Head Profile | 2.2" |
| Length / Weight | 14.2" / 3.3 lbs |

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs,

Related Accessory:

49-16-2564 M12 FUEL™ Right Angle Impact Wrench Rubber Boot



M12 FLEL

3/8" Right Angle Impact Wrench w/ Friction Ring Kit

2564-22 (2564-20 Tool-Only)

Specifications:

| Peak Torque | 220 ft-lbs |
|-----------------|-----------------------|
| IPM / RPM | 0 - 3,600 / 0 - 3,000 |
| Head Profile | 2.2" |
| Length / Weight | 14.2" / 3.2 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger, Carrying Case
Related Accessory:

49-16-2564 M12 FUEL™ Right Angle Impact Wrench Rubber Boot

M12 FUEL 1/2" Ratchet Kit

2558-22 (2558-20 Tool-Only)

Specifications:

| Fastening Torque | 60 ft-lbs |
|------------------|------------------|
| RPM | 0 – 175 |
| Anvil Type | 1/2" Ball Detent |
| Head Profile | 1.1" |
| Length / Weight | 12.5" / 3.1 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger, Carrying Case

Related Accessory:

M12 FUEL

3/8" Ratchet Kit

2557-22 (2557-20 Tool-Only)

Specifications:

| Fastening Torque | 55 ft-lbs |
|------------------|------------------|
| RPM | 0 – 200 |
| Anvil Type | 3/8" Ball Detent |
| Head Profile | 1.1" |
| Length / Weight | 11.8" / 2.8 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs,

Related Accessory:

49-16-2557 M12 FUEL™ 3/8" Ratchet Rubber Boot



3/8" Extended Reach Ratchet Kit

2560-21 (2560-20 Tool-Only)

Specifications:

| Fastening Torque | 55 ft-lbs |
|------------------|------------------|
| RPM | 0 – 200 |
| Anvil Type | 3/8" Ball Detent |
| Head Profile | 1.1" |
| Length / Weight | 15.1" / 3.1 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack,

Related Accessory:

49-16-2560 M12 FUEL™ 3/8" Extended Reach Ratchet Rubber Boot

1/4" Extended Reach Ratchet Kit

2559-21 (2559-20 Tool-Only)

Specifications:

| Fastening Torque | 40 ft-lbs |
|------------------|------------------|
| RPM | 0 – 250 |
| Anvil Type | 1/4" Ball Detent |
| Head Profile | 0.76" |
| Length / Weight | 14.4" / 2.3 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack,

Related Accessory: 49-16-2559 M12 FUEL™ 1/4" Extended Reach Ratchet Rubber Boot

3/8" High Speed Ratchet Kit

2567-22 (2567-20 Tool-Only)

Specifications:

| Fastening Torque | 35 ft-lbs |
|------------------|------------------|
| RPM | 0 – 450 |
| Anvil Type | 3/8" Ball Detent |
| Head Profile | 0.75" |
| Length / Weight | 11.1" / 2.1 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs,

Related Accessories:

49-16-2567 M12 FUEL™ High Speed Ratchet Rubber Boot; 49-09-2567 3/8" High Speed Ratchet Tall Shift Knob Assembly





1/4" High Speed Ratchet Kit

2566-22 (2566-20 Tool-Only)

Specifications:

| Fastening Torque | 35 ft-lbs |
|------------------|------------------|
| RPM | 0 – 450 |
| Anvil Type | 1/4" Ball Detent |
| Head Profile | 0.75" |
| Length / Weight | 11.1" / 2.1 lbs |

Includes: (2) M12™ REDLITHIUM™ CP2.0

ttery Packs, Charger, Carrying Case **Related Accessories:**

49-16-2567 M12 FUEL" High Speed Ratchet Rubber Boot; 49-09-2566 1/4" High Speed Ratchet Tall Shift Knob Assembly

M12™ 3/8" Ratchet Kit

2457-21 (2457-20 Tool-Only)

Specifications:

| Fastening Torque | 35 ft-lbs |
|------------------|------------------|
| RPM | 0 – 250 |
| Anvil Type | 3/8" Ball Detent |
| Head Profile | 0.8" |
| Lenath / Weiaht | 10.8" / 1.9 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 3/8" - 1/4" Adapter, Charger, Soft Carrying Case



M12™ 1/4" Ratchet Kit

M12™ Rivet Tool Kit

2550-22 (2550-20 Tool-Only)

Specifications:

Pull Force

Rivet Sizes

Stroke Length

Rivet Material

Length / Weight

Charger, Contractor Bag

M12 FUEL

2456-21 (2456-20 Tool-Only)

Specifications:

| Fastening Torque | 30 ft-lbs |
|------------------|------------------|
| RPM | 0 – 250 |
| Anvil Type | 1/4" Ball Detent |
| Head Profile | 0.8" |
| Lenath / Weight | 10.8" / 1.9 lbs |

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Charger, Soft Carrying Case

2,000 lbs

/ 4.5 lbs

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs,

(4) Nose Pieces (3/32", 1/8", 5/32", 3/16"), Belt Hook,

3/32" - 3/16"

Stainless Steel

Aluminum, Steel and

6.5" (without mandrel collector)





M12" HAMMERVAC" **Universal Dust**

| 2306-22 (2306-20 1001- |
|------------------------|
| Specifications: |
| Universal |



Weight Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery



Includes: (2) M12™ REDLITHIUM™ XC3.0 Battery Packs,

0 - 800

0 - 5,350

9.0" / 3.9 lbs

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor Kit

M12™ HAMMERVAC™ **Universal Dust Extractor**

2412-22XC (2412-20 Tool-Only)

Specifications:

2-Mode Operation

Length / Weight

2509-22 (2509-20 Tool-Only)





AUTOPULSE™ Filter Cleaning Mechanism achieves Table 1 OSHA

Compliance Self-Powered by No Cords or Hoses for M12™ REDLITHÍUM™ Maximum Portability Battery Pack

3-Mode Switch Yes (Auto-On and Auto-Off w/ Delay) 1-1/4" Max Diameter Max Depth

Includes: Small Diameter Nozzle, Large Diameter Nozzle; 2509-22 (2) M12™ REDLITHIUM™ CP2.0 Batteries, Charger, Contractor Bag Related Accessories:

49-90-2302 M12™ HAMMERVAC™ Universal Dust Extractor Nozzle; 49-90-2343 M12™ HAMMERVAC™ Universal Dust Extractor Dust Box, Filter; 49-90-2016 3 pk Fleece Dust Bags



2306-22 (2306-20 Tool-Only)



OSHA

HEPA

No Cords or Hoses for M12™ REDLITHÍUM™ Maximum Portability Battery Pack 3-Mode Switch Yes (Auto-On and Auto-Off w/ Delay)

Max Bit Size 5/8" 3.3 lbs

Packs, (3) Side Handle Collars, Side Handle Grip, Nozzle, Charger, Carrying Case



2-Mode Operation Rotary Hammer and Rotation Only Length / Weight 10.0" / 3.9 lbs **Includes:** (2) M12[™] REDLITHIUM[™] XC4.0 Battery Packs,

5/8" SDS Plus Rotary Hammer Kit

Related Accessory: Universal Dust Extractor Kit



M12™ Palm Nailer Kit

2458-21 (2458-20 Tool-Only)

Specifications:

| Impact Energy | 2.2 ft-lbs (3.0 J) |
|-----------------|--------------------|
| BPM | 0 – 2,700 |
| Collet Capacity | 6D – 16D |
| Head Profile | 3/4" |
| Magnetic Tip | Yes |
| Weight | 3.4 lbs |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Hand Strap, Charger, Soft Carrying Case



M12™ 23 Gauge Pin Nailer 2540-21 (2540-20 Tool-Only)

Specifications:

| Opcomoditions: | |
|------------------|----------------|
| Nail Diameter | 23 Gauge |
| Nail Size | 1/2" - 1-3/8" |
| Magazine Size | 120 Nails |
| Magazine Loading | Side Load |
| Firing Modes | Sequential |
| Length / Weight | 8.7" / 3.8 lbs |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Reversible Belt Clip, Jam Clearing Guide, Hex Wrench, Secondary Tip, Charger, Contractor Bag



M12™ 3/8" Crown Stapler Kit

2447-21 (2447-20 Tool-Only)

Specifications:

| Opoomoutione: | |
|-------------------|-----------------|
| Staple Crown Size | 3/8" Flat Crown |
| Staple Length | 1/4" - 9/16" |
| Staple Type | T-50 |
| Length / Weight | 7.3" / 3.0 lbs |





1/4" Right Angle Die Grinder Kit

2485-22 (2485-20 Tool-Only)

Specifications:

| Power Output | 0.3 HP |
|-----------------|-------------|
| DDM | 0 04 500 |
| RPM | 0 – 24,500 |
| Collet Size | 1/4" |
| Accessory Size | 2" |
| Height / Length | 8.7" / 4.5" |
| Weight | 1.7 lbs |
| | |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs,

Related Accessories:

49-16-2485 M12 FUEL" 1/4" Right Angle Die Grinder Rubber Boot; 48-07-2486 1/4" Cut-Off Wheel Arbor; 48-66-2486 1/8" Collet & Nut Kit; 49-94-2000 2" Metal Cut-Off Wheel



1/4" Straight Die Grinder Kit


2486-22 (2486-20 Tool-Only)

Specifications:

| Power Output | 0.3 HP |
|-----------------|------------|
| RPM | 0 - 21,000 |
| Collet Size | 1/4" |
| Accessory Size | 2" |
| Height / Length | 2" / 11" |
| Weight | 1.6 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs,

Related Accessories: 48-07-2486 1/4" Cut-Off Wheel Arbor; 48-66-2486 1/8" Collet & Nut Kit;





2466-22 (2466-20 Tool-Only)

Specifications:

| • | |
|------------------|--|
| Torque Range | 12.5 - 150 ft-lbs |
| RPM | 0 – 100 |
| Tool Accuracy | CW: +/-2% of Full Scale / CCW: +/-3% of Full Scale (Range: 20% – 100% of Full Scale) |
| Ratcheting Angle | 4.5° |
| Anvil Size | 1/2" Ball Detent |
| Measuring Units | ft-lbs, in-lbs, Nm, kg-cm |
| Length / Weight | 23.5" / 5.7 lbs |
| | |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Certificate of Calibration, Charger, Carrying Case




M12 FLEL 3/8" Digital Torque Wrench w/ ONE-KEY™ Kit

2465-22 (2465-20 Tool-Only)

Specifications:

| Torque Range | 10 - 100 ft-lbs |
|------------------|--|
| RPM | 0 – 100 |
| Tool Accuracy | CW: +/-2% of Full Scale / CCW: +/-3% of Full Scale (Range: 20% – 100% of Full Scale) |
| Ratcheting Angle | 4.5° |
| Anvil Size | 3/8" Ball Detent |
| Measuring Units | ft-lbs, in-lbs, Nm, kg-cm |
| Lenath / Weiaht | 23.3" / 5.5 lbs |

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs. Certificate of Calibration, Charger, Carrying Case



M12™ Spot Polisher Kit

2438-22X, 2438-22 (2438-20 Tool-Only)

Specifications:

| Polishing RPM | 0 – 2,800 |
|-----------------|----------------|
| Sanding RPM | 0 – 8,300 |
| Length / Weight | 5.1" / 2.4 lbs |

Includes: 2438-22X (1) M12™ REDLITHIUM™ XC3.0 Battery Pack, (1) M12™ REDLITHIUM™ CP1.5 Battery Pack; **2438-22** (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs; All Kits Include: 5 Pc Accessory Pack, Side Handle, Charger, Soft Carrying Case



M12 FUEL 5-3/8" Circular Saw Kit

2530-21XC (2530-20 Tool-Only)

Specifications:

| RPM | 3,600 |
|----------------|------------------------------|
| Bevel Capacity | 50° |
| Cut Capacity | 1-5/8" at 90°; 1-1/8" at 45° |
| Arbor | 10 mm |
| Blade Guards | Aluminum |
| Weight | 6.2 lbs |
| | |

Includes: (1) M12 $^{\rm m}$ REDLITHIUM $^{\rm m}$ XC4.0 Battery Pack, Circular Saw Blade, Wrench, Charger, Contractor Bag

HACKZALL® One-Handed **Reciprocating Saw Kit**

2520-21XC (2520-20 Tool-Only)

Specifications:

| SPM | 0 – 3,000 |
|------------------------|--|
| Stroke Length | 5/8" |
| Keyless Blade Clamp | QUIK-LOK™ (Accepts all SAWZALL® Blades) |
| Length / Weight | 13.3" / 4.1 lbs |

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, HACKZALL® Blade, Charger, Contractor Bag

M12™ HACKZALL® One-Handed **Reciprocating Saw Kit**

2420-22, 2420-21 (2420-20 Tool-Only)

Specifications:

| SPM | 0 – 3,000 |
|------------------------|--|
| Stroke Length | 1/2" |
| Keyless Blade Clamp | QUIK-LOK [™] (Accepts all SAWZALL® Blades) |
| Length / Weight | 11.0" / 2.6 lbs |

Includes: 2420-22 (2) M12™ REDLITHIUM™ CP1.5 Battery Packs; 2420-21 (1) M12™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: (2) HACKZALL® Blades, Charger, Contractor Bag

M12™ High Performance Jig Saw Kit

2445-21 (2445-20 Tool-Only) **Specifications:**

| | _ |
|-----------------|-------------------------------------|
| SPM | 0 – 2,800 |
| Stroke Length | 3/4" |
| Bevel Capacity | 45° (Positive Locks at 90° and 45°) |
| Blade Clamp | QUIK-LOK™ T-Shank |
| Length / Weight | 8.8" / 4.2 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 10 TPI Wood Cutting T-Shank Jig Saw Blade, Anti-Splintering Insert, Non-Marring Shoe, Charger, Contractor Bag



M12™ Grease Gun Kit

Up to 7 Grease

16 oz Bulk,

16 oz Suction

Cartridges Per Charge

Includes: (1) M12[™] REDLITHIUM[™] XC3.0 Battery Pack,

36" Flex Hose with Spring Guard, Grease Coupler, Charger, Carrying Case

2446-21XC (2446-20 Tool-Only)

Output Pressure Over 8,000 PSI

Grease Capacity 14 oz Cartridge,

Specifications:

Run-Time

Weight



Oscillating Multi-Tool Kit

2526-21XC (2526-20 Tool-Only)

| Specifications: 🔪 🧸 | | |
|----------------------------|-----------------|--|
| Speed Settings | 12 | |
| OPM | 10,000 - 20,000 | |
| Oscillation Angle | 3.9° | |
| Tool-Free Accessory Change | Yes | |
| LED Light | Yes | |
| Length / Weight | 13" / 3.2 lbs | |

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack. (5) Sanding Sheets, (1) Sanding Pad, (1) Wood Cutting Blade, Charger, Contractor Bag

M12™ Multi-Tool Kit

2426-22, 2426-21 (2426-20 Tool-Only) Specifications:

| I I a la casa a | | |
|-----------------|----------|--|
| OPM | | |
| Speed S | Settings | |
| • | | |

5,000 - 20,000 Yes Accessory Adapter Length / Weight 10.9" / 2.1 lbs

Includes: 2426-22 (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs; 2426-21 (1) M12™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: Accessory Adapter, Wood Cutting Blade, Sanding Pad, (5) Assorted Sanding Sheets, Charger, Contractor Bag

HATCHET™ 6" Pruning Saw Kit

2527-21 (2527-20 Tool-Only)

Specifications:

| Bar Length | 6" |
|-----------------|------------------|
| Chain Gauge | .043" |
| Chain Pitch | 3/8" Low Profile |
| Chain Speed | 5 m/s |
| Oiler | Automatic |
| Trigger | Variable Speed |
| Length / Weight | 18.3" / 4.8 lbs |

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, 6" Oregon® Bar & Chain, Scrench, Scabbard, Charger **Related Accessories: 49-16-2732** 6" Saw Chai **49-16-2733** 6" Guide Ba



Compact Band Saw Kit

2529-21XC (2529-20 Tool-Only)

Specifications:

| SFPM | 0 – 570 |
|---------------------------------|-----------------|
| Blade Size | 30-9/16" |
| Cut Capacity | 2-1/2" x 2-1/2" |
| LED Light | Yes |
| Hang Hook | Yes |
| Reamer Attachment Compatibility | Yes |
| | |

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, 12/14 TPI Compact Extreme Thin Metal Band Saw Blade, Charger, Contractor Bag Related Accessories:

49-90-2029 Compact Band Saw Reamer Attachment; **48-39-0630** 30-9/16" 8/10 TPI

Compact Extreme Thick Metal Band Saw Blade 3 pk; 48-39-0631 30-9/16" 12/14 TPI Compact Extreme Thick Metal Band Saw Blade 3 pk; 48-39-0635 30-9/16" 8/10 TPI Compact Extreme Thick Metal Band Saw Blade 25 pk;

48-39-0636 30-9/16" 12/14 TPI Compact Extreme Thick Metal Band Saw Blade 25 pk; 48-39-0637 30-9/16" 8/10 TPI

mpact Extreme Thick Metal Band Saw Blade 100 bulk; 48-39-0639 30-9/16" 12/14 TPL Compact Extreme Thick Metal Band Saw Blade 100 bulk



M12™ Sub-Compact **Band Saw Kit**

2429-21XC (2429-20 Tool-Only)

Specifications:

| SFPM | 280 |
|-----------------|-----------------|
| Blade Size | 27" |
| Cut Capacity | 1-5/8" x 1-5/8" |
| Length / Weight | 11.0" / 6.7 lbs |

Meets OSHA Guarding Requirements. Suitable for One-Handed Use.

Includes: (1) M12[™] REDLITHIUM[™] XC3.0 Battery Pack, 18 TPI Sub-Compact Portable Band Saw Blade, Charger, Carrying Case **Related Accessories:**

48-39-0572 18 TPI Sub-Compact Portable Band Saw Blades (3 pk); 48-39-0711 12/14 TPI Extreme Metal Sub-Compact Portable Band Saw Blades (3 pk)

3" Compact Cut-Off Tool Kit

2522-21XC (2522-20 Tool-Only)

| Specifications: | |
|-----------------|----------------|
| Blade Size | 3" |
| RPM | 20,000 |
| Arbor Size | 3/8" |
| Cut Depth | 0.64" |
| Blade Rotation | Reversible |
| Length / Weight | 8.9" / 2.4 lbs |





Specifications:

| Speed Settings | 6 |
|-----------------|-----------------|
| RPM | 5,000 - 32,000 |
| Collet | 1/8", Universal |
| Length / Weight | 9.5" / 1.3 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, (5) Cutting Wheels, Mandrel, Wrench, Charger, Soft Carrying Case **Related Accessory:**

M12™ 10 oz Caulk & **Adhesive Gun Kit**

2441-21 (2441-20 Tool-Only)

Specifications:

2442-21

Force

Weight

2444-21

Force

Specifications:

Auto-Reverse Anti-Drip

and Piston Assembly, Nozzle, Charger

M12™ Quart Caulk &

Adhesive Gun Kit

Specifications:

Auto-Reverse Anti-Drip

Inches Per Minute

Speed Settings

Inches Per Minute

Speed Settings

| opoomounomo. | |
|------------------------|---------|
| Force | 400 lbs |
| Inches Per Minute | 0 – 29 |
| Speed Settings | 6 |
| Auto-Reverse Anti-Drip | Yes |
| Weight | 4.1 lbs |
| | |

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, 10 oz Carriage, M12™ 10 oz Plunger Rod and Piston Assembly, Charger

Style Caulk & Adhesive Gun Kit

400 lbs

0 - 29

4.9 lbs

20 oz Aluminum Sausage Style Barrel, M12™ 20 oz Plunger Rod

400 lbs

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Quart Carriage,

48-08-0900 M12™ 10 oz Caulk and Adhesive Gun Conversion Kit; 48-08-0905 M12™ 20 oz Aluminum Barrel Sausage Style

48-08-0910 M12™ Quart Caulk and Adhesive Gun Conversion Kit;

0 - 29

Yes 5.5 lbs

M12™ Quart Plunger Rod and Piston Assembly, Charger

Caulk Gun Accessories

Compatible with 2441-21, 2442-21, 2444-21

31-12-0700 Caulk Gun Nozzle - Black;

Caulk and Adhesive Gun Conversion Kit;

48-08-1091 20 oz Aluminum Barrel Kit; 48-08-1096 20 oz Clear Barrel Kit

Yes

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack,

2460-21 (2460-20 Tool-Only)

| 6 |
|-----------------|
| 5,000 - 32,000 |
| 1/8", Universal |
| 9.5" / 1.3 lbs |
| |

M12™ Soldering Iron Kit

7.2 lbs

2488-21 (2488-20 Tool-Only)

Air Bleeder Valve Yes

Specifications:

| Max Temperature | 750°F |
|----------------------|------------------|
| Heat Output | 90 Watts |
| Heat-Up Time | 18 Seconds |
| Heat Indicator | Yes |
| Interchangeable Tips | Chisel and Point |
| Length / Weight | 11.6" / 0.9 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Chisel Tip, Pointed Tip, Charger, Carrying Case

M12™ 20 oz Aluminum Barrel Sausage M12[™] Cable Stripper Kit

2435CU-21S, 2435AL-21, 2435X-21 (2435-20 Tool-Only)

Specifications:

| Variable Speed Trigger | Yes |
|-----------------------------|-----------------------------------|
| Tool Free Depth Gauge | Yes |
| Compatible Bushing Types | Industry Standard Quick-Change |
| Dimensions (L x W x H) | 8.6" x 2.8" x 11.5" |
| Weight | 3.6 lbs |
| | |

Includes: 2435CU-21S 1/0 AWG - 750 MCM Cu THHN / XHHW Bushings; **2435AL-21** 1/0 AWG - 750 MCM AI THHN / XHHW Bushings; 2435X-21 1/0 AWG - 500 MCM Cu RHW / RHH / USE Bushings; All Kits Include: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Reference Available Bushings on Pg. 64



M12™600 MCM Cable Cutter Kit

2472-21XC (2472-20 Tool-Only)

Specifications:

| opcomoations: | |
|-----------------|---|
| Cut Capacity | 600 MCM Copper, 750 MCM Aluminum, 1-3/16" Communication Cable |
| Jaw Opening | 1-7/16" |
| Two-Speed | Yes |
| Length / Weight | 10.5" / 6.7 lbs |
| | |

Includes: (1) M12™ REDLITHIUM™ XC3.0 Battery Pack, Multi-Voltage Charger, Carrying Case Related Accessory: 48-44-0410 M12™ 600 MCM Cable Cutter Blade



M12™ Plastic Pipe **Shear Kit**

2470-21 (2470-20 Tool-Only)

Specifications:

| Cut Capacity | 80 PVC |
|-----------------|---------------------------------|
| Torque | 1,900 in-lbs |
| Blade | 3 mm Reinforced Stainless Steel |
| Length / Weight | 14.4" / 4.4 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack,

Related Accessory: 48-44-0405 M12™ Plastic Pipe Shear Blade

M12™ Copper Tubing Cutter Kit

2471-22, 2471-21 (2471-20 Tool-Only)

Specifications:

| Cut Capacity | 3/8" - 1" (1/2" - 1-1/8" O.D.) | |
|-----------------|--------------------------------|--|
| Tubing Type | M, L and K Copper | |
| RPM | 500 | |
| Length / Weight | 14.0" / 3.2 lbs | |
| | | |

Includes: 2471-22 (2) M12™ REDLITHIUM™ CP1.5 Battery Packs; 2471-21 (1) M12™ REDLITHIUM™ CP1.5 Battery Pack;

All Kits Include: Charger, Carrying Case Related Accessory:



M12™ Drain Snake Kit 2571-21 (2571-20 Tool-Only)

Specifications:

| Specifications |): |
|----------------------------|--|
| Max Drain Line Capacity | 1-1/4" – 2-1/2", Up to 25' |
| Drum Capacity | 1/4" x 25', Best for 1-1/4" – 2" drain lines; 5/16" x 25', Best for 1-1/4" – 2-1/2" drain lines |
| Variable Speed Spin | 0 – 500 RPM |
| LED Light | Yes |
| Weight (without cable) | 6.5 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 5/16" x 25' Inner Core Bulb Head Cable with Inner Drum. Charger, 5 Gallon Storage Bucket

Related Accessories:

48-53-2561 5/16" x 25' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating;

48-53-2562 5/16" x 25' Inner Core Drop Head Cable w/ RUST GUARD™ Plating;

48-53-2563 1/4" x 25' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating;

48-53-2564 1/4" x 25' Inner Core Drop Head Cable w/ RUST GUARD™ Plating

M12™ TRAPSNAKE™ 6¹ Toilet Auger Kit

2576-21 (2576-20 Tool-Only)

Specifications:

| RPM | 0 – 500 |
|--------------------|----------------|
| Cable Lock | Yes |
| Cable Size | 6' x 1/2" |
| Cable Head | Retriever Bulb |
| Replacement Cables | Available |
| Weight | 9.0 lbs |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Cable, Charger **Related Accessories:**

48-53-2576 TRAPSNAKE[™] 6' Toilet Auger Replacement Cable; 48-22-2576 TRAPSNAKE™ Toilet Auger Case; 2575-21 M12™ TRAPSNAKE™ Driver Upgrade Kit



M12™ TRAPSNAKE™ 4' Urinal Auger Kit

2574-21 (2574-20 Tool-Only)

Specifications:

| RPM | 0 – 500 |
|--------------------|-----------|
| Cable Lock | Yes |
| Cable Size | 4' x 3/8" |
| Cable Head | Bulb |
| Replacement Cables | Available |
| Weight | 6.4 lbs |
| | |

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Cable, Charger Related Accessories:

48-53-2577 TRAPSNAKE™ 4' Urinal Auger Replacement Cable; 48-22-2577 TRAPSNAKE™ Urinal Auger Case; 2575-21 M12™ TRAPSNAKE™ Driver Upgrade Kit



M12™ AIRSNAKE™ **Drain Cleaning Air Gun Kit**

2572B-21, (2572B-20 Tool-Only)

| Specifications: | 411 411 | Milwaukee |
|-------------------------------|-----------------------|-----------|
| Max Drain Line Capacity | 1" – 4", Up to 35' | BAIRSNAKE |
| Automatic Pressure Loading | Yes | AIMSNARE |
| Variable Pressure | 0 - 50 PSI | |
| Variable Pressure Dial | Yes | |
| LED Light | Yes | |
| Length / Weight | 20.8" / 7.1 lbs | |

Includes: 2572B-21 (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Charger

All Kits Include: 2572B-20: 1" - 2" Drain Plug, 2" – 3" Drain Plug, 3" – 4" Drain Plug, Drain Shroud Attachment, Toilet Seal Attachment, 10" Extension, (3) Straight Connectors, 15° Offset Connector, Carrying Case



M12™ ProPEX® Expansion Tool Kit

2432-22 (2432-20 Tool-Only)

Specifications:

| Capacity | 3/8" - 1" |
|------------------------|-------------------------|
| Auto-Rotate | Built-In |
| Head Compatibility | 3/8" - 1" M12™ / Uponor |
| Dimensions (L x W x H) | 7.1" x 3.7" x 12.8" |
| Weight | 5.0 lbs |
| | |

Includes: (3) ProPEX® Expansion Heads (1/2", 3/4", 1"), ProPEX® Tool Cone Grease, Carrying Case; 2432-22 (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Charger

Related Accessories:

49-08-2400 ProPEX® Expander Cone Grease; 49-16-2403 3/8" ProPEX® Expansion Head; 49-16-2404 1/2" ProPEX® Expansion Head;

49-16-2405 5/8" ProPEX® Expansion Head;

49-16-2406 3/4" ProPEX® Expansion Head; 49-16-2408 1" ProPEX® Expansion Head



Includes: (3) ProPEX® Expander Heads w/ RAPID SEAL™ (1/2", 3/4", 1"), ProPEX® Expander Cone Grease, Carrying Case: **2532-22** (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger

4.5 lbs

Related Accessories:

M12 FUEL

Weight

49-16-2414 1/2" ProPEX® Expander Head w/ RAPID SEAL™; 49-16-2415 5/8" ProPEX® Expander Head w/ RAPID SEAL™; 49-16-2416 3/4" ProPEX® Expander Head w/ RAPID SEAL™;



M12™ PEX Expansion Tool Kit 2474-22

Specifications:

| Capacity | 3/8" - 1" |
|------------------------|---------------------|
| Auto-Rotate | Built-In |
| Head Compatibility | 3/8" - 1" M12™ |
| Dimensions (L x W x H) | 7.1" x 3.7" x 12.8" |
| Weight | 5.0 lbs |

Includes: (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, (3) PEX Expansion Heads (1/2", 3/4", 1"), PEX Tool Cone Grease, Charger, Carrying Case

Related Accessories:

49-16-2424 1/2" PEX Expander Head;

49-16-2426 3/4" PEX Expander Head;

49-16-2428 1" PEX Expander Head;

49-08-2402 PEX Tool Grease



M12™ FORCE LOGIC™ **Press Tool Kit**

2473-22 (2473-20 No Jaw Kit)

Specifications:

| Capacity | 1/2" - 1-1/4" CU |
|------------------------|-------------------------------|
| Calibration Interval | 32,000 Cycles (LED Indicator) |
| Approximate Cycle Time | 5 Seconds |
| Press Force | 5,400 lbs |
| Length / Weight | 12.8" / 3.8 lbs |
| | |

Includes: 2473-22 (3) Jaws (1/2", 3/4", 1");

2473-20 (No Jaws Included);

All Kits Include: (2) M12[™] REDLITHIUM[™] CP1.5 Battery

Packs, Charger, Carrying Case **Related Accessories:**

49-16-2450 1/2" CTS Jaw;

49-16-2451 3/4" CTS Jaw;

49-16-2452 1" CTS Jaw;

49-16-2453 1-1/4" CTS Jaw;

49-16-2450B 1/2" IPS Jaw; 49-16-2451B 3/4" IPS Jaw;

49-16-2451C 1/2" PEX Crimp (F1807 & F2159) Jaw;

49-16-2453C 3/4" PEX Crimp (F1807 & F2159) Jaw: **49-16-2454C** 1" PEX Crimp (F1807 & F2159) Jaw;

49-16-2455C 1-1/4" PEX Crimp (F1807) Jaw;

49-16-2456C 1-1/2" PEX Crimp (F1807) Jaw



3.5" High-Resolution LCD Screen Size Camera Resolution 640 x 480 Camera Head Diameter 12.5 mm (0.49") Head Movement Up to 270° PIVOTVIEW™ Camera 3 ft Cable Length

Up to 15 ft **Includes:** (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack,



2316-21 **Specifications:**

Wireless Distance

Wireless Distance

| Screen Size | 3.5" High-Resolution L |
|----------------------|------------------------|
| Camera Resolution | 640 x 480 |
| Camera Head Diameter | 12.5 mm (0.49") |
| Cable Length | 9 ft |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case

Up to 15 ft



Screen Size 3.5" High-Resolution LCD Camera Resolution 640 x 480 Camera Head Diameter 12.5 mm (0.49") Cable Length 3 ft Wireless Distance Up to 15 ft

Camera Accessories

Compatible with 2317-21, 2316-21, 2315-21

w/ PIVOTVIEW™

48-53-0155 M-SPECTOR FLEX[™] 3 ft Inspection Camera Cable

48-53-0151 M-SPECTOR FLEX™ 9 ft Inspection Camera Cable; 48-53-0150 M-SPECTOR FLEX™ 3 ft Inspection Camera Cable

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case



M12™ No-Hub Driver Kit

2455-22 (2455-20 Tool-Only)

| Specifications: | | |
|-----------------------------|-------------------------------|--|
| Torque Settings (3-Mode) | 60 in-lbs / 80 in-lbs / Drill | |
| RPM | 0 – 750 | |
| Chuck Type | 1/4" Hex | |
| Calibration Interval | 25,000 Cycles (LED Indicator) | |
| Weight | 2.7 lbs | |

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, (3) SHOCKWAVE™ Nut Drivers (1/4", 5/16", 3/8"), Charger, Carrying Case





2313-21 (2313-20 Tool-Only) Specifications:

Screen Size 2.7" High-Resolution LCD Display Resolution 320 x 240 Camera Head Diameter 9 mm (0.35") Cable Length 3 ft

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Charger, Contractor Bag

4 LEDs, 5 Settings

M12™ M-SPECTOR 360™ **9 ft Rotating Inspection Scope Kit**

2314-21

Specifications:

LED Brightness

| Screen Size | 2.7" High-Resolution LCI |
|----------------------|--------------------------|
| Display Resolution | 320 x 240 |
| Camera Head Diameter | 9 mm (0.35") |
| Cable Length | 9 ft |
| LED Brightness | 4 LEDs, 5 Settings |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Pipe Guide, Charger, Contractor Bag

M-SPECTOR 360™ Rotating **Inspection Scope Accessories**

Compatible with 2313-21, 2314-21

48-53-0112 3 Pc Accessory (Includes Hook, Magnet, Mirror Attachments); 48-53-0113 Pipe Guide Accessory



M12™ 102 x 77 Infrared **Camera Kit**

2258-21 Specifications

| Specifications: | | |
|-------------------|------------------------------|--|
| Sensor Resolution | 102 x 77 Pixels | |
| Temperature Range | 14°F – 626°F (-10°C – 330°C) | |
| LCD Display | 2.4" High Resolution | |
| Color Palettes | Iron, Rainbow, Gray | |
| Focus Method | Auto-Ranging | |
| Image Storage | Yes | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Protective Boot, Charger, Carrying Case



M12™ 12:1 Infrared TEMP-GUN™

2278-20 Tool-Only

Specifications

| 12:1 |
|------------------------------------|
| -22°F – 1,022°F (-30°C – 550°C) |
| +/-1.8% |
| Yes |
| Yes |
| Fixed, .95 |
| 6 ft |
| |

Battery and Charger Sold Separately





M12™ ROCKET™ Dual Power Tower Light

2132-20 Tool-Only

Specifications:

| Lumens | 1,400 / 700 |
|--------|--|
| Modes | High, Low |
| Height | 30.5" Collapsed, 5' 8" Fully Extended |
| Weight | 6.7 lbs |
| | |

Battery and Charger Sold Separately





M12™ ROVER™ Service & Repair Flood Light w/ USB Charging

2367-20 Tool-Only

Specifications:

| Lumens | 700 / 250 |
|---------------------|--|
| Modes | High, Low |
| Run-Time | 8 hr / 24 hr (XC4.0) |
| Water & Dust Rating | IP54 |
| USB Charger | 2.1A USB Charging port for External Devices |

Battery and Charger Sold Separately





M12™ Metal Flashlight Kit

2355-21 (2355-20 Tool-Only)

Specifications:

| Lumens | 800 / 325 / 800 |
|---------------------|---|
| Modes | High, Medium, Strobe |
| Beam Distance | 375 yd / 343 m |
| Beam Focus | Slide, Spot/Flood |
| Water & Dust Rating | IP54 |
| Structure | 6000 Series Aluminum, Type II Anodize Finish |
| Lenath / Weight | 9.0" / 1.2 lbs |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Lanyard, Charger

M12™ Spot Light

2353-20 Tool-Only

Specifications

| specifications. | |
|---------------------|-------------------|
| Lumens | 750 / 400 / 750 |
| Modes | High, Low, Strobe |
| Beam Distance | 700 yd / 640 m |
| Water & Dust Rating | IP54 |
| Length / Weight | 6.1" / 1.4 lbs |
| | |

Battery and Charger Sold Separately

Includes: Lanyard

25

M12™ Trouble Light w/ USB Charging

2362-20 Tool-Only

Specifications

| specifications: | |
|------------------------|--|
| Lumens | 400 / 200 / 40 / 400 |
| Modes | High, Medium, Low, Strobe |
| Run-Time | Up to 67 Hours |
| Beam Pattern | Adjustable Task - Area |
| Water & Dust Rating | IPX4 |
| Hands-Free | 2 Hooks for Hanging |
| USB Charger | 2.1A USB Charging Port for External Devices |
| Length / Weight | 10.5" / 1.0 lb |
| Battery and Charger So | ld Separately |

M12™ ROVER™ Mounting Flood Light

CHARGES

USB

2364-20 Tool-Only

Specifications:

| Lumens | 1,000 / 400 / 200 |
|---------------------|---|
| Modes | High, Medium, Low |
| Hands-Free | Integrated Magnet, Spring Loaded Clamp |
| Water & Dust Rating | IP54 |
| Length / Weight | 7.5" / 2.2 lbs |
| | |

Battery and Charger Sold Separately

M12™ Underhood Light Kit

2125-21XC (2125-20 Tool-Only)

Specifications:

| Lumens | 1,350 / 600 |
|-----------------|--|
| Modes | High, Low |
| Hooks | FINISHGUARD™ to Resist Wear & Provide Lasting Protection |
| Length / Weight | 48" Collapsed, 78" Fully Extended / 2.2 lbs |

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, Charger

M12™ Stick Light

2351-20 Tool-Only

Specifications:

| Lumens | 220 |
|---------------------|--|
| Hands-Free | Multi-Position Stainless Steel Hook |
| Water & Dust Rating | IP54 |
| Length / Weight | 9.3" / 0.6 lbs |
| | |

Battery and Charger Sold Separately

Related Accessory:

49-24-2351 M12[™] Stick Light Magnet Holds light to metal surfaces for hands-free use

M12™ Work Light

49-24-0146 Tool-Only

Specifications:

| Lumens | 100 |
|---------------|-------------------|
| Hands-Free | Integrated Magnet |
| Head Rotation | 90° |

Battery and Charger Sold Separately



M12™ Heated TOUGHSHELL™ Jacket Kit

Black 202B-21 (S – 3X)*, 202B-20 Jacket-Only

Gray 202G-21 (S – 3X)*, 202G-20 Jacket-Only

Red 202R-21 (S – 3X)*, 202R-20 Jacket-Only

| specifications: | |
|-----------------|--|
|-----------------|--|

| Heat Zones | 3 (Chest, Back, Pockets) |
|------------------------|----------------------------------|
| Heat Settings | 3 (High, Medium, Low) |
| Run-Time | Up to 8 Hours |
| Outer Material | TOUGHSHELL™ Stretch Polyester |
| Wind / Water Resistant | Yes |
| Washer / Drver Safe | Yes |

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source

M12™ Women's Heated SOFTSHELL Jacket Kit

Black 232B-21 (S - 2X)*, 232B-20 Jacket-Only **Specifications:**

Specifications:

| Heat Zones | 3 (Back, Collar, Pockets) | |
|------------------------|---------------------------|---|
| Heat Settings | 3 (High, Medium, Low) | 4 |
| Run-Time | Up to 8 Hours | |
| Outer Material | Polyester SOFTSHELL | |
| Wind / Water Resistant | Yes | |
| Washer / Dryer Safe | Yes | |

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source

M12™ Heated QUIETSHELL Jacket Kit

Camo 222C-21 (S - 3X)*, 222C-20 Jacket-Only

Specifications:

| Heat Zones | 3 (Chest, Back, Pockets) | |
|------------------------------------|---|---|
| Heat Settings | 3 (High, Medium, Low) | 1 |
| Run-Time | Up to 8 Hours | - |
| Outer Material | QUIETSHELL Stretch Polyester | |
| Wind / Water Resistant | Yes | |
| Washer / Dryer Safe | Yes | |
| Realtree EDGE © 2021 of Jordan Out | door Enterprises, Ltd., all rights reserved | |

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source

M12[™] Heated AXIS[™] Layering System w/ HYDROBREAK[™] Rain Shell Kit

Black/Gray 203RN-21 (S - 3X)*

Specifications:

| 3 (Chest, Back, Shoulders) |
|--|
| 3 (High, Medium, Low) |
| Up to 8 Hours |
| Polyurethane Laminate / Ripstop Polyester |
| 10K mm |
| Yes |
| |

Includes: HYDROBREAK[™] Rain Shell, M12[™] Heated AXIS[™] Jacket, (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source



M12™ Heated AXIS™ Layering System w/ GRIDIRON™ Work Shell Kit

Black 255B-21 (S - 3X)*

Specifications:

| | Heat Zones | 3 (Chest, Back, Shoulders) |
|--|---------------------|-----------------------------|
| | Heat Settings | 3 (High, Medium, Low) |
| | Run-Time | Up to 8 Hours |
| | Outer Material | GRIDIRON™ Ripstop Polyester |
| | Insulation | 60G Body / 40G Sleeve |
| | Washer / Dryer Safe | Yes |

Includes: GRIDIRON™ Work Shell, M12™ Heated AXIS™ Jacket, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source



M12™ Heated AXIS™

Black 203B-21 (S – 3X)*, 203B-20 Jacket-Only 2030G Olive Green 203OG-21 (S - 3X)*, 203OG-20 Jacket-Only **Specifications:**

| Heat Zones | 3 (Chest, Back, Shoulders) |
|------------------------|----------------------------|
| Heat Settings | 3 (High, Medium, Low) |
| Run-Time | Up to 8 Hours |
| Outer Material | AXIS™ Ripstop Polyester |
| Wind / Water Resistant | Yes |
| Washer / Dryer Safe | Yes |

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source



M12™ Women's Heated AXIS **Jacket Kit**

Black 233B-21 (S - 2X)*, 233B-20 Jacket-Only **Specifications:**

| • | |
|------------------------|----------------------------|
| Heat Zones | 3 (Chest, Back, Shoulders) |
| Heat Settings | 3 (High, Medium, Low) |
| Run-Time | Up to 8 Hours |
| Outer Material | AXIS™ Ripstop Polyester |
| Wind / Water Resistant | Yes |
| Washer / Dryer Safe | Yes |

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, Charger and Power Source







M12™ Heated AXIS™ **Vest Kit**

Black 303B-21 (S - 3X)*, 303B-20 Vest-Only **Specifications:**

| • | |
|------------------------|-------------------------|
| Heat Zones | 2 (Chest, Back) |
| Heat Settings | 3 (High, Medium, Low) |
| Run-Time | Up to 6 Hours |
| Outer Material | AXIS™ Ripstop Polyester |
| Wind / Water Resistant | Yes |
| Washer / Dryer Safe | Yes |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, M12™ Battery Holder, Charger

M12™ Women's Heated AXIS™ **Vest Kit**

Black 333B-21 (S - 2X)*, 333B-20 Vest-Only Specifications:

| Opcomoditions: | |
|------------------------|-------------------------|
| Heat Zones | 2 (Chest, Back) |
| Heat Settings | 3 (High, Medium, Low) |
| Run-Time | Up to 6 Hours |
| Outer Material | AXIS™ Ripstop Polyester |
| Wind / Water Resistant | Yes |
| Washer / Dryer Safe | Yes |
| | |

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, M12™ Battery Holder, Charger

M12™ Heated Hoodie Kit

Black 302B-21 (S - 3X)*, 302B-20 Hoodie-Only Gray 302G-21 (S - 3X)*, 302G-20 Hoodie-Only Red 302R-21 (S - 3X)*,

302R-20 Hoodie-Only Navy Blue 302BL-21 (S - 3X)*, 302BL-20 Hoodie-Only

Wind Resistant Washer / Dryer Safe

Specifications: Heat Zones 2 (Chest, Back) **Heat Settings** 3 (High, Medium, Low) Run-Time Up to 6 Hours

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, M12™ Battery Holder, Charger





405B-21 (S - 3X)*


Specifications:

| Heat Zones | 2 (Chest, Back) |
|---------------------|---|
| Heat Settings | 2 (High, Low) |
| Run-Time | Up to 3 Hours |
| Material | WORKSKIN [™] Midweight Fabric Construction |
| Washer / Dryer Safe | Yes |

Includes: (2) REDLITHIUM™ USB 3.0AH Batteries, USB Charger/Controller, Heavy Duty Cord and Wall Plug



2475-21XC (2475-20 Tool-Only) Specifications:



Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack. (4) Attachments (Ball Inflation Needle, Presta Chuck,

USB Rechargeable **Heated Gloves Kit**

561-21 (M - XL)*

| • | specifications: | | |
|---|------------------------|-----------------------------|-----------------|
| | Heat Zones | 2 (Fingers, Back of Hand) | |
| | Heat Settings | 3 (High, Medium, Low) | |
| | Run-Time | Up to 6 Hours | POWERED BY |
| | Material | GRIDIRON™ Ripstop Polyester | REDLITHIU US |
| | Wind / Water Resistant | Yes | RECHARGEA |
| | | | |

Includes: (2) REDLITHIUM™ USB Batteries, (2) USB Charger/Controllers, Heavy Duty Cord and Wall Plug

M18™ / M12™ Wireless **Jobsite Speaker**

2891-20 Tool-Only

Specifications:

| Modes | Bluetooth®, AUX (Cable Not Included) |
|------------------|--------------------------------------|
| Bluetooth® Range | 100 ft |
| | |

Battery and Charger

Includes: AC Adapter



USB Charging Port 2.1A USB Charging Port for External Devices

Sold Separately



POWERED BY



M12™ Radio + Charger

2951-20 Tool-Only

Specifications:

| Modes | AM, FM, Bluetooth® |
|-------------------|--|
| Bluetooth® Range | 100 ft |
| USB Charging Port | 2.1A USB Charging port for External Devices |

Battery and Charger Sold Separately

Includes: AC Adapter, (2) AAA Batteries



UŠB







Bluetooth

M12™ Wireless Jobsite Speaker

2592-20 Tool-Only

Specifications:

| Modes | Bluetooth®, AUX (Cable Not Included) |
|-------------------|--|
| Bluetooth® Range | 30 ft |
| USB Charging Port | 2.1A USB Charging Port for External Devices |

Battery and Charger Sold Separately







M12™ Compact Inflator Kit

| PSI Rating | 0 - 120 PSI |
|-----------------|---|
| Hose Length | 26" |
| Gauge Accuracy | +/- 3% |
| Duty Cycle | 50% at 10 Minutes On and 10 Minutes Off |
| Height / Weight | 7.5" / 2.2 lbs |
| | |

Inflator Nozzle, Schrader Chuck), Charger

M12 FLEL

1.6 Gallon Wet/Dry Vacuum Kit 0960-21 (0960-20 Tool-Only)

Specifications:

| specifications. | • |
|-----------------------------------|---------------------|
| Air Volume | 45 CFM |
| Suction (H ₂ 0) | 42" |
| Run-Time (w/ M12™ XC6.0 Batter | Up to 26 Min ry) |
| Inlet Diameter | 1-1/4" |
| Weight | 9.7 lbs |

HEPA

Includes: HEPA Filter, Crevice Tool, Utility Nozzle, Wall Mount, 5' Flexible Hose; 0960-21: (1) M12™ REDLITHIUM™ XC6.0 Battery Pack, Charger

Related Accessories: **49-90-1900** HEPA Filter; **49-90-2015** Foam Wet Filter;

49-90-2017 1-1/4" Round Brush Tool; 49-90-2018 Vacuum Power Tool Adapter



M12™ Compact Vacuum

0850-20 Tool-Only

Specifications:

| Air Volume | 33 CFM | |
|----------------------------|---------------|--|
| Suction (H ₂ 0) | 15" | |
| Run-Time (XC4.0) | Up to 29 mins | |
| Inlet Diameter | 1-1/4" | |
| Weight | 2.3 lbs | |
| | | |

Battery and Charger Sold Separately

Includes: Utility Nozzle, Extension Wand, Crevice Tool, Filter Assembly Related Accessory:

49-90-1950 Filter

*MODEL NUMBER EXAMPLE

M12™ Power Source

49-24-2310

Specifications:

| USB Charging Port | 2.1A USB Charging Port for External Devices |
|---------------------|--|
| On-Board Fuel Gauge | Yes |
| Powered By | All M12™ Batteries |
| | |

Battery Sold Separately

Powers all MILWAUKEE® M12™ Heated Gear

Related Accessory:

48-59-1201 M12™ Compact Charger and Power Source

M12™ REDLITHIUM™ XC4.0 **System Starter Kit**

M12™ REDLITHIUM™ CP2.0

System Starter Kit

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Charger

M12™ Four Bay

Specifications:

Integrated Hang-Holes

Cell Voltage Monitoring

Batteries Sold Separately

On-Board Indicator Light Yes

Charge Sequence

Sequential Charger

48-59-2440

48-59-2420

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, Charger



M18™ & M12™ Rapid Charger

48-59-1808

_:4:

| Specifications: | |
|--------------------------|--|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| Charge Speed | Charges Individual Batteries up to 40% Faster |
| On-Board Indicator Light | Yes |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |
| | |

Batteries Sold Separately

M18™ & M12™ Multi-Voltage Charger

Specifications:

| opooinioa anonioi | |
|--------------------------|--|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| Integrated Hang-Holes | Yes |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| | |

48-59-1812

Batteries Sold Separately

Specifications:

| = | |
|--------------------------|--|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| | |

Batteries Sold Separately

M18™ & M12™ Vehicle Charger 48-59-1810





| Compatibility | All M12™ Batteries |
|--------------------------|---|
| USB Charging Port | 2.1A USB Charging Port for External Devices |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| Charges By | USB Port or AC Outlet |
| | |

Battery Sold Separately

Includes: 3 ft Micro-USB Cable and 2.1A Wall Charger

M18™ & M12™ Rapid Charge Station

All M12™ Batteries

(First In, First Charged)

Battery Charges First

Manually Designate which

Sequential

Yes

48-59-1807

48-59-1204

Compatibility

Skip Button

| Specifications: | |
|-------------------------|---|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Charges 3 Batteries Simultaneously |
| Charge Speed | Charges Individual Batteries up to 40% Faster |
| Capacity | Holds (3) M18 [™] and (3) M12 [™] Batteries |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |
| Pass-Through Plug | Yes |

and Power Source 48-59-1201

Specifications:

M12™ Charger

48-59-2401

Specifications:

| Compatibility | All M12™ Batteries |
|--------------------------|--------------------|
| Integrated Hang-Holes | Yes |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |

Battery Sold Separately







REDLITHIUM BATTERIES GUIDE











M12™ REDLITHIUM™ CP2.0 Battery Pack



48-11-2401 M12[™] REDLITHIUM[™] CP1.5 Battery Pack

48-11-2411

2-Pack



More power and run-time



48-11-2460 M12™ REDLITHIUM™ XC6.0 Battery Pack



48-11-2440 M12™ REDLITHIUM™ XC4.0 Battery Pack



48-11-2402 M12™ REDLITHIUM™ XC3.0 Battery Pack

48-11-2412 2-Pack

Manualis INTERNSTRALLY SAFE GLASS L. B. W/ DOY



REDLITHIUM™ USB Hard Hat Headlamp Kit

2111-21

| Lumens | 475 / 300 / 300, 150, 25 |
|---------------------|---|
| Modes | Spot/Flood, Spot – High, Flood – High/Medium/Low |
| Water & Dust Rating | IP54 |
| Powered By | REDLITHIUM™ USB |
| | |

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord, Hard Hat Clips



| POWERED BY |
|-------------------|
| REDLITHIUM USB |
| RECHARGEABLE |

REDLITHIUM™ USB 800L Compact Flashlight

2160-20

2112-21

Lumens Modes

Height Powered By

Hands-Free

Water & Dust Rating

2 ft Heavy Duty USB Cord

| Lumens | 800 / 100 |
|---------------------|-----------------|
| Modes | High, Low |
| Spot Beam Distance | 150 m |
| Beam Focus | Bullseye Beam |
| Water & Dust Rating | IP54 |
| Powered By | REDLITHIUM™ USB |
| | |

Includes: (1) REDLITHIUM™ USB Battery Pack, 2 ft Heavy Duty USB Cord

REDLITHIUM™ USB ROVER™

445 / 100

High, Low

IP54 6.0"

Dual Magnets

REDLITHIUM™ USB

Magnetic Flood Light Kit









REDLITHIUM™ USB Portable Power Source and Charger

REDLITHIUM™ USB3.0 Battery

4V

LITHIUM-ION

48-59-2012

48-59-2013

Height

Specifications: Cell Chemistry

On-Board Indicator Light

Cell Voltage Monitoring

USB Charging Port

48-11-2131

Amp Hours Cell Chemistry

Voltage

Specifications:

Specifications:

| Cell Chemistry | LITHIUM-ION |
|--------------------------|---|
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| USB Charging Port | 2.1A USB Charging Port for External Devices |
| Height | 3.9" |

Includes: REDLITHIUM™ USB Portable, 2 ft Heavy Duty USB Cord, Power Source and Charger

REDLITHIUM™ USB Portable

Power Source and Charger Kit

Yes

3.9"

Includes: (1) REDLITHIUM™ USB Battery, REDLITHIUM™ USB Portable, 2 ft Heavy Duty USB Cord, Power Source and Charger USB

LITHIUM-ION

2.1A USB Charging Port

for External Devices







MILWAUKEE® C I, II, III / D 1 Intrinsically Safe Spot/Flood Headlamp

2004hzl

| Lumens | 310 / 155 / 235 / 155 / 25 |
|------------------------------|---|
| Modes | Spot/Flood Hybrid, Spot High, Flood High, Flood Medium, Flood Low |
| Intrinsically Safe Rating | Classes I, II, III / Division 1 Groups A – G |
| Impact Rating | 9 ft |
| Water & Dust Rating | IP64 |
| Powered By | (3) AAA |

Includes: Rubber Strap, Nylon Strap, DUAL LOCK™ Adhesive, (4) Hard Hat Clips, Hex Wrench, (3) AAA Batteries



MILWAUKEE® Spot/Flood Headlamp

2104

| Lumens | 450 / 350, 150, 25 / 350 |
|---------------------|---|
| Modes | Spot/Flood, Flood - High/Medium/Low, Spot |
| Spot Beam Distance | 100 m |
| Water & Dust Rating | IP54 |
| Powered By | (3) AAA |

Includes: (4) Hard Hat Clips, (3) AAA Batteries



REDLITHIUM™ USB **Low-Profile Headlamp Kit**

2115-21

2116-21

Lumens

Modes

BEACON™ Mode

Powered By

Spot Beam Distance

Water & Dust Rating

| Lumens | 600 / 350 / 125 / 25 |
|---------------------|------------------------|
| Modes | High, Medium, Low, Eco |
| Battery Position | Rear |
| Water & Dust Rating | IP54 |
| Powered By | REDLITHIUM™ USB |
| | |

REDLITHIUM™ USB BEACON™

600 / 400, 200, 25 / 400

Flood - High/Medium/Low,

Spot/Flood,

Spot - High

125 m

IP54

Steady & Blinking

REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord, (4) Hard Hat Clips

Hard Hat Light Kit





REDLITHIUM™ USB Pivoting Flashlight Kit

Includes: (1) REDLITHIUM™ USB Battery,

2113-21

| Lumens | 500 / 400 / 100 |
|---------------------|---|
| Modes | Spot - High, Flood - High, Flood - Low |
| Spot Beam Distance | 155 m |
| Pivoting Head | 110° |
| Water & Dust Rating | IP54 |
| Height | 6.3" |
| Powered By | REDLITHIUM™ USB |
| | |

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord

REDLITHIUM™ USB ROVER™ **Pivoting Flood Light Kit**

2114-21

| Lumens | 550 / 250 / 100 |
|---------------------|-------------------|
| Modes | High, Medium, Low |
| Pivoting Head | 210° |
| Water & Dust Rating | IP54 |
| Height | 4.4" |
| Powered By | REDLITHIUM™ USB |
| | |



Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord

MILWAUKEE® Penlight 2105

Lumens 100 Water & Dust Rating IP67 Height 5.4" Powered By (2) AAA

Includes: (2) AAA Batteries



CHARGES

2107 Lumens 325 / 25

325L Focusing Flashlight

Modes High, Low Spot Beam Distance 115 m Beam Focus Slide, Spot/Flood Water & Dust Rating IP67 5.0" Height

(3) AAA

Includes: (3) AAA Batteries

Powered By

2107S Also Available, Includes Holster

REDLITHIUM™ USB 1,100L **Twist Focus Flashlight**

Includes: (1) REDLITHIUM™ USB Battery,


2 ft Heavy Duty USB Cord, (2) Hard Hat Clips

2161-21

| Lumens | 1,100 / 600 / 100 |
|---------------------|-------------------------|
| Modes | High, Medium, Low |
| Spot Beam Distance | 175 m |
| Beam Focus | Twist Focus, Spot/Flood |
| Water & Dust Rating | IP54 |
| Powered By | REDLITHIUM™ USB |










Includes: (2) REDLITHIUM™ USB Batteries, 2 ft Heavy Duty USB Cord, REDLITHIUM™ USB Charger & Portable Power Source, 12V DC Vehicle Plug, 2.1A Wall Plug

MILWAUKEE® Headlamp

2103



Includes: (4) Hard Hat Clips, (3) AAA Batteries

ROVER™ Magnetic Flood Light

| Lumens | 300 / 100 |
|---------------------|-----------|
| Modes | High, Low |
| Water & Dust Rating | IP54 |
| Height | 4.8" |
| Powered By | (2) AA |

Includes: (2) AA Batteries





32



| | | | | PIE | 2 CE K | ITS | | | | PIECE | 4 ≣ KITS |
|---|---------|---------|---------|---------|-----------|---------|---------|---------|---------|---------|-------------|
| M12 [™] | -52 | 52 | -52 | 52 | .52 | 12 | -52 | -52 | -52 | -24 | -24 |
| COMBO KITS | 2490-22 | 2491-22 | 2494-22 | 2495-22 | 2497-22 | 2577-21 | 2582-22 | 2596-22 | 2598-22 | 2493-24 | 2498-24 |
| Kit Tool Total | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 4 | 4 |
| M12 [™] 1/4" Hex Screwdriver | | | | | | | | | | | |
| M12 FUEL™ 1/2" Hammer Drill/Driver | | | | | | | | | | | |
| M12 [™] 3/8" Hammer Drill/Driver | | | | | | | | | | | |
| M12 FUEL™ 1/2" Drill/Driver | | | | | | | | | | | |
| M12 [™] 3/8" Drill/Driver | | | | | | | | | | | |
| M12 FUEL™ 1/4" Hex Impact Driver | | | | | | | | | | | |
| M12™ 1/4" Hex Impact Driver | | | | | | | | | | | |
| M12 FUEL™ SURGE™ 1/4" Hex Hydraulic Driver | | | | | | | | | | | |
| M12 [™] 3/8" Impact Wrench | | | | | | | | | | | |
| M12™ HACKZALL® Reciprocating Saw | | | | | | | | | | | |
| M12 [™] Multi-Tool | | | | | | | | | | | |
| M12™ 1/4" Ratchet | | | | | | | | | | | |
| M12™ TRAPSNAKE™ 6' Toilet Auger | | | | | | | | | | | |
| TRAPSNAKE™ 4' Urinal Auger Extension | | | | | | | | | | | |
| M12™ Work Light | | | | | | | | | | | |
| Also Includes | | | | | | | | | | | |
| M12 [™] Charger | | | | | | | | | | | |
| M12™ REDLITHIUM™ CP1.5 Battery Pack | 2 | 2 | 2 | 2 | 2 | 1 | | | | 2 | 2 |
| M12™ REDLITHIUM™ CP2.0 Battery Pack | | | | | | | 1 | 1 | 1 | | |
| M12 [™] REDLITHIUM [™] XC4.0 Battery Pack | | | | | | | 1 | 1 | 1 | | |
| Contractor Bag | | | | | | | | | | | |



M12™ REDLITHIUM™ CP3.0/XC6.0

■ Up to 3X More Run-Time

■ Up to 20% More Power

Over 2X More Life

















M18

PERFORMANCE DRIVEN TRADE FOCUSED SYSTEM WIDE





ALL M18 TOOLS FIT M18 BATTERIES
200+ TOOLS



DRIVEN TO OUTPERFORM.

For the first time in power tool history, M18 FUEL™ products are delivering game-changing corded performance without the cord. The motors on MILWAUKEE® M18 FUEL™ tools are more powerful and energy efficient – outliving any other brand. To add to the revolutionary technology, M18 FUEL™ possesses the smartest electronics found in any power tool. REDLINK PLUS™ electronics manage an array of power requirements across 200+ M18™ tools using one common battery. MILWAUKEE® built, the M18™ Battery delivers cleaner, more consistent power, lasts longer and delivers more run-time in the harshest jobsite conditions.









POWERSTATE BRUSHLESS MOTOR

This best-in-class brushless motor works harder and lives longer than all leading competitors.

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors
- Longer Motor Life





PREDLINK PLUS™INTELLIGENCE

The most advanced system of hardware and software in cordless power tool electronics today.

- Most Advanced Electronic System
 on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life



REDLITHIUM™ XC5.0 BATTERY PACK

Compatible with the entire M18™ System, it delivers more run-time, power and recharges than the competition.

- Most Durable Pack on the Market
- Over 2X More Recharges than Leading Competitor
- Fuel Gauge Displays Remaining Charge
- Operates Below -18°C / 0°F





PERFORMANCE DRIVEN
TRADE FOCUSED
SYSTEM WIDE

M18 FUEL 1/2" Hammer Drill/Driver w/ ONE-KEY™ Kit

2806-22 (2806-20 Tool-Only)

Specifications:

| Peak Torque | 1,200 in-lbs |
|-----------------|---------------------------|
| RPM | 0 - 550 / 0 - 2,000 |
| BPM | 0 – 32,000 |
| DRIVE CONTROL™ | 3-Mode (Customizable) |
| Chuck Type | 1/2" All Metal Ratcheting |
| Length / Weight | 6.9" / 4.8 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



1/2" Hammer Drill/Driver Kit

2804-22 (2804-20 Tool-Only)

Specifications:

| Peak Torque | 1,200 in-lbs |
|-----------------|---------------------------|
| RPM | 0 - 550 / 0 - 2,000 |
| BPM | 0 – 32,000 |
| Chuck Type | 1/2" All Metal Ratcheting |
| Length / Weight | 6.9" / 4.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18™ 1/2" Hammer Drill/Driver Kit

2607-22, 2607-22CT (2607-20 Tool-Only)

Specifications:

| Peak Torque | 500 in-lbs |
|-----------------|---------------------------|
| RPM | 0 - 450 / 0 - 1,800 |
| BPM | 0 – 28,800 |
| Chuck Type | 1/2" All Metal Ratcheting |
| Length / Weight | 7.8" / 4.5 lbs |
| | |

Includes: 2607-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; 2607-22CT (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; All Kits Include: Multi-Voltage Charger, Carrying Case



1/2" Drill/Driver w/ ONE-KEY™ Kit 2805-22 (2805-20 Tool-Only)

Specifications:

| Peak Torque | 1,200 in-lbs |
|-----------------|---------------------------|
| RPM | 0 - 550 / 0 - 2,000 |
| DRIVE CONTROL™ | 3-Mode (Customizable) |
| Chuck Type | 1/2" All Metal Ratcheting |
| Lenath / Weight | 6.9" / 4.8 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18 FUEL 1/2" Drill/Driver Kit

2803-22 (2803-20 Tool-Only)

Specifications:

| = | |
|-----------------|---------------------------|
| Peak Torque | 1,200 in-lbs |
| RPM | 0 - 550 / 0 - 2,000 |
| Chuck Type | 1/2" All Metal Ratcheting |
| Length / Weight | 6.9" / 4.8 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18 FUEL

Mud Mixer w/ 180° Handle Kit

2810-22 (2810-20 Tool-Only)

Specifications:

| RPM | 0 – 550 |
|-----------------|----------------------|
| DRIVE CONTROL™ | 8-Speed Dial |
| Handle Type | 180° Rotating Handle |
| Chuck Type | 1/2" Keyed |
| Length / Weight | 16.6" / 7.7 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Chuck Key, Multi-Voltage Charger, Contractor Bag



M18™ 1/2" Compact **Brushless Drill/Driver Kit**

2801-22CT (2801-20 Tool-Only)

Specifications:

| | Peak Torque | 500 in-lbs |
|--|-----------------|---------------------------|
| | RPM | 0 - 500 / 0 - 1,800 |
| | Chuck Type | 1/2" All Metal Ratcheting |
| | Length / Weight | 6.5" / 3.7 lbs |
| | - 3 3 - | |

Includes: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs,



Belt Clip, Multi-Voltage Charger, Carrying Case



HOLE HAWG® 1/2" Right Angle Drill Kit

2807-22 (2807-20 Tool-Only)

Specifications:

| RPM | 1 – 1,500 |
|-----------------|---|
| Chuck Type | 1/2" All Metal Keyed |
| Capacity | For Augers up to 1-1/4 Self-Feed Bits up to 2" |
| Built-In LED | Yes |
| Length / Weight | 15.6" / 7.7 lbs |

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC6.0 Battery Packs, Chuck Key, Key Holder, Top Handle, Rapid Charger, Carrying Case



M18™ 1/2" Compact **Drill/Driver Kit**

2606-22CT (2606-20 Tool-Only)

Specifications:

| Peak Torque | 500 in-lbs |
|-----------------|---------------------------|
| RPM | 0 - 450 / 0 - 1,800 |
| Chuck Type | 1/2" All Metal Ratcheting |
| Length / Weight | 7.3" / 3.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs, Multi-Voltage Charger, Carrying Case



M18™ 3/8" Right Angle **Drill/Driver Kit**

2615-21, 2615-21CT (2615-20 Tool-Only)

Specifications:

| Peak Torque | 125 in-lbs |
|-----------------|-----------------------------|
| RPM | 0 – 1,500 |
| Clutch Settings | 11 Settings plus Drill Mode |
| Chuck Type | 3/8" Single Sleeve |
| Head Profile | 3-3/4" |
| Weight | 4.3 lbs |

2615-21CT (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack; All Kits Include: Multi-Voltage Charger, Carrying Case



M18 FUEL

HOLE HAWG® Right Angle Drill Kit w/ QUIK-LOK 2808-22 (2808-20 Tool-Only)

Specifications:

| Specifications. | | |
|-----------------|---|--|
| RPM | 1 – 1,500 | |
| Chuck Type | 7/16" QUIK-LOK™ | |
| Capacity | For Augers up to 1-1/4 Self-Feed Bits up to 2" | |
| Built-In LED | Yes | |
| | | |

Length / Weight 15.6" / 7.1 lbs



Includes: (2) M18[™] REDLITHIUM[™] XC4.0 Battery Packs, Belt Clip, Side Handle, Multi-Voltage Charger, Carrying Case











Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs, Top Handle, Rapid Charger, Carrying Case

TRADE FOCUSED M18

M18 FUEL SUPER HAWG™ 1/2" Right Angle Drill Kit

2809-22 (2809-20 Tool-Only)

Specifications:

| RPM | 0 – 1,550 | 119 |
|-------------------|---|-----|
| Chuck Type | 1/2" All Metal Keyed | |
| Capacity | For Self-Feed Bits up to 4-5/8"; Hole Saws up to 6-1/4" | |
| Mechanical Clutch | In Low Speed | |
| Length / Weight | 20.5" / 14.4 lbs | |

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC6.0 Battery Packs, Top Handle, Side Handle, Chuck Key, Rapid Charger, Contractor Bag

M18 FUEL

SUPER HAWG™ Right Angle Drill Kit w/ QUIK-LOK™

2811-22 (2811-20 Tool-Only) **Specifications:**

| RPM | | 0 – 1,550 |
|---------|-----|--------------------|
| Chuck 7 | уре | 7/16" Hex QUIK-LC |
| Capacit | У | For Self-Feed Bits |

up 4-5/8"; Hole Saws up to 6-1/4" Mechanical Clutch In Low Speed Length / Weight 20.5" / 14.9 lbs

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs, Top Handle, Side Handle, Rapid Charger, Contractor Bag

1-1/2" Magnetic Drill Kit

2787-22HD

Specifications:

| Capacity | 1-1/2" Annular Cutter; 1/2" Twist Bit |
|---------------------------|--|
| RPM | 400 / 690 |
| Magnet | Operates Without Electricity |
| Dimensions (L x W x H) | 13.8" x 7.5" x 15.5" |
| Weight | 30.5 lbs |

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Packs, Magnetic Lubrication Tank, 3/4" Weldon to 1/2" Chuck Adapter, Chuck Key, (2) 1" Retracting Pilot Pins, Safety Strap, Rapid Charger, Carrying Case

M18 FUEL 1-1/2" Lineman **Magnetic Drill Kit**

2788-22HD **Specifications:**

| Capacity | 1-1/2" Annular Cutter; 1/2" Twist Bit |
|----------|--|
| RPM | 400 / 690 |
| Magnet | Operates Without Electricity |
| | |

13.8" x 7.5" x 15.5" Dimensions $(L \times W \times H)$ 30.4 lbs Weight

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs, Magnetic Lubrication Tank, 3/4" Weldon to 1/2" Chuck Adapter, Chuck Key, (2) 1" Retracting Pilot Pins, Safety Strap, 12V Inverter, Rapid Charger, Carrying Case

M18 FLEL 1-3/4" SDS Max Rotary Hammer w/ ONE-KEY™ Kit

2718-22HD, 2718-21HD (2718-20 Tool-Only) Specifications:

| Impact Energy | 8.1 ft-lbs |
|---------------------|----------------------------------|
| RPM | 0 – 380 |
| BPM | 0 – 2,900 |
| Clutch | AUTOSTOP™ E-Clutch |
| Vibration | 10 m/s ² |
| 2-Mode Operation | Rotary Hammer and Hammer Only |
| Weight | 19.7 lbs |
| | |



Includes: 2718-22HD (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs; **2718-21HD** (1) M18™ REDLITHIUM™ HIGH OUTPUT™

All Kits Include: Side Handle, Grease Tube, Rapid Charger,



1-9/16" SDS Max **Rotary Hammer Kit**

2717-22HD (2717-20 Tool-Only)

Specifications:

HD12.0 Battery Pack;

| RPM | 0 - 440 |
|------------------|--------------|
| BPM | 0 – 3,000 |
| Impact Energy | 5.0 ft-lbs |
| 2-Mode Operation | Rotary Hamme |
| Weight | 13.8 lbs |



Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs, Side Handle, Depth Rod, Rapid Charger, Carrying Case

SDS MAX

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor

M18 FUEL 1-1/8" SDS Plus **Rotary Hammer Kit** 2715-22, 2715-22DE (2715-20 Tool-Only)

Specifications:

| RPM | 0 – 1,350 | |
|------------------|---|-----|
| BPM | 0 – 5,000 | |
| Impact Energy | 3.3 ft-lbs | |
| 3-Mode Operation | Rotary Hammer, Hammer Only and Rotation C | nly |
| Weight | 10.1 lbs | |

Includes: 2715-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger; 2715-22DE (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, HAMMERVAC™ Dedicated Dust Extractor, HEPA Filter, Replacement Nozzle, Multi-Voltage Charger;

All Kits Include: Side Handle, Depth Rod, Carrying Case





Includes: Replacement Nozzle and HEPA Filter

M18™ HAMMERVAC™

2715-DE

Specifications:

| Compatibility | For use with 2715-20 |
|--------------------------------------|--|
| In-Line Dedicated Design | Engineered to Fit in the Most Confined Workspaces |
| Adjustable Depth Stop and Ruler | Easily and Precisely Adjust for Accurate Hole Depths |
| Replaceable Certified HEPA Filter | Filters 99.97% of Debris 0.3 Microns and Above |
| Max Bit Size | 5/8" |

M18™ 7/8" SDS Plus OSHA HEPA **TABLE 1**

Rotary Hammer Kit 2605-22 (2605-20 Tool-Only)

Specifications:

| RPM | 0 – 1,400 |
|------------------|--|
| BPM | 0 – 4,800 |
| Impact Energy | 1.4 ft-lbs |
| 3-Mode Operation | Rotary Hammer, Hammer Only and Rotation Only |
| Weight | 7.2 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, Side Handle, Depth Rod, Multi-Voltage Charger, Carrying Case **Related Accessory:**

2306-22 M12™ HAMMERVAC™ Universal Dust Extractor

M18 FLEL 1" SDS Plus **Rotary Hammer Kit**

2712-22, 2712-22DE (2712-20 Tool-Only)

Specifications:

| RPM | 0 – 1,400 |
|------------------|--|
| BPM | 0 – 4,900 |
| Impact Energy | 1.7 ft-lbs |
| 3-Mode Operation | Rotary Hammer, Hammer Only and Rotation Only |
| Weight | 9.4 lbs |

OSHA HEPA

TABLE 1

Includes: 2712-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; 2712-22DE (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, HAMMERVAC™ Dedicated Dust Extractor, HEPA Filter, Replacement Nozzle, Multi-Voltage Charger;

All Kits Include: Side Handle, Depth Rod, Carrying Case

M18[™] HAMMERVAC[™] **Dedicated Dust Extractor**

2712-DE

Specifications:

| Compatibility | For use with 2712-20 |
|--------------------------------------|--|
| In-Line Dedicated Design | Engineered to Fit in the Most Confined Workspaces |
| Adjustable Depth Stop and Ruler | Easily and Precisely Adjust for Accurate Hole Depths |
| Replaceable Certified HEPA Filter | Filters 99.97% of Debris 0.3 Microns and Above |
| Max Bit Size | 5/8" |

Includes: Replacement Nozzle and HEPA Filter

M18™ 5/8" SDS Plus **Rotary Hammer Kit**

2612-22, 2612-21 (2612-20 Tool-Only)

Specifications:

| RPM | 0 - 1,300 | |
|------------------|------------------|-----------------|
| BPM | 0 – 7,000 | |
| Impact Energy | 1.0 ft-lbs | |
| 2-Mode Operation | Rotary Hammer an | d Rotation Only |
| Weight | 5.5 lbs | |
| | | |

Includes: 2612-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; 2612-21 (1) M18™ REDLITHIUM™ XC3.0 Battery Pack;

All Kits Include: Side Handle, Depth Rod,

Multi-Voltage Charger, Carrying Case

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor

M18 FUEL 1/4" Hex Impact Driver w/ ONE-KEY™ Kit

2857-22, 2857-22CT (2857-20 Tool-Only)

Specifications:

| Max Torque | 2,000 in-lbs |
|---------------------------|-----------------------|
| IPM | 0 – 4,300 |
| RPM | 0 – 3,600 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Chuck Type | 1/4" Hex |
| Single Hand Bit Insertion | Yes |
| Length / Weight | 4.6" / 3.8 lbs |

Includes: 2857-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; **2857-22CT** (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs;

All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

1/4" Hex Impact Driver Kit

| -p | |
|-----------------------------|----------------|
| Max Torque | 2,000 in-lbs |
| IPM | 0 – 4,300 |
| RPM | 0 – 3,600 |
| DRIVE CONTROL™ | 4-Mode |
| Chuck Type | 1/4" Hex |
| Single-Handed Bit Insertion | Yes |
| Length / Weight | 4.6" / 3.8 lbs |

2853-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case



Specifications:

| 1" |
|-----------------|
| 2.2 ft-lbs |
| 0 – 1,500 |
| 0 - 4,400 |
| 16.5" / 8.5 lbs |
| |

Includes: 2713-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger;

All Kits Include: Side Handle, Depth Rod, Carrying Case







M18™ 1/4" Hex Compact **Impact Driver Kit**

2656-22CT (2656-20 Tool-Only)

Specifications:

| Max Torque | 1,500 in-lbs |
|-----------------|-----------------------|
| IPM | 0 – 3,450 |
| RPM | 0 – 2,750 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 5.5" / 3.8 lbs |
| Length / Weight | 5.5" / 3.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



M18 FUEL SURGE™ 1/4" Hex **Hydraulic Driver Kit**

2760-22, 2760-22CT (2760-20 Tool-Only)

Specifications:

2851-20 Tool-Only

Max Torque

Chuck Type

DRIVE CONTROL™

Includes: Belt Clip

Length / Weight

IPM

RPM

Specifications:

| Sustained Max Torque | 450 in-lbs |
|----------------------|----------------|
| IPM | 0 – 4,000 |
| RPM | 0 – 3,000 |
| DRIVE CONTROL™ | 4-Mode |
| Length / Weight | 5.0" / 3.9 lbs |
| | |

M18™ Brushless 1/4" Hex

3-Speed Impact Driver

Includes: 2760-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; 2760-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

1.600 in-lbs

0 - 4.200

0 - 3,400

1/4" Hex

3-Mode

5.1" / 2.0 lbs



M18™ 1/4" 2-Speed **Impact Driver Kit**

2657-22, 2657-22CT (2657-20 Tool-Only)

Specifications:

| Max Torque | 1,500 in-lbs |
|-----------------|-----------------------|
| IPM | 0 – 3,450 |
| RPM | 0 – 2,750 |
| Chuck Type | 1/4" Hex Quick Change |
| Length / Weight | 5.5" / 3.8 lbs |
| | |

Includes: 2657-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; **2657-22CT** (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case



M18 FLIEL

1/4" Blind Rivet Tool w/ ONE-KEY™ Kit

2660-22CT (2660-20 Tool-Only)

| Specifications: | |
|-----------------|--|
| Rivet Sizes | 3/16" (4.8 mm), 7/32" (6.0 mm), 1/4" (6.4 mm), 9/32" (7.0 mm) |
| Rivet Material | Aluminum, Steel, Stainless Steel |
| Pull Force | 4,500 lbs |
| Length / Weight | 12.5" / 5.6 lbs |

Includes: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, (4) Retention Nose Pieces, Nose Piece Wrench, Mandrel Collector, Hanging Ring, Belt Clip, Multi-Voltage Charger, Contractor Bag

Related Accessories:

49-16-2660NR Non-Retention Nose Piece 4 pk; 49-16-2660EXT 6" Extension;

M18™ Compact Brushless 1/4" Hex Impact Driver Kit

2850-22CT (2850-20 Tool-Only)


Battery and Charger Sold Separately

Specifications:

| Specifications | J . |
|-----------------|----------------|
| Max Torque | 1,600 in-lbs |
| IPM | 0 – 4,200 |
| RPM | 0 – 3,400 |
| Chuck Type | 1/4" Hex |
| Length / Weight | 5.1" / 2.9 lbs |

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case







2866-22, 2866-22CT (2866-20 Tool-Only)

Specifications:

| - | |
|-----------------|----------------|
| RPM | 0 – 4,500 |
| Belt Clip | Yes |
| Auto Start Mode | Yes |
| Length / Weight | 9.0" / 4.1 lbs |
| | |

Includes: 2866-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; **2866-22CT** (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, PR2 Bit, Multi-Voltage Charger,

Related Accessory: 49-20-0001 MILWAUKEE® Collated Magazine

Screw Capacity: Up to 2"

Compatible with all major screw brands

Related Tool:

2627-22 M18™ Cut Out Tool Kit Pg. 50



M18™ Right Angle **Impact Driver Kit**

2667-22, 2667-21CT (2667-20 Tool-Only)

Specifications:

| = | |
|---------------------|-----------------------|
| Max Torque (2-Mode) | 350 / 675 in-lbs |
| IPM | 0 - 2,400 / 0 - 3,400 |
| RPM | 0 - 1,500 / 0 - 2,250 |
| Anvil Type | 1/4" Hex |
| Length / Weight | 14.1" / 3.9 lbs |

Includes: 2667-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; **2667-21CT** (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

1/2" Compact Impact Wrench w/ Pin Detent w/ ONE-KEY™ Kit

2759-22, 2759B-22 (2759-20, 2759B-20 Tool-Only)

Specifications:

| - | |
|--------------------|-----------------------|
| Fastening Torque | 220 ft-lbs |
| Nut-Busting Torque | 220 ft-lbs |
| IPM | 0 – 3,200 |
| RPM | 0 – 2,500 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 6.1" / 4.2 lbs |

Includes: 2759-22 1/2" Compact Impact Wrench w/ Pin Detent w/ ONE-KEY™; 2759B-22 1/2" Compact Impact Wrench w/ Friction Ring w/ ONE-KEY™

All Kits Include: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

M18 FUEL

1/2" Compact Impact Wrench w/ Friction Ring Kit

2855-22 (2855-20 Tool-Only)

Specifications:

| _ | |
|--------------------|---|
| Fastening Torque | 250 ft-lbs |
| Nut-Busting Torque | 250 ft-lbs |
| IPM | 0 – 3,500 |
| RPM | 0 – 2,400 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Length / Weight | 4.8" / 3.9 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case

M18 FUEL

1/2" Compact Impact Wrench w/ Pin Detent Kit

2855P-22 (2855P-20 Tool-Only)

Specifications:

| • | |
|--------------------|---|
| Fastening Torque | 250 ft-lbs |
| Nut-Busting Torque | 250 ft-lbs |
| IPM | 0 – 3,500 |
| RPM | 0 – 2,400 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Lenath / Weight | 4.8" / 3.9 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case

M18™ Right Angle **Impact Wrench Kit**

2668-22, 2668-21CT (2668-20 Tool-Only)

Specifications:

| Fastening Torque (2-Mode) | 30 / 60 ft-lbs |
|---------------------------|-----------------------|
| Nut-Busting Torque | 60 ft-lbs |
| IPM | 0 - 2,400 / 0 - 3,400 |
| RPM | 0 - 1,500 / 0 - 2,250 |
| Anvil Type | 3/8" |
| Length / Weight | 14.3" / 3.9 lbs |

Includes: 2668-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2668-21CT** (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

M18™ 1/2" Compact Impact Wrench Kit

2659-22 (2659-20 Tool-Only)

Specifications:

| • | |
|--------------------|-----------------|
| Fastening Torque | 183 ft-lbs |
| Nut-Busting Torque | 183 ft-lbs |
| IPM | 0 – 3,350 |
| RPM | 0 – 2,450 |
| Anvil Type | 1/2" Pin Detent |
| Lenath / Weight | 6.0" / 4.1 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



2862-22 (2862-20 Tool-Only)

Specifications:

Fastening Torque

RPM

Nut-Busting Torque

DRIVE CONTROL™

Length / Weight

M18 FUEL

1/2" High Torque Impact Wrench

750 ft-lbs

1 100 ft-lbs 0 - 2,400

0 - 1,800

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs,

4-Mode (Customizable) 8.1" / 7.2 lbs

w/ Pin Detent w/ ONE-KEY™ Kit



M18 FUEL

3/8" Impact Wrench w/ Friction Ring w/ ONE-KEY™ Kit

2758-22, 2758-22CT (2758-20 Tool-Only)

Specifications:

| Fastening Torque | 210 ft-lbs |
|--------------------|-----------------------|
| Nut-Busting Torque | 210 ft-lbs |
| IPM | 0 – 3,200 |
| RPM | 0 – 2,500 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 5.9" / 4.2 lbs |

Includes: 2758-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; 2758-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case



3/8" Compact Impact Wrench w/ Friction Ring Kit

2854-22, 2854-22CT (2854-20 Tool-Only)

Specifications:

| Fastening Torque | 250 ft-lbs |
|--------------------|---|
| Nut-Busting Torque | 250 ft-lbs |
| IPM | 0 – 3,500 |
| RPM | 0 – 2,400 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Length / Weight | 4.8" / 3.9 lbs |

Includes: 2854-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; 2854-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

M18™ 3/8" Compact **Impact Wrench Kit**

2658-22, 2658-22CT (2658-20 Tool-Only)

Specifications:

| _ | |
|--------------------|--------------------|
| Fastening Torque | 167 ft-lbs |
| Nut-Busting Torque | 167 ft-lbs |
| IPM | 0 – 3,350 |
| RPM | 0 – 2,450 |
| Anvil Type | 3/8" Friction Ring |
| Length / Weight | 6.0" / 4.1 lbs |

Includes: 2658-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2658-22CT** (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

M18 FLIEL

1/2" Mid-Torque Impact Wrench w/ Pin Detent Kit

2962P-22 (2962P-20 Tool-Only)

Specifications:

| оросиновионо. | |
|--------------------|---|
| Fastening Torque | 650 ft-lbs |
| Nut-Busting Torque | 550 ft-lbs |
| IPM | 0 – 3,500 |
| RPM | 0 – 2,400 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Length / Weight | 4.8" / 3.9 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



1/2" Mid-Torque Impact Wrench w/ Friction Ring Kit

2962-22 (2962-20 Tool-Only)

Specifications:

| Fastening Torque | 650 ft-lbs |
|--------------------|---|
| Nut-Busting Torque | 550 ft-lbs |
| IPM | 0 – 3,100 |
| RPM | 0 – 2,575 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Length / Weight | 6.0" / 5.1 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



3/8" Mid-Torque Impact Wrench w/ Friction Ring Kit

2960-22, 2960-22CT (2960-20 Tool-Only)

Specifications:

| Fastening Torque | 600 ft-lbs |
|--------------------|---|
| Nut-Busting Torque | 550 ft-lbs |
| IPM | 0 – 3,100 |
| RPM | 0 – 2,575 |
| DRIVE CONTROL™ | 4-Mode w/ Auto Shut-Off Mode & Bolt Removal Mode |
| Length / Weight | 6.0" / 5.0 lbs |

Includes: 2960-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; 2960-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

M18 FLEL


1" D-Handle High Torque Impact Wrench w/ ONE-KEY™ Kit

2868-22HD (2868-20 Tool-Only)

Specifications:

| Fastening Torque | 1,900 ft-lbs |
|--------------------|-----------------------|
| Nut-Busting Torque | 2,000 ft-lbs |
| IPM | 0 – 1,440 |
| RPM | 0 – 1,200 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 17.94" / 21 lbs |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Tool-Free Adjustable Handle, Lanyard Loop, Rapid Charger,





Wrench w/ ONE-KEY™ Kit

2867-22 (2867-20 Tool-Only)

| Fastening Torque | 1,500 ft-lbs |
|--------------------|--------------------------|
| Nut-Busting Torque | 1,800 ft-lbs |
| IPM | 0 – 2,450 |
| RPM | 0 - 1,650 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 10.9" / 12.9 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs, Tool-Free Adjustable Handle, Lanyard Loop,



3/4" High Torque Impact **Wrench w/ Friction Ring** w/ ONE-KEY™ Kit

2864-22 (2864-20 Tool-Only)

Specifications:

| Fastening Torque | 1,200 ft-lbs |
|--------------------|-----------------------|
| Nut-Busting Torque | 1,600 ft-lbs |
| IPM | 0 – 1,850 |
| RPM | 0 – 1,850 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 8.6" / 7.9 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case

M18™ 3/4" High Torque Impact **Wrench w/ Friction Ring Kit**

2664-22 (2664-20 Tool-Only)

Specifications:

| Fastening Torque | 525 ft-lbs |
|------------------|----------------|
| Breakaway Torque | 700 ft-lbs |
| IPM | 0 – 2,200 |
| RPM | 0 – 1,900 |
| Length / Weight | 9.0" / 6.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case

1" High Torque Impact

Specifications:

| Fastening Torque | 1,500 ft-lbs |
|--------------------|--------------------------|
| Nut-Busting Torque | 1,800 ft-lbs |
| IPM | 0 - 2,450 |
| RPM | 0 - 1,650 |
| DRIVE CONTROL™ | 4-Mode (Customizable) |
| Length / Weight | 10.9" / 12.9 lbs |

Rapid Charger, Contractor Bag



1/2" High Torque Impact Wrench w/ Pin Detent Kit

Multi-Voltage Charger, Carrying Case

2766-22 (2766-20 Tool-Only)

Specifications:

| Fastening Torque | 750 ft-lbs |
|--------------------|-----------------------------|
| Nut-Busting Torque | 1,100 ft-lbs |
| IPM | 0 – 2,400 |
| RPM | 0 – 1,850 |
| DRIVE CONTROL™ | 4-Mode w/ Bolt Removal Mode |
| Length / Weight | 8.1" / 7.1 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18™ 1/2" High Torque Impact Wrench w/ Pin Detent Kit

2662-22 (2662-20 Tool-Only)

Specifications:

| Fastening Torque | 450 ft-lbs |
|------------------|----------------|
| Breakaway Torque | 640 ft-lbs |
| IPM | 0 – 2,200 |
| RPM | 0 – 1,900 |
| Length / Weight | 8.9" / 6.7 lbs |

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case



1/2" Ext. Anvil Controlled Torque

| | • | |
|---|--------------------|-----------------------|
| | Fastening Torque | 750 ft-lbs |
| | Nut-Busting Torque | 1,100 ft-lbs |
| | IPM | 0 – 2,400 |
|) | RPM | 0 – 1,800 |
|) | DRIVE CONTROL™ | 4-Mode (Customizable) |
| | Anvil Type | 1/2" Friction Ring |
| | Length / Weight | 10.1" / 5.8 lbs |
| | | |

Multi-Voltage Charger, Contractor Bag



1/2" High Torque Impact Wrench w/ Friction Ring w/ ONE-KEY™ Kit

2863-22 (2863-20 Tool-Only)

Specifications:

| 1,000 ft-lbs |
|-----------------------|
| 1,400 ft-lbs |
| 0 – 2,100 |
| 0 – 1,750 |
| 4-Mode (Customizable) |
| 8.4" / 7.6 lbs |
| |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case



Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs,



M18 FUEL

1/2" High Torque Impact Wrench w/ Friction Ring Kit

2767-22 (2767-20 Tool-Only)

Specifications:

| Fastening Torque | 1,000 ft-lbs |
|--------------------|-----------------------------|
| Nut-Busting Torque | 1,400 ft-lbs |
| IPM | 0 – 2,100 |
| RPM | 0 – 1,750 |
| DRIVE CONTROL™ | 4-Mode w/ Bolt Removal Mode |
| Length / Weight | 8.4" / 7.5 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case




2663-22 (2663-20 Tool-Only)

Specifications:

| Fastening Torque | 450 ft-lbs |
|------------------|----------------|
| Breakaway Torque | 640 ft-lbs |
| IPM | 0 – 2,200 |
| RPM | 0 – 1,900 |
| Length / Weight | 8.9" / 6.7 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case



SUPER SAWZALL® Reciprocating Saw Kit

2722-21HD (2722-20 Tool-Only)

Specifications:

| SPM | 0 – 3,000 | REDLI |
|----------------|------------------------------------|-----------|
| Stroke Length | 1-1/4" | HIGH OUTF |
| Blade Clamp | QUIK-LOK™ (Accepts all SAWZALL® | ® Blades) |
| Speeds | 5-Speeds | |
| Orbital Action | Selectable; On/Off | |
| Anti-Vibration | Yes | |
| Weight | 12.2 lbs | |
| | | |

Battery Pack, Blade, Rapid Charger, Contractor Bag



M18 FUEL 7/16" Hex Utility **High Torque Impact Wrench** w/ ONE-KEY™ Kit

2865-22 (2865-20 Tool-Only)

Specifications:

| Opcomoduons. | |
|---------------------|---------------------------------------|
| Max Torque | 750 ft-lbs |
| IPM | 0 – 2,800 |
| RPM | 0 – 2,200 |
| Bit Insertion | QUIK-LOK™ Single-Handed Bit Insertion |
| DRIVE CONTROL™ | 4 Modes (Customizable) |
| High Voltage Rating | 69kV |
| Lanath /\Maiaht | 0.011 / 7.4 II |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Lanyard Loop, 12V Inverter, Multi-Voltage Charger, Contractor Bag



Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0

M18 FUEL

SAWZALL® Reciprocating Saw Kit w/ ONE-KEY"

2822-22 (2822-20 Tool-Only)

Specifications:

| Cut Brake Setting | Yes |
|-------------------|-----------------|
| Stroke Length | 1-1/4" |
| SPM | 0 – 3,000 |
| Adjustable Shoe | Yes |
| Hang Hook | Yes |
| Length / Weight | 17.1" / 6.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18 FUEL SAWZALL® **Reciprocating Saw Kit**

2821-22, 2821-21 (2821-20 Tool-Only)

Specifications:

| | _ |
|-----------------|-----------------|
| Stroke Length | 1-1/4" |
| SPM | 0 – 3,000 |
| Adjustable Shoe | Yes |
| Hang Hook | Yes |
| Length / Weight | 17.1" / 6.8 lbs |
| | |

Includes: 2821-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; **2821-21** (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack;

All Kits Include: Multi-Voltage Charger, Carrying Case

M18™ SAWZALL® Reciprocating Saw Kit M18 FLEL

2621-22, 2621-21 (2621-20 Tool-Only)



Includes: 2621-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; 2621-21 (1) M18™ REDLITHIUM™ XC3.0 Battery Pack;

All Kits Include: Blade, Multi-Voltage Charger, Carrying Case

7-1/4" Circular Saw Kit

2732-21HD (2732-20 Tool-Only) Specifications:

RPM **Bevel Capacity** 50° 2-1/2" at 90°; 1-7/8 " at 45° **Cut Capacity** Arbor 5/8" Blade Guards Magnesium Weight 12.0 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Circular Saw Blade, Wrench, Rapid Charger, Contractor Bag

M18 FLEL

HACKZALL® One-Handed **Reciprocating Saw Kit**

2719-21 (2719-20 Tool-Only)

Specifications:

| SPM | 3,000 |
|---------------|--|
| Stroke Length | 7/8" |
| Blade Clamp | QUIK-LOK™ (Accepts all SAWZALL® Blades) |
| Weight | 5.6 lbs |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Blade, Multi-Voltage Charger, Contractor Bag

7-1/4" Rear Handle **Circular Saw Kit**

2830-21HD (2830-20 Tool-Only)

Specifications:

| - 1 | RPM | 5,800 |
|-----|----------------|-------------------------------|
| | Bevel Capacity | 53° |
| (| Cut Capacity | 2-1/2" at 90°; 1-7/8 " at 45° |
| | Arbor | Diamond |
| | Blade Guards | Magnesium |
| ١ | Weight | 10.0 lbs |

Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] HD12.0 Battery Pack, Circular Saw Blade, Wrench, Rapid Charger, Contractor Bag

M18™ Brushless 7-1/4" Circular Saw Kit

2631-21 (2631-20 Tool-Only)

Specifications:

| RPM | 5,000 |
|----------------|------------------------------|
| Bevel Capacity | 50° |
| Cut Capacity | 2-1/2" at 90°; 1-7/8" at 45° |
| Arbor | 5/8" |
| Blade Guards | Magnesium |
| Weight | 8.8 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Circular Saw Blade, Wrench, Multi-Voltage Charger, Contractor Bag

M18™ HACKZALL® One-Handed **Reciprocating Saw Kit**

2625-21, 2625-21CT (2625-20 Tool-Only)

Specifications:

| SPM | 0 – 3,000 | |
|----------------|--|--|
| Stroke Length | 3/4" | |
| Blade Clamp | QUIK-LOK™ (Accepts all SAWZALL® Blades) | |
| Anti-Vibration | Yes | |
| Weight | 5.6 lbs | |

Includes: 2625-21 (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack; **2625-21CT** (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: Blade, Multi-Voltage Charger, Contractor Bag

6-1/2" Circular Saw Kit

2730-22, 2730-21 (2730-20 Tool-Only)

Specifications:

| | | - 48 |
|----------------|-------------------------------|------|
| RPM | 5,000 | |
| Bevel Capacity | 50° | |
| Cut Capacity | 2-3/16" at 90°; 1-5/8" at 45° | |
| Arbor | 5/8" | |
| Blade Guards | Magnesium | |
| Weight | 8.0 lbs | |

Includes: 2730-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; **2730-21** (1) M18™ REDLITHIUM™ XC5.0 Battery Pack; All Kits Include: Circular Saw Blade, Wrench, Multi-Voltage

Charger, Contractor Bag





M18™ 6-1/2" **Circular Saw Kit**

2630-22 (2630-20 Tool-Only) **Specifications:**

| RPM | 3,500 |
|----------------|-------------------------------|
| Bevel Capacity | 50° |
| Cut Capacity | 2-1/8" at 90°; 1-9/16" at 45° |
| Arbor | 5/8" |
| Blade Guards | Plastic |
| Weight | 8.5 lbs |
| | |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Circular Saw Blade, Rip Fence, Wrench, Multi-Voltage Charger, Contractor Bag

M18™ Random Orbit Sander Kit

2648-21 (2648-20 Tool-Only)

Specifications:

| OPM | 12,000 | |
|----------------|--------------------|--|
| Variable Speed | 7,000 - 12,000 OPM | |
| Pad Size | 5.0" | |
| Orbit Diameter | 3/32" | |
| Weight | 2.7 lbs | |

Includes: (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, (2) Pieces of 80 Grit Sandpaper, Universal Hose Adapter, Universal Hook & Loop Pad, Multi-Voltage Charger, Contractor Bag

M18™ 3-1/4" Planer Kit

2623-21 (2623-20 Tool-Only)

Specifications:

| RPM | 14,000 |
|-------------------|-----------------|
| Planing Width | 3-1/4" |
| Max Planing Depth | 5/64" |
| Rabbet Depth | 27/64" |
| Length / Weight | 12.4" / 7.8 lbs |

Includes: (1) M18™ REDLITHIUM™ XC3.0 Battery Pack. Bevel Edge Guide, (2) Double-Edged Carbide Blades, Multi-Voltage Charger, Contractor Bag

M18 FUEL **Compact Router** 2723-20 Tool-Only

Specifications:

| - | |
|------------------|-----------------|
| RPM | 10,000 - 31,000 |
| Speeds | 6 |
| Collet Size | 1/4" |
| Adjustable Range | 1.5" |
| Height / Weight | 6.9" / 3.0 lbs |

Battery and Charger Sold Separately

Includes: Fixed Base, Straight Edge Guide, 5-3/4" Template Bushing Sub-base plate, Dust Shroud, 11/16" Collet Wrench, 7/16" Spindle Wrench **Related Accessories:**

48-10-5601 Compact Router Plunge Base;

48-10-5602 Compact Router Offset Base



| Specifications: | | |
|-----------------|------------------|-----------------------------------|
| | SPM | 3,500 |
| | Stroke Length | 1" |
| | Bevel Capacity | 45° |
| | Blade Clamp | Lever-Action QUIK-LOK™ T-Shank |
| | Orbital Settings | 4 |
| | Weight | 6.4 lbs |

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Jig Saw Blade, Dust Collection Tube, Shoe Guard, Anti-Splinter Guard, Dust Cover, Wrench, Multi-Voltage Charger, Carrying Case



Barrel Grip Jig Saw

2737B-20 Tool-Only

Specifications:

| SPM | 3,500 |
|------------------|-----------------------------------|
| Stroke Length | 1" |
| Bevel Capacity | 45° |
| Blade Clamp | Lever-Action QUIK-LOK™ T-Shank |
| Orbital Settings | 4 |
| Weight | 4.6 lbs |

Battery and Charger Sold Separately

Includes: Jig Saw Blade, Dust Collection Tube, Shoe Guard, Anti-Splinter Guard, Dust Cover, LED Cover, Wrench





M18 FUEL **Oscillating Multi-Tool Kit**

2836-21 (2836-20 Tool-Only)

Specifications:

| Speed Settings | 12 |
|-------------------|-----------------|
| OPM | 10,000 - 20,000 |
| Oscillation Angle | 4.2° |
| Auto-Load Feature | Yes |
| LED Light | Yes |
| Length / Weight | 14.5" / 4.2 lbs |

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, (5) Sanding Sheets, Sanding Pad, Wood Cutting Blade, Charger, Contractor Bag



M18™ 10 oz Caulk and **Adhesive Gun Kit**

2641-21CT (2641-20 Tool-Only) Specifications:

| specifications. | |
|------------------------|---------|
| Force | 950 lbs |
| Inches Per Minute | 0 – 21 |
| Speed Settings | 6 |
| Auto-Reverse Anti-Drip | Yes |
| Weight | 5.8 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack. 10 oz Carriage, M18™ 10 oz Plunger Rod and Piston Ássembly, Multi-Voltage Charger

M18™ 20 oz Aluminum Barrel Sausage Style Caulk & Adhesive Gun Kit

2642-21CT

Specifications:

| | - | |
|--|------------------------|---------|
| | Force | 950 lbs |
| | Inches Per Minute | 0 – 21 |
| | Speed Settings | 6 |
| | Auto-Reverse Anti-Drip | Yes |
| | Weight | 6.5 lbs |
| | | |

Includes: (1) M18™ REDLITHIUM™ CP1.5 Battery Pack, 20 oz Aluminum Sausage Style Barrel, M18™ 20 oz Plunger Rod and Piston Assembly, Nozzle, Multi-Voltage Charger

M18™ Multi-Tool Kit

2626-22 (2626-20 Tool-Only)

Specifications:

| Speed Settings | 12 |
|----------------------------|-----------------|
| OPM | 11,000 – 18,000 |
| Universal Adapter | Yes |
| Tool-Free Accessory Change | Yes |
| Length / Weight | 14.0" / 4.2 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs. Wood Cutting Blade, Sanding Pad, (5) Assorted Sanding Sheets, Multi-Voltage Charger, Contractor Bag

M18™ 20 oz Clear Barrel Sausage Style Caulk & Adhesive Gun Kit

2643-21CT

Specifications:

| Force | 950 lbs |
|------------------------|---------|
| Inches Per Minute | 0 – 21 |
| Speed Settings | 6 |
| Auto-Reverse Anti-Drip | Yes |
| Weight | 6.6 lbs |

Includes: (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack, 20 oz Clear Sausage Style Barrel, M18™ 20 oz Plunger Rod and Piston Assembly, Nozzle, Multi-Voltage Charger

M18™ Cut Out Tool Kit

2627-22, 2627-22CT (2627-20 Tool-Only)

Specifications:

| = | |
|----------------------------|----------------|
| RPM | 28,000 |
| Tool-Free Depth Adjustment | Yes |
| LED Light | Yes |
| Belt Clip | Yes |
| Length / Weight | 8.9" / 1.8 lbs |
| | |

Includes: 2627-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2627-22CT** (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs; All Kits Include: Belt Clip, (2) 1/8" Drywall Bits, 1/8" Collet, Collet, Wrench, Multi-Voltage Charger, Contractor Bag **Related Tool:**

2866-22 M18 FUEL™ Drywall Screw Gun Kit Pg. 44

Caulk Gun Accessories

Compatible with 2641-21CT, 2642-21CT, and 2643-21CT

31-12-0700 Caulk Gun Nozzle - Black:

48-08-1076 M18™ 10 oz Caulk and Adhesive Gun Conversion Kit;

48-08-1091 20 oz Aluminum Barrel Kit;


48-08-1093 M18[™] 20 oz Aluminum Barrel Sausage Style Caulk


and Adhesive Gun Conversion Kit; **48-08-1094** M18[™] 20 oz Clear Barrel Sausage Style Caulk

and Adhesive Gun Conversion Kit;

48-08-1095 M18™ Quart Caulk and Adhesive Gun Conversion Kit;

48-08-1096 20 oz Clear Barrel Kit



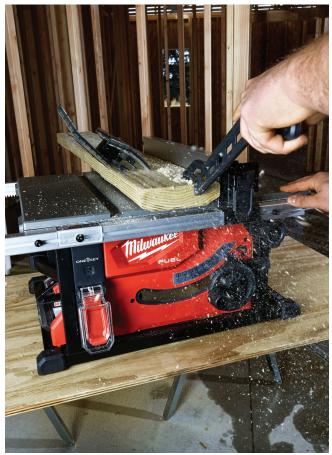

M18 FUEL

10" Dual Bevel Sliding **Compound Miter Saw Kit**

2734-21 (2734-20 Tool-Only) Specifications:

| Blade Size | 10" |
|-------------------------|-----------|
| No Load RPM | 4,000 |
| Max Bevel Angle | 48° / 48° |
| Max Miter Angle | 50° / 60° |
| Max Vertical Capacity | 5-3/4" |
| Max Horizontal Capacity | 2x12 |
| Weight | 47.0 lbs |
| | |



Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Pack, Blade Wrench, Carbide Tipped Blade, Clamp, Dust Bag, Rapid Charger

M18 FUEL

7-1/4" Dual Bevel Sliding **Compound Miter Saw Kit** 2733-21 (2733-20 Tool-Only)

Specifications:

| Blade Size | 7-1/4" |
|-------------------------|-----------|
| No Load RPM | 5,000 |
| Max Bevel Angle | 48° / 48° |
| Max Miter Angle | 48° / 48° |
| Max Vertical Capacity | 3-1/2" |
| Max Horizontal Capacity | 2x8 |



Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Blade Wrench, Blade, Clamp, Multi-Voltage Charger

28.0 lbs

M18 FUEL 8-1/4" Table Saw w/ ONE-KEY™ Kit

2736-21HD (2736-20 Tool-Only) Specifications:

| RPM | 6,300 | |
|--------------|-----------------|------------------------|
| Blade Size | 8-1/4" | |
| Arbor Size | 5/8" | REDLITHIUM |
| Max Bevel | 47° | HIGH OUTPUT HD120 |
| Cut Depth | 2-1/2" at 90°; | 1-3/4" at 45° |
| Rip Capacity | 24" Left of Bla | de; 12" Right of Blade |
| Weight | 45.0 lbs | |

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Blade, Wrench, Anti-Kickback Pawls, Guard. Riving Knife, Fence, Push Stick, Miter Gauge, Rapid Charger

M18 FUEL

12" Dual Bevel Sliding Compound Miter Saw w/ ONE-KEY™ Kit

2739-21HD (2739-20 Tool-Only)

Specifications:

| Specifications. | |
|-------------------------|-----------|
| Blade Size | 12" |
| No Load RPM | 3,500 |
| Max Bevel Angle | 48° / 48° |
| Max Miter Angle | 50° / 60° |
| Max Vertical Capacity | 6-3/4" |
| Max Horizontal Capacity | 2x14 |
| Weight | 47.6 lbs |



Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Blade, Clamp, Handles, Rapid Charger

21° Framing Nailer Kit 2744-21 (2744-20 Tool-Only) Specifications:

| - | |
|-----------------|---------------------------------|
| Collation Angle | 21° Round Head Nail |
| Nail Size | 2" - 3-1/2" |
| Nail Collation | 20° – 22° |
| Magazine Size | 45 Nails |
| Max Fire Rate | 3 Nails per Second |
| Firing Modes | Sequential or Contact Actuation |

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Rafter Hook, Hex Key, Multi-Voltage Charger, Contractor Bag **Related Accessory:**

48-08-2744 21° Framing Nailer Extended Capacity Magazine





18 Gauge Brad Nailer Kit

2746-21CT (2746-20 Tool-Only)

Specifications:

| opoonioanono. | |
|------------------|------------------------------------|
| Nail Diameter | 18 Gauge |
| Nail Size | 5/8" - 2-1/8" |
| Magazine Size | 110 Nails |
| Max Fire Rate | 3 Nails per Second |
| Magazine Loading | Side Load |
| Firing Modes | Sequential or Contact Actuation |
| | |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Reversible Belt Hook, Multi-Voltage Charger, Contractor Bag



30° Framing Nailer Kit

2745-21 (2745-20 Tool-Only)

Specifications:

| Collation Angle | 30° Clipped or Full Head Nail |
|-----------------|---------------------------------|
| Nail Size | 2" - 3-1/2" |
| Nail Collation | 30° – 34° |
| Magazine Size | 57 Nails |
| Max Fire Rate | 3 Nails per Second |
| Firing Modes | Sequential or Contact Actuation |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Rafter Hook, Hex Key, Multi-Voltage Charger, Contractor Bag Related Accessory:

48-08-2745 30° Framing Nailer Extended Capacity Magazine



M18 FUEL 18 Gauge 1/4" Narrow Crown Stapler Kit

2749-21CT (2749-20 Tool-Only) **Specifications:**

| Staple Diameter | 18 Gauge |
|-------------------|----------------------|
| Staple Crown Size | 1/4" |
| Staple Length | 3/8" - 1-1/2" |
| Magazine Size | 108 Staples |
| Max Fire Rate | 4 Staples per Second |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Reversible Belt Hook, Multi-Voltage Charger, Contractor Bag

Front Load



M18 FUEL 16 Gauge Straight Finish Nailer Kit 2741-21CT (2741-20 Tool-Only)

Magazine Loading

Specifications:

Length / Weight

| - | |
|----------------------|--------------------|
| Nail Diameter | 16 Gauge |
| Nail Size | 3/4" - 2-1/2" |
| Nail Collation Angle | 0° |
| Magazine Size | 110 Nails |
| Max Fire Rate | 3 Nails per Second |
| Magazine Loading | Bottom Load |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag

11.9" / 7.2 lbs









16 Gauge Angled Finish Nailer Kit

2742-21CT (2742-20 Tool-Only)

Specifications:

| Nail Diameter | 16 Gauge |
|----------------------|--------------------|
| Nail Size | 1-1/4" - 2-1/2" |
| Nail Collation Angle | 20° |
| Magazine Size | 110 Nails |
| Max Fire Rate | 3 Nails per Second |
| Magazine Loading | Bottom Load |
| Length / Weight | 11.9" / 7.2 lbs |
| | |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag




9" Cut-Off Saw w/ ONE-KEY™ Kit

2786-22HD (2786-20 Tool-Only) Specifications:

| RPM | 6,600 | |
|----------------------|----------|------------|
| Blade Size | 9" | REDLIT |
| Arbor Size | 7/8" | HIGH OUTPU |
| Cut Depth | 3.4" | |
| Load Indicator Light | Yes | |
| Blade Brake | RAPIDSTO | P™ |
| Weight | 10.6 lbs | |

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] HD12.0 Battery Packs, Abrasive Blade, Diamond Blade, Wrench, Hex Key, Rapid Charger



M18 FLEL

15 Gauge Finish Nailer Kit

2743-21CT (2743-20 Tool-Only)

Specifications:

| Nail Diameter | 15 Gauge |
|----------------------|--------------------|
| Nail Size | 1-1/4" - 2-1/2" |
| Nail Collation Angle | 34° |
| Magazine Size | 110 Nails |
| Max Fire Rate | 3 Nails per Second |
| Magazine Loading | Bottom Load |
| Length / Weight | 11.9" / 7.2 lbs |

Includes: (1) M18[™] REDLITHIUM[™] CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag



M18™ SWITCH TANK™ 4-Gallon **Backpack Water Supply Kit**

2820-21WS

Specifications:

| Tank Capacity | 4-Gallon |
|-----------------|-----------------------|
| Pump Type | Dual Diaphragm Pump |
| PSI Range | 20 - 60 PSI (5 Modes) |
| Flow Rate Range | 0.16 - 1.13 Gal/Min |
| Dry Weight | 18.5 lbs |

Includes: M18™ SWITCH TANK™ Powered Base, SWITCH TANK™ 4-Gallon Water Supply Tank Assembly, (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, 10' Hose w/ Quick-Connect, Water Spray Nozzle, Multi-Voltage Charger



M18™ SWITCH TANK™ 4-Gallon **Backpack Concrete Sprayer Kit**

| Tank Capacity | 4-Gallon |
|-----------------|------------------------|
| Pump Type | Dual Diaphragm Pump |
| PSI Range | 20 - 120 PSI (5 Modes) |
| Spray Distance | Up to 25' |
| Flow Rate Range | 0.14 - 0.82 Gal/Min |
| Dry Weight | 18.3 lbs |

Includes: M18™ SWITCH TANK™ Powered Base, SWITCH TANK™ 4-Gallon Concrete Sprayer Tank Assembly, (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack, Adjustable Nozzle, Fan Nozzle, Multi-Voltage Charger



M18 FUEL

2 Gallon Compact Quiet Compressor

2840-20 Tool-Only

| Specifications: | | |
|------------------------|-----------------------|---|
| SCFM | 1.2 @ 90 PSI | 4 |
| Capacity | 2 Gallon | |
| Sound Level | 68 dB(a) | 1 |
| Dimensions (L x W x H) | 16.3" / 18.5" / 10.3" | |
| Weight | 31.2 lbs | |
| Regulator | Single Turn | |
| Pump Type | Oil Free | |

Battery and Charger Sold Separately

2820-21CS

Specifications:

| Tank Capacity | 4-Gallon |
|-----------------|------------------------|
| Pump Type | Dual Diaphragm Pump |
| PSI Range | 20 - 120 PSI (5 Modes) |
| Spray Distance | Up to 25' |
| Flow Rate Range | 0.14 - 0.82 Gal/Min |
| Dry Weight | 18.3 lbs |

SWITCH TANK™ Accessories

Compatible with 2820-20

Related Accessories:

49-16-28WS SWITCH TANK™ 4-Gallon Water Supply Tank Assembly; 49-16-28CS SWITCH TANK™ 4-Gallon Concrete Sprayer Tank Assembly; 49-16-28PS SWITCH TANK™ 4-Gallon Sprayer Tank Assembly



Specifications:



2729-21 (1) M18™ REDLITHIUM™ XC5.0 Battery Pack;

All Kits Include: Blade, Multi-Voltage Charger, Carrying Case



Deep Cut Band Saw Kit

2729-22, 2729-21 (2729-20 Tool-Only)

Includes: 2729-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs;



Compact Dual-Trigger Band Saw Kit

2829S-22

Specifications:

| opcomoations. | • |
|---------------------|-------------------|
| SFPM | 0 – 540 |
| Cut Capacity | 3-1/4" x 3-1/4" |
| Shoe | Tool-Free Locking |
| LED Light | Yes |
| Hang Hook | Yes |
| Dual-Trigger Design | Yes |
| Weight | 7.7 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Packs, Set of Band Saw Blade Covers, Blade, Rapid Charger, Contractor Bag



Deep Cut Band Saw Accessory:

Compatible with 2729-20, 2729S-22

49-90-2729 Deep Cut Band Saw Blade Covers

Compact Band Saw Accessories:

Compatible with 2829-20, 2829S-20

49-90-2829 Compact Band Saw Blade Covers; 49-90-2029 Compact Band Saw Reamer Attachment



2729S-22 (2729S-20 Tool-Only)

Specifications:

| SFPM | 0 – 380 |
|---------------------|-------------------|
| Cut Capacity | 5" x 5" |
| Shoe | Tool-Free Locking |
| LED Light | Yes |
| Hang Hook | Yes |
| Dual-Trigger Design | Yes |
| Weight | 13.8 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Set of Band Saw Blade Covers, Blade, Multi-Voltage Charger, Contractor Bag

Compact Band Saw Kit

2829-22 (2829-20 Tool-Only)

Specifications:

| SFPM | 0 – 540 |
|---------------------|-------------------|
| Cut Capacity | 3-1/4" x 3-1/4" |
| Shoe | Tool-Free Locking |
| LED Light | Yes |
| Hang Hook | Yes |
| Dual-Trigger Design | No |
| Weight | 7.7 lbs |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Packs, Blade, Rapid Charger, Contractor Bag



Metal Cutting Circular Saw Kit

2782-22 (2782-20 Tool-Only)

Specifications:

| RPM | 3,900 |
|-----------------|-----------------|
| Blade Size | 5-3/8" - 5-7/8" |
| Arbor Size | 20 mm |
| Hang Hook | Yes |
| Length / Weight | 4.7" / 6.5 lbs |
| | |

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, 30T Blade, Multi-Voltage Charger, Contractor Bag

M18 FUEL

8" Metal Cutting Circular Saw Kit

2982-21 (2982-20 Tool-Only)

Specifications:

| • | |
|-----------------------------|------------------|
| Blade Cut Capacity | 2-9/16" |
| RPM | 4,000 |
| Arbor Size | 5/8" |
| Chip Collection | Yes |
| Overload Indicator Light | Yes |
| Electric Blade Brake | Yes |
| Length / Weight | 15.5" / 12.1 lbs |



Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Blade, Allen Key, Rapid Charger, Contractor Bag

M18 FUEL

14" Abrasive Chop Saw Kit

2990-21HD (2990-20 Tool-Only)

Specifications:

| -p | |
|----------------------------|-----------------------|
| RPM | 4,000 |
| RAPID STOP™ Blade Brake | Yes |
| Tool-Free Blade Adjust | Yes |
| Tool-Free Fence Adjust | Yes |
| Cut Capacity | 5" |
| Dimensions (L x W x H) | 20.2" / 11.5" / 16.5" |
| Weight | 38.1 lbs |
| | |



Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Rapid Charger

7" / 9" Large Angle Grinder Kit

2785-22HD, 2785-21HD (2785-20 Tool-Only)

Specifications:

| RPM | 6,600 |
|---|---------------------|
| Switch Type | Dual-action Trigger |
| Overload Protection | Yes |
| Electronic Clutch | Yes |
| Tool-Free Accessory Change and Guard | Yes |
| Length / Weight | 18.5" / 11.9 lbs |

Includes: 2785-22HD (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs; 2785-21HD (1) M18™ REDLITHIUM™

HIGH OUTPUT™ HD12.0 Battery Pack;

All Kits Include: 9" T27 Guard, Anti-Vibration Side Handle, Back Flange, Dust Vent Clip, FIXTEC™ Nut, Spanner Wrench, Rapid Charger, Carrying Case




4-1/2" - 6" Braking Grinder Kit Paddle Switch, No-Lock

| Specifications: | |
|---|-----------------|
| RPM | 9,000 |
| Switch Type | Paddle, No-Lock |
| Brake | Yes |
| Overload Protection | Yes |
| Electronic Clutch | Yes |
| Tool-Free Accessory Change and Guard | Yes |
| Length / Weight | 15.0" / 5.3 lbs |



Includes: T27 Guard, Side Handle, Back Flange, FIXTEC™ Nut, Wrench; 2980-22 (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs; **2980-21** (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC6.0 Battery Pack; All Kits Include: Rapid Charger, Contractor Bag

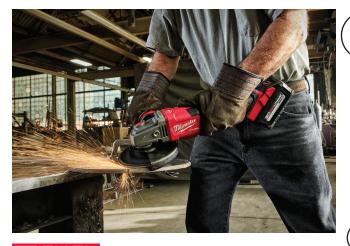

4-1/2" - 6" Braking Grinder Kit Slide Switch, Lock-On

2981-22, 2981-21 (2981-20 Tool-Only)

Specifications:

| | RPM | 9,000 |
|--|---|-----------------|
| | Switch Type | Slide, Lock-On |
| | Brake | Yes |
| | Overload Protection | Yes |
| | Electronic Clutch | Yes |
| | Tool-Free Accessory Change and Guard | Yes |
| | Length / Weight | 15.0" / 5.3 lbs |

Includes: T27 Guard, Side Handle, Back Flange, FIXTEC™ Nut, Wrench; 2981-22 (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs;

2981-21 (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Pack;

All Kits Include: Rapid Charger, Contractor Bag



4-1/2" / 5" Grinder Kit **Paddle Switch, No-Lock**

2780-22, 2780-21 (2780-20 Tool-Only)

Specifications:

| RPM | 8,500 |
|---|-----------------|
| Switch Type | Paddle, No-Lock |
| Power to Grind | Yes |
| Overload Protection | Yes |
| Electronic Clutch | Yes |
| Tool-Free Accessory Change and Guard | Yes |
| Length / Weight | 15.0" / 8.2 lbs |





2781-22, 2781-21 (2781-20 Tool-Only)

Specifications:

| оросинононо | |
|---|-----------------|
| RPM | 8,500 |
| Switch Type | Slide, Lock-On |
| Power to Grind | Yes |
| Overload Protection | Yes |
| Electronic Clutch | Yes |
| Tool-Free Accessory Change and Guard | Yes |
| Length / Weight | 15.0" / 8.2 lbs |
| | |

Includes: 2781-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; 2781-21 (1) M18™ REDLITHIUM™ XC5.0 Battery Pack; All Kits Include: Multi-Voltage Charger, Carrying Case



4-1/2" / 5" Braking **Grinder Kit**

2783-22 (2783-20 Tool-Only)

Specifications:

| RPM | 8,500 |
|---|-----------------|
| Switch Type | Paddle, No-Lock |
| Brake | Yes |
| Clutch | Yes |
| Overload Protection | Yes |
| Tool-Free Accessory Change and Guard | Yes |
| Length / Weight | 15.3" / 8.2 lbs |

Includes: T27 Guard, T1 Guard, Side Handle, Flange Nut, FIXTEC™ Nut; 2783-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger, Contractor Bag



M18™ 4-1/2" **Cut-Off / Grinder Kit**

2680-22 (2680-20 Tool-Only)

Specifications:

| RPM | 9,000 |
|---------------------|-----------|
| Switch | Paddle |
| Guard Adjustment | Tool-Free |
| Overload Protection | Yes |
| Weight | 5.9 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Type 1 Guard, Type 27 Guard, Spanner Wrench, Side Handle, Multi-Voltage Charger, Contractor Bag



M18 FUEL 1/4" Die Grinder Kit

2784-22 (2784-20 Tool-Only)

Specifications:

| • | |
|-----------------|-----------------|
| Collet Size | 1/4" |
| RPM | 20,000 |
| Switch Type | Slide, Lock-On |
| Length / Weight | 18.0" / 4.6 lbs |

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs. 11/16" Wrench, 1/2" Wrench, Multi-Voltage Charger, Carrying Case



M18™ Compact Heat Gun Kit

2688-21 (2688-20 Tool-Only)

Specifications:

| Temperature | 750°F |
|-----------------|----------------|
| Guarded Nozzle | Yes |
| Ladder Hook | Yes |
| Length / Weight | 6.4" / 3.3 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, 3/8" Concentrator Nozzle, Hook Nozzle, Multi-Voltage Charger, Carrying Case



M18[™] **18** Gauge **Double Cut Shear Kit** 2635-22 (2635-20 Tool-Only)

Specifications:

| specifications: | |
|---------------------------------|---------------------|
| Head | 18 Gauge Double Cut |
| 360° Tool-Free Rotating Head | Yes |
| Variable Speed Trigger | Yes |
| Length / Weight | 17.3" / 5.6 lbs |
| | |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag



M18[™] 14 Gauge Double Cut Shear Kit

2636-22 (2636-20 Tool-Only)

Specifications:

| Head | 14 Gauge Double Cut |
|---------------------------------|---------------------|
| 360° Tool-Free Rotating Head | Yes |
| Variable Speed Trigger | Yes |
| Length / Weight | 17.3" / 6.2 lbs |

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag



| Head | 18 Gauge Single Cut |
|---------------------------------|---------------------|
| 360° Tool-Free Rotating Head | Yes |
| Variable Speed Trigger | Yes |
| Length / Weight | 18.0" / 5.8 lbs |

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag






2738-22, 2738-21 (2738-20 Tool-Only)

Specifications:

| Capacity | 7" Maximum |
|---------------------------------|-----------------|
| RPM | 0 – 2,200 |
| Variable Speed Dial and Trigger | Yes |
| Lock-On / Lock-Off | Yes |
| Length / Weight | 19.8" / 6.4 lbs |

Includes: 2738-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Backing Pad; **2738-21** (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Pack;

All Kits Include: Screen Cover, Side Handle, Bail Handle with (2) Bolts, Rapid Charger



M18[™] 2-Speed **Grease Gun Kit**

2646-22CT, 2646-21CT (2646-20 Tool-Only) Specifications:

| | opoomoutione. | |
|--|-------------------|--|
| | Output Pressure | Up to 10,000 PSI (690 BAR) |
| | Run-Time | Up to 10 Cartridges Per Charge |
| | Grease Capacity | 14 oz Cartridge, 16 oz Bulk, 16 oz Suction |
| | Air Bleeder Valve | Yes |
| | Weight | 8.5 lbs |

Includes: 2646-22CT (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; **2646-22CT** (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: 48" Flex Hose with Spring Guard, High Pressure

Grease Coupler, Shoulder Strap, Multi-Voltage Charger, Carrying Case Related Accessories:

49-16-2646 M18[™] Grease Gun 400g Clear Barrel; **49-16-2647** M18[™] Replacement Grease Gun Hose with High Pressure Coupler;

49-16-2648 M18[™] Right Angle Grease Gun Coupler; **49-16-2649** M18[™] High Pressure Grease Coupler (2 pk)



M18[™] Brushless Threaded Rod Cutter Kit

2872-21 (2872-20 Tool-Only)

Specifications:

| Cutting Capacity | 1/4", 3/8" and 1/2" |
|--------------------------|---------------------|
| Replacement Cutting Dies | Yes |
| Dimensions (L x W x H) | 10.0" x 5.0" x 6.3" |
| Weight | 7.7 lbs |
| | |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Cutting Dies, Allen Key, Multi-Voltage Charger, Carrying Case

Related Accessory: 48-44-2872 1/4", 3/8", 1/2" Replacement Cutting Die Set





w/ O-D3 Jaw

2678-220

(2678-20 Tool-Only)

w/ Kearney Jaw

2678-22K

(2678-20 Tool-Only)

w/ O-D3 Jaw

2978-22O, 2978-OKIT

(2978-20 Tool-Only)

w/ Kearney Jaw

2978-22K

(2978-20 Tool-Only)

M18™ FORCE LOGIC™ **6T Utility Crimper Kits**



w/ BG-D3 Jaw 2678-22BG (2678-20 Tool-Only)



w/ Snub Nose Jaw 2678-22 (2678-20 Tool-Only)

Specifications:

| Output Force | 6 Tons |
|-------------------------------------|----------------------------------|
| Adaptive Pressure Control System | Yes; PFM™ |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Cycle Time | 2.9 Seconds |
| Head Rotation | 340° |
| Height / Length | 5.4" / 14.0" |

Includes: 2678-22BG 6T Fixed BG Crimping Jaw; 2678-22O 6T Fixed O Crimping Jaw;

6T Linear Utility Crimper Kits

6 Tons

340°

Includes: 2978-22BG 6T Fixed BG Crimping Jaw;

Yes; PFM™

2.5 Seconds

5.1" / 19.9"

2978-BGKIT 6T Fixed BG Crimping Jaw, 750 MCM Cu/Al Cutting Jaw,

2978-OKIT 6T Fixed O Crimping Jaw, 750 MCM Cu/Al Cutting Jaw,

2678-22 6T Snub Nose Crimping Jaw; 2678-22K 6T Kearney Crimping Jaw;

M18™ FORCE LOGIC™

w/ BG-D3 Jaw

2978-22BG, 2978-BGKIT

(2978-20 Tool-Only)

w/ Snub Nose Jaw

2978-22

(2978-20 Tool-Only)

Specifications:

Adaptive Pressure

Control System

Output Force

Cycle Time

Head Rotation

Height / Length

477 ACSR Cutting Jaw;

477 ACSR Cutting Jaw:

2978-22O 6T Fixed O Crimping Jaw;

2978-22 6T Snub Nose Crimping Jaw;

All Kits Include: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger, Utility Bag

M18™ FORCE LOGIC™ **6T Pistol Utility Crimper Kits**



w/ BG-D3 Jaw 2977-22BG (2977-20 Tool-Only)

w/ O-D3 Jaw 2977-220 (2977-20 Tool-Only)

Specifications:

| 6 Tons |
|-----------------|
| Yes; PFM™ |
| 2.9 Seconds |
| 340° |
| 12.25" / 17.25" |
| |

Includes: 2977-22BG 6T Fixed BG Crimping Jaw; 2977-22O 6T Fixed O Crimping Jaw; All Kits Include: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger, Utility Bag

M18™ FORCE LOGIC™ 6T Utility

Crimper Accessories Compatible with 2678-20, 2977-20, 2978-20

6T Utility Crimper Jaws 49-16-BGD3 6T Fixed BG Crimping Jaw;

49-16-10D3 6T Fixed O Crimping Jaw; 49-16-11D3 6T Snub Nose Crimping Jaw; 49-16-KEAR 6T Kearney Crimping Jaw

Cutter Jaws

Also Compatible with 2672-21, 2672-21S, and 2672-21F

| 49-16-2772 750 MCM Cu/Al Cutting Jaw; |
|---|
| 49-16-2773 477 ACSR Cutting Jaw; |
| 49-16-2777 1/2" EHS Guy Wire Cutting Jaw; |
| 49-16-2778 Fine Stranded Wire Cutting Jaw |

Cutter Replacement Blades

48-44-0411 Replacement Copper Blades; 48-44-0412 Replacement Steel Blades:

48-44-2777 1/2" EHS Guy Wire Replacement Blades; 48-44-2778 Fine Stranded Wire Replacement Blades

W Style Dies

49-16-WBG0 W Style Die: "W-BG"; 49-16-WO00 W Style Die: "W-O"; 49-16-WC00 W Style Die: "W-C"; 49-16-W161 W Style Die: "W-161";

49-16-W162 W Style Die: "W-162"; 49-16-W163 W Style Die: "W-163"; 49-16-W164 W Style Die: "W-164"; 49-16-W165 W Style Die: "W-165";

49-16-W166 W Style Die: "W-166"; 49-16-W237 W Style Die: "W-237" 49-16-W239 W Style Die: "W-239";

49-16-W243 W Style Die: "W-243"; 49-16-W247 W Style Die: "W-247";

2978-22K 6T Kearney Crimping Jaw;
All Kits Include: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger, Utility Bag 49-16-W249 W Style Die: "W-249"; 49-16-W840 W Style Die: "W-K840"

M18™ FORCE LOGIC™ **600 MCM Crimper Kit**

2679-22, 2679-750C, 2679-750A, 2679-350A, 2679-600C

Specifications:

| Output Force | 6 Tons |
|----------------------------------|-------------------------------|
| Adaptive Pressure Control System | Yes; PFM™ |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Cycle Time | 2.9 Seconds |
| Head Rotation | 350° |
| Height / Length | 5.4" / 13.3" |

Includes: 2679-750C 750 MCM Cu/Al Crimping Jaw, All Copper U Style Dies (49-16-KITC Die Kit and 49-16-750C Die Kit); 2679-750A 750 MCM Cu/Al Crimping Jaw, All Aluminum U Style Dies (49-16-KITA Die Kit and 49-16-750A Die Kit); 2679-350A 49-16-KITA Die Kit; 2679-600C 49-16-KITC Die Kit;

All Kits Include: 2679-22 600 MCM Commercial U Crimping Jaw, (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger, Carrying Case

FORCE LOGIC™ 600 MCM **Crimper Accessories**

Compatible with 2679-22, 2679-750C, 2679-750A 2679-350A, 2679-600C

Related Accessories:

49-16-U000 600 MCM Crimping Jaw; 49-16-U111 750 MCM Cu/Al Cable Crimping Jaw; **49-16-2780** 750 MCM Cu/Al Cable Cutting Jaw

Cutter Replacement Blades

48-44-0411 750 MCM Cu/Al Cable Cutting Blades

Accessory Kits

49-16-KITA #8 AWG - 350 MCM Aluminum U Style Die Kit; 49-16-750A 400 - 750 MCM Aluminum U Style Die & Jaw Kit; 49-16-KITC #8 AWG - 600 MCM Copper U Style Die Kit; 49-16-750C 750 MCM Copper U Style Die & Jaw Kit

Copper U Style Dies

49-16-U001C #1 Copper U Style Die: 49-16-U002C #2 Copper U Style Die; **49-16-U004C** #4 Copper U Style Die; **49-16-U006C** #6 Copper U Style Die; 49-16-U008C #8 Copper U Style Die; 49-16-U01AC 1/0 Copper U Style Die 49-16-U02AC 2/0 Copper U Style Die; 49-16-U03AC 3/0 Copper U Style Die; 49-16-U04AC 4/0 Copper U Style Die; 49-16-U250C 250 MCM Copper U Style Die 49-16-U300C 300 MCM Copper U Style Die; 49-16-U350C 350 MCM Copper U Style Die; 49-16-U400C 400 MCM Copper U Style Die; 49-16-U500C 500 MCM Copper U Style Die; 49-16-U600C 600 MCM Copper U Style Die; **49-16-U750C** 750 MCM Copper U Style Die

Aluminum Dual-Rated U Style Dies 49-16-U001 #1 Aluminum U Style Die: 49-16-U002 #2 Aluminum U Style Die: 49-16-U004 #4 Aluminum U Style Die; 49-16-U006 #6 Aluminum U Style Die; 49-16-U008 #8 Aluminum U Style Die; 49-16-U01A 1/0 Aluminum U Style Die; 49-16-U02A 2/0 Aluminum U Style Die; 49-16-U03A 3/0 Aluminum U Style Die; 49-16-U04A 4/0 Aluminum U Style Die; 49-16-U250 250 MCM Aluminum U Style Die; 49-16-U300 300 MCM Aluminum U Style Die; 49-16-U350 350 MCM Aluminum U Style Die; 49-16-U400 400 MCM Aluminum U Style Die; 49-16-U500 500 MCM Aluminum U Style Die; 49-16-U600 600 MCM Aluminum U Style Die; 49-16-U750 750 MCM Aluminum U Style Die


M18™ FORCE LOGIC™ **750 MCM Dieless Crimper Kit**

2877-22

Specifications:

| Crimping Capacity | #6 - 750 MCM Cu & Al |
|--------------------------------|----------------------------------|
| Adaptive Distance Control | Yes; Auto Distance Control |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Dimensions (L x W x H) | 18.9" x 3.3" x 6.5" |
| Weight | 9.0 lbs |

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, Multi-Voltage Charger, Carrying Case

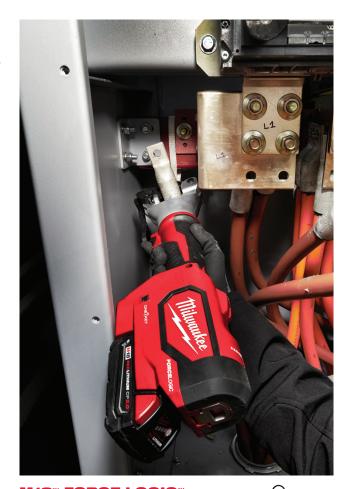

M18™ FORCE LOGIC™ **12T Utility Crimper Kit**

2778-22 (2778-20 Tool-Only)

Specifications:

| Output Force | 12 Tons |
|--------------------------------|----------------------------------|
| Head Rotation | 350° |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Length / Weight | 16.0" / 11.9 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack. (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag



M18™ FORCE LOGIC™ **750 MCM Crimper Kit**

2779-22, 2779-750A, 2779-750C

Specifications:

| Output Force | 12 Tons |
|--------------------------------|----------------------------------|
| Head Rotation | 350° |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Length / Weight | 16.0" / 11.5 lbs |

Includes: 2779-750A 49-12-KITA; **2779-750C** 49-12-KITC; **All Kits Include: 2779-22** (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Related Accessories:

Accessory Kits

49-12-KITC EXACT™ #6 AWG - 750 MCM Cu 12T U Style Die Kit; 49-12-KITA EXACT™ #6 AWG - 750 MCM AI 12T U Style Die Kit

EYACT™ 12T Coppor II Style Dies

| EXACT 12T Copper U Style Dies |
|--|
| 49-12-U001C #1 Copper 12T U Style Die; |
| 49-12-U002C #2 Copper 12T U Style Die; |
| 49-12-U004C #4 Copper 12T U Style Die; |
| 49-12-U006C #6 Copper 12T U Style Die; |
| 49-12-U008C #8 Copper 12T U Style Die; |
| 49-12-U01AC 1/0 Copper 12T U Style Die; |
| 49-12-U02AC 2/0 Copper 12T U Style Die; |
| 49-12-U03AC 3/0 Copper 12T U Style Die; |
| 49-12-U04AC 4/0 Copper 12T U Style Die; |
| 49-12-U250C 250 MCM Copper 12T U Style Die; |
| 49-12-U300C 300 MCM Copper 12T U Style Die; |
| 49-12-U350C 350 MCM Copper 12T U Style Die; |
| 49-12-U400C 400 MCM Copper 12T U Style Die; |
| 49-12-U500C 500 MCM Copper 12T U Style Die; |

49-12-U600C 600 MCM Copper 12T U Style Die;

| 49-12-00000 000 MICINI Copper 121 0 Style Die, |
|--|
| 49-12-U750C 750 MCM Copper 12T U Style Die |
| EXACT™ 12T Aluminum U Style Dies |
| 49-12-U001 #1 Aluminum 12T U Style Die; |
| 49-12-U002 #2 Aluminum 12T U Style Die; |
| 49-12-U004 #4 Aluminum 12T U Style Die; |
| 49-12-U006 #6 Aluminum 12T U Style Die; |
| 49-12-U008 #8 Aluminum 12T U Style Die; |
| 49-12-U01A 1/0 Aluminum 12T U Style Die; |
| 49-12-U02A 2/0 Aluminum 12T U Style Die; |
| 49-12-U03A 3/0 Aluminum 12T U Style Die; |
| 49-12-U04A 4/0 Aluminum 12T U Style Die; |
| 49-12-U250 250 MCM Aluminum 12T U Style Die; |
| 49-12-U300 300 MCM Aluminum 12T U Style Die; |
| 49-12-U350 350 MCM Aluminum 12T U Style Die; |
| 49-12-U400 400 MCM Aluminum 12T U Style Die; |
| 49-12-U500 500 MCM Aluminum 12T U Style Die; |
| 49-12-U600 600 MCM Aluminum 12T U Style Die; |
| 49-12-U750 750 MCM Aluminum 12T U Style Die |

M18™ FORCE LOGIC™ 15T Crimper Kit

2879-22 (2879-20 Tool-Only)

Specifications:

| • | |
|-----------------------------------|------------------------------------|
| Crimping Capacity | #8 - 1500 MCM Cu, #8 - 1250 MCM AI |
| Output Force | 15 Tons |
| Adaptive Pressure Control | Yes; PFM™ |
| Reporting and Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Dimensions (L x W x H) | 23.3" x 3.1" x 5.5" |
| Weight | 16.1 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, (1) M18[™] REDLITHIUM™ CP2.0 Battery Pack, P-to-U Die Adapter, Carabiner, Multi-Voltage Charger, Contractor Bag

Related Accessories:

| 49-15-PUAD P-to-U Die Adapter; |
|--|
| 49-15-P750 15T 750 MCM Al P-Die; |
| 49-15-P800 15T 800 MCM AI P-Die; |
| 49-15-P000 15T 1000 MCM AI P-Die; |
| 49-15-P750C 15T 750 MCM Cu P-Die |
| 49-15-P800C 15T 800 MCM Cu P-Die |
| 49-15-P000C 15T 1000 MCM Cu P-Di |
| |



M18™ FORCE LOGIC™ 10,000 PSI **Hydraulic Pump Kit**

2774-21HD (2774-20 Tool-Only)

Specifications:

| Operating Pressure | 10,000 psi / 700 bar |
|----------------------------|----------------------------|
| Usable Oil Capacity | 1.4 qts |
| Flow Rate at Low Pressure | 125.0 in ³ /min |
| Flow Rate at High Pressure | 25.6 in ³ /min |
| Ingress Protection | IP54 |
| Dimensions (L x W x H) | 15.8" x 11.5" x 13.9" |
| Weight | 29.7 lbs |

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Rapid Charger

Related Accessories:

49-12-2776 Bucket Hanger; 49-12-2775 6' Controller Extension



| Milmuk | |
|--------|--|

M18™ FORCE LOGIC™ Cable Cutter Kit w/ 750 MCM Cu Jaws

2672-21

Specifications:

| Cut Capacity | 750 MCM Cu, 1000 MCM Al |
|-------------------|----------------------------------|
| Average Cut Speed | 3 Seconds |
| Head Rotation | 350° |
| Auto Reset | Yes |
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 5.4" / 14.0" |

Includes: (1) M18[™] REDLITHIUM[™] CP2.0 Battery Pack. 750 MCM Cable Cutter Jaw, Allen Wrench, Multi-Voltage Charger, Carrying Case

M18™ FORCE LOGIC™ Cable Cutter Kit w/ 477 ACSR Jaws

2672-21S

Specifications:

| Cut Capacity | 477 HEN ACSR |
|-------------------|----------------------------------|
| Average Cut Speed | 3 Seconds |
| Head Rotation | 350° |
| Auto Reset | Yes |
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 5.4" / 14.0" |

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, 477 ACSR Cutting Jaw, Carabiner, Allen Wrench, Multi-Voltage Charger and Inverter, Bucket Bag

M18™ FORCE LOGIC™ Cable Cutter Kit w/ Fine Stranded Wire Jaws

2672-21F

Specifications:

| Cut Capacity | 777.7 MCM Fine Stranded Wire |
|-------------------|----------------------------------|
| Average Cut Speed | 3 Seconds |
| Head Rotation | 350° |
| Auto Reset | Yes |
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 5.4" / 14.0" |
| | |

Includes: (1) M18[™] REDLITHIUM[™] CP2.0 Battery Pack, Fine Stranded Wire Cutting Jaw, Allen Wrench, Multi-Voltage Charger, Carrying Case

FORCE LOGIC™ Cable Cutter Accessories

Compatible with 2672-21, 2672-21S and 2672-21F

Cutter Jaws

49-16-2772 750 MCM Cu/Al Cutting Jaw; 49-16-2773 477 ACSR Cutting Jaw;

49-16-2777 1/2" EHS Guy Wire Cutting Jaw; 49-16-2778 Fine Stranded Wire Cutting Jaw

Cutter Replacement Blades

48-44-0411 Copper Replacement Blades;

48-44-0412 ACSR Replacement Blades; 48-44-2777 1/2" EHS Guy Wire Replacement Blades;

48-44-2778 Fine Stranded Wire Replacement Blades

M18™ FORCE LOGIC™ 3" Underground **Cable Cutter Kit** w/ Wireless Remote

2776R-21

Specifications:

| Cut Capacity | 1500 MCM Cu 15kV |
|------------------|----------------------------------|
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 12.4" / 20.8" |
| Weight | 15.8 lbs |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Remote, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag Related Accessory:

49-16-2774 3" Underground Replacement Blades

M18™ FORCE LOGIC 3" Underground **Cable Cutter Kit** 2776-21

Specifications:

| Cut Capacity | 1500 MCM Cu 15kV |
|------------------|----------------------------------|
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 12.4" / 20.8" |
| Weight | 15.8 lbs |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag Related Accessory:

49-16-2774 3" Underground Replacement Blades



M18™ FORCE LOGIC™ **1590 ACSR Cutter Kit**

2777-21

Specifications:

| Cut Capacity | Up to 1590 Falcon ACSR |
|------------------|----------------------------------|
| Tool Diagnostics | Built-In; ONE-KEY™ Compatible |
| Height / Length | 10.6" / 16.8" |
| Weight | 11.8 lbs |

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Carabiner, Side Handle, Multi-Voltage Charger and Inverter, Utility Bag

Related Accessory:

49-16-2775 1590 ACSR Replacement Blades



M18™ FORCE LOGIC™ **6 Ton Knockout Tool Kit**

2677-23, 2677-21 (2677-20 No Punches or Dies)

Specifications:

| - | |
|----------------------------|----------------|
| Mild Steel Capacity | 4" in 14 Gauge |
| Stainless Steel Capacity | 2" in 14 Gauge |
| Output Force | 6 Tons |
| Quick-Connect Draw Stud | Yes |
| Rapid Reset | Yes |
| Height / Weight | 4.5" / 4.3 lbs |
| | |

Includes: 2677-23 (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, EXACT™ 1/2" - 4" Conduit Punches and Dies; 2677-21 (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, EXACT™ 1/2" - 2" Conduit Punches and Dies; **2677-20** (1) M18™ REDLITHIUM™ CP2.0 Battery Pack (No Punches or Dies Included); All Kits Include: (2) Draw Studs, Quick Connect Alignment System, Multi-Voltage Charger, Carrying Case



M18™ FORCE LOGIC™ **10 Ton Knockout Tool Kit**

2676-23, 2676-22 (2676-20 No Punches or Dies)

Specifications:

| Mild Steel Capacity | 6" in 12 Gauge |
|--------------------------|----------------|
| Stainless Steel Capacity | 6" in 14 Gauge |
| Output Force | 10 Tons |
| Quick-Connect Draw Stud | Yes |
| Rapid Reset | Yes |
| Height / Weight | 5.5" / 7.1 lbs |
| | |

Includes: 2676-23 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, EXACT™ 1/2" - 4" Conduit Punches and Dies; 2676-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, 1/2" - 2" EXACT™ Conduit Punches and Dies; **2676-20** (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs (No Punches or Dies Included); All Kits Include: (3) Draw Studs, Quick Connect Alignment System, Multi-Voltage Charger, Carrying Case

FORCE LOGIC™ Knockout Accessories

Compatible with 2677-20 and 2676-20

EXACT™ Accessory Kits

49-16-2692 1/2" - 1-1/4" Knockout Set:

49-16-2693 1/2" – 2" Knockout Set: 49-16-2694 1/2" - 2" Hand Ratchet Knockout Set;

49-16-2695 2-1/2" - 4" Knockout Set

EXACT™ Punches and Dies

| EXACT I dilones and Di | • |
|------------------------------|---|
| 49-16-2660* 1/2" Die; | |
| 49-16-2660S 1/2" Die; | |
| 49-16-2661* 1/2" Punch; | |
| 40-16-2661S 1/2" Punch: | |

49-16-2662 3/4" Die: 49-16-2663 3/4" Punch: 49-16-2664 1" Die;

49-16-2665 1" Punch; 49-16-2666 1-1/4" Die; 49-16-2667 1-1/4" Punch;

49-16-2668 1-1/2" Die;

49-16-2669 1-1/2" Punch;

49-16-2670 2" Die; **49-16-2671** 2" Punch;

49-16-2672 2-1/2" Die;

49-16-2673 2-1/2" Punch;

49-16-2674 3" Die:

49-16-2675 3" Punch:

49-16-2676 3-1/2" Die: 49-16-2677 3-1/2" Punch;

49-16-2678 4" Die;

49-16-2679 4" Punch; 49-16-2686 5" Die;

49-16-2687 5" Punch;

49-16-2688 6" Die;

49-16-2689 6" Punch

*These items are intended only for Mild Steel.

EXACT™ Sink Punches & Dies

49-16-2705 7/8" Sink Die; 49-16-2706 7/8" Sink Punch:

49-16-2700 1-3/8" Sink Die; 49-16-2701 1-3/8" Sink Punch

RAPID RESET DRAW STUDS

49-16-2703 Rapid Reset 3/4" Draw Stud: 49-16-2704 Rapid Reset 1-1/8" Draw Stud; 49-16-2708 Rapid Reset 1-1/8" Long Draw Stud

Draw Studs

49-16-2621 3/8" Ball Bearing Draw Stud; 49-16-2622 3/4" Ball Bearing Draw Stud;

49-16-2680 7/16" Draw Stud:

49-16-2681 3/4" Draw Stud: 49-16-2682 1-1/8" Draw Stud;

49-16-2707 1-1/8" Long Draw Stud

Adapters

49-16-2684 3/8" Adapter for EXACT™ 2-1/2" - 4" Dies to 3/4" Draw Studs: 49-16-2685 Adapter for M18™ FORCE LOGIC™ Knockout Tool to other major brands of punches and dies

M18™ Cable Stripper Kit

2935CU-21S, 2935AL-21, 2935X-21 (2935-20 Tool-Only)

Specifications:

| Variable Speed Trigger | Yes |
|-----------------------------|-----------------------------------|
| Tool Free Depth Gauge | Yes |
| Compatible Bushing Types | Industry Standard Quick-Change |
| Dimensions (L x W x H) | 8.5" x 2.8" x 11.3" |
| Weight | 3.8 lbs |

Includes: 2935CU-21S 1/0 AWG - 750 MCM Cu THHN / XHHW Bushings; $\bf 2935AL-21$ 1/0 AWG – 750 MCM AI THHN / XHHW Bushings; **2935X-21** 1/0 AWG - 500 MCM Cu RHW / RHH / USE Bushings; **All Kits Include:** (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Cable Stripper Accessories

Compatible with 2935-20, 2435-20

Bushing Kits

49-16-BKITC 1/0 AWG - 750 MCM Cu THHN / XHHW Bushing Kit; 49-16-BKITA 1/0 AWG - 750 MCM AI THHN / XHHW Bushing Kit

Bushings - Cu THHN / XHHW

49-16-B01AC 1/0 AWG Cu THHN / XHHW Bushing; 49-16-B02AC 2/0 AWG Cu THHN / XHHW Bushing; 49-16-B03AC 3/0 AWG Cu THHN / XHHW Bushing; 49-16-B04AC 4/0 AWG Cu THHN / XHHW Bushing; 49-16-B250S 250 MCM Cu THHN / XHHW S Bushing;

49-16-B250C 250 MCM Cu THHN / XHHW Bushina: 49-16-B300\$ 300 MCM Cu THHN / XHHW S Bushing;

49-16-B300C 300 MCM Cu THHN / XHHW Bushing; **49-16-B350S** 350 MCM Cu THHN / XHHW S Bushing; **49-16-B350C** 350 MCM Cu THHN / XHHW Bushing;

49-16-B400S 400 MCM Cu THHN / XHHW S Bushing; 49-16-B400C 400 MCM Cu THHN / XHHW Bushing; 49-16-B500S 500 MCM Cu THHN / XHHW S Bushing;

49-16-B500C 500 MCM Cu THHN / XHHW Bushing; 49-16-B600\$ 600 MCM Cu THHN / XHHW S Bushing; 49-16-B600C 600 MCM Cu THHN / XHHW Bushing; **49-16-B750C** 750 MCM Cu THHN / XHHW Bushing

Bushings - AI THHN / XHHW 49-16-B01A 1/0 AWG AI THHN / XHHW Bushing; 49-16-B02A 2/0 AWG AI THHN / XHHW Bushing; 49-16-B03A 3/0 AWG AI THHN / XHHW Bushing; 49-16-B04A 4/0 AWG AI THHN / XHHW Bushing; 49-16-B250 250 MCM AI THHN / XHHW Bushing; 49-16-B300 300 MCM AI THHN / XHHW Bushing; 49-16-B350 350 MCM AI THHN / XHHW Bushing; 49-16-B400 400 MCM AI THHN / XHHW Bushing; 49-16-B500 500 MCM AI THHN / XHHW Bushing; 49-16-B600 600 MCM AI THHN / XHHW Bushing; 49-16-B750 750 MCM AI THHN / XHHW Bushing

Bushings - Cu RHW / RHH / USE

49-16-B01AX 1/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B02AX 2/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B03AX 3/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B04AX 4/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B250X 250 MCM Cu RHW / RHH / USE Bushing; 49-16-B300X 300 MCM Cu RHW / RHH / USE Bushing: 49-16-B350X 350 MCM Cu RHW / RHH / USE Bushing; 49-16-B500X 500 MCM Cu RHW / RHH / USE Bushing

Replacement Blade for Bushings

48-44-2935 Replacement Blade for Cable Stripper Bushings

ANGLER™ Pulling **Fish Tape Kit**

2873A-22, 2873B-22 (2873-20 Tool-Only)

Specifications:

| Pull Force | (4) #10 Wires |
|---------------------------|--|
| Powered Feed & Retract | Yes, AUTO-RUN™ Powered Feed & Retract |
| Dimensions (L x W x H) | 13.2" x 6.0" x 17.7" |
| Weight | 19.1 lbs (2873B), 16.2 lbs (2873A), 8.3 lbs (2873) |

Includes: 2873A-22: ANGLER™ 120' x 1/8" Steel Pulling Fish Tape; 2873B-22: ANGLER™ 240' x 1/8" Steel Pulling Fish Tape Replacement Cartridge;

All Kits Include: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger

Related Accessories:

48-44-5176 M18 FUEL™ ANGLER" 120' x 1/8" Steel Pulling Fish Tape Replacement Cartridge;

48-44-5178 M18 FUEL™ ANGLER™

240' x 1/8" Steel Pulling Fish Tape Replacement Cartridge;

48-44-5195 M18 FUEL™ ANGLER™



M18 FUEL **Pipe Threader** w/ ONE-KEY™ Kit

2874-22HD (2874-20 Tool-Only)



| Capacity | 1/8" – 2" | REPLITHIUM |
|-------------------------|------------------|-------------------|
| Kickback Control | AUTOSTOP™ | HIGH OUTPUT HD120 |
| Threading Support Arm | Yes | |
| Trigger | Variable Speed | |
| Die Head Retention Lock | Yes | |
| Die Head Compatibility | RIDGID® 12R, Ree | d R12+ |
| | | |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Threading Support Arm, Rapid Charger, Carrying Case




M18™ FORCE LOGIC **Press Tool Kit** w/ ONE-KEY with 1/2" - 2" CTS Jaws

2922-22 (2922-20 No Jaw Kit)

Specifications:

| 1/2" – 4" (Varies by Material) |
|--------------------------------|
| 50,000 Cycles |
| 4 Seconds |
| 7,200 lbs |
| Report. Track. Manage. |
| Wireless, Mobile, Desktop |
| 14.1" / 6.5 lbs |
| F |

Includes: (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, (6) CTS Jaws (1/2", 3/4", 1", 1-1/4", 1-1/2", 2"), Multi-Voltage Charger, Carrying Case; 2922-20 No Jaws Included

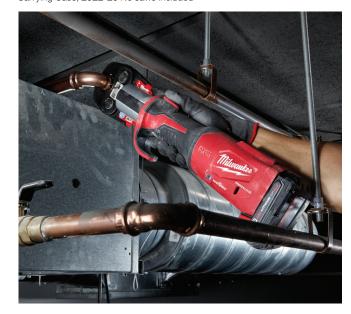

M18™ FORCE LOGIC™ **Long Throw Press Tool Kit**

2773-22L (2773-20L No Jaw Kit)

Specifications:

| - | |
|------------------------|---|
| Capacity | 1/2" - 4" (Varies by Material) |
| Calibration Interval | 50,000 Cycles (LED Indicator) |
| Approximate Cycle Time | 4 Seconds, 8 Seconds at Extended Stroke |
| Press Force | 7,200 lbs |
| Length / Weight | 20.1" / 10.1 lbs |
| | |

Includes: 2773-22L (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, (3) Jaws (1/2", 3/4", 1"), Multi-Voltage Charger, Carrying Case; 2773-20L No Jaws Included



FORCE LOGIC™ Press Tool Accessories

Compatible with 2922-20 and 2773-20L

Accessory Kits

49-16-2696 1/2" – 1" Black Iron Press Kit; **49-16-2690** Press Ring 2-1/2" – 4" Kit; 49-16-2691* SS Press Ring 1-1/2" - 2" Kit; 49-16-2697 1/2" - 2" Black Iron Press Kit; **49-16-2698*** 2-1/2" – 4" IPS XL Ring Kit

CTS Jaws & Rings 49-16-2650 1/2" Jaw

| | ., , |
|------------|-------------|
| 49-16-2651 | 3/4" Jaw; |
| 49-16-2652 | 1-1/4" Jaw |
| 49-16-2653 | 1-1/2" Jaw |
| 49-16-2654 | 2" Jaw; |
| 49-16-2655 | 2-1/2" Ring |
| 49-16-2656 | 3" Ring; |
| 49-16-2657 | 4" Ring: |

49-16-2658 Ring Jaw 1

IPS Jaws & Rings 49-16-2650B 1/2" Jaw; 40-16-2651B 2/4" low:

| 49-10-2001D 3/4 Jaw; |
|----------------------------------|
| 49-16-2652B 1" Jaw; |
| 49-16-2653B 1-1/4" Ring; |
| 49-16-2654B 1-1/2" Ring; |
| 49-16-2655B 2" Ring; |
| 49-16-2656B* 2-1/2" IPS XL Ring; |
| 49-16-2657B* 3" IPS XL Ring; |
| 49-16-2658B* 4" IPS XL Ring; |
| 49-16-2650S 1/2" SS Jaw; |
| 49-16-2651S 3/4" SS Jaw; |
| 49-16-2652S 1" SS Jaw; |
| 49-16-2654S* 1-1/2" SS Ring; |
| 49-16-2655S* 2" SS Ring |
| |

PEX Jaws & Rings

| I LA Cawa a Illiga |
|---|
| 49-16-2651C 1/2" PEX Crimp (F1807 & F2159) Jaw; |
| 49-16-2653C 3/4" PEX Crimp (F1807 & F2159) Jaw; |
| 49-16-2654C 1" PEX Crimp (F1807 & F2159) Jaw; |
| 49-16-2655C 1-1/4" PEX Crimp (F1807) Jaw; |
| 49-16-2656C 1-1/2" PEX Crimp (F1807) Jaw; |
| 49-16-2657C 2" PEX Crimp (F1807) Jaw |
| *Compatible with 2773-20L only. |

M18™ Short Throw Press Tool w/ PEX Crimp Jaws Kit

Spec

Includes: 2674-22C (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger; 2674-20C Battery and Charger Sold Separately;

2674-22C, 2674-20C

| cifications: | | 3 6 | TANK THE | Milwankee |
|--------------|-----------------|-----|----------|--|
| acity | Up to 1" | 100 | | |
| e Time | 3 Seconds | | | The second secon |
| Cycle | Yes | | | |
| th / Weight | 13.5" / 4.8 lbs | | | |

All Kits Include: (3) PEX Crimp Jaws (1/2", 3/4", 1"), Carrying Case

M18™ Short Throw Press Tool

w/ Viega® PureFlow® Jaws Kit

2674-22P, 2674-20P

Specifications:

| Capacity | Up to 1 | " |
|-------------|--------------|---------|
| Cycle Time | 3 Seco | nds |
| Auto Cycle | Yes | |
| Lenath / We | iaht 13.5" / | 4.8 lbs |

Includes: 2674-22P (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger; 2674-20P Battery and Charger Sold Separately; All Kits Include: (3) Viega® PureFlow® Jaws (1/2", 3/4", 1"), Carrying Case



Short Throw Press Tool Accessories

49-16-2630C 3/8" PEX Crimp Jaw; 49-16-2631C 1/2" PEX Crimp Jaw; 49-16-2632C 5/8" PEX Crimp Jaw; 49-16-2633C 3/4" PEX Crimp Jaw; **49-16-2634C** 1" PEX Crimp Jaw; 49-16-2630P 3/8" Viega® PureFlow® Jaw 49-16-2631P 1/2" Viega® PureFlow® Jaw; 49-16-2632P 5/8" Viega® PureFlow® Jaw; 49-16-2633P 3/4" Viega® PureFlow® Jaw;

49-16-2634P 1" Viega® PureFlow® Jaw

Compatible with 2674-20C and 2674-20P

M18™ FORCE LOGIC™ 2" - 3" **ProPEX® Expansion Tool Kit** 2633-22HD

Specifications:

| apacity | 2", 2-1/2" and 3" |
|-----------------------|----------------------|
| uto-Rotation | Built-In |
| uto-Cycle | Built-In |
| imensions (L x W x H) | 14.5" x 11.8" x 4.8" |
| /eight | 13.1 lbs |
| | |

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Packs, (3) ProPEX® Expansion Heads (2", 2-1/2", 3"), Side Handle, Grease, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-08-2401 150g ProPEX® Expander Cone Grease; **49-16-2614** 2" ProPEX® Expansion Head; **49-16-2616** 2-1/2" ProPEX® Expansion Head; 49-16-2618 3" ProPEX® Expansion Head



M18™ ProPEX® **Expansion Tool Kit**

2632-22XC (2632-20 Tool-Only)

Specifications

| specifications: | |
|------------------------|---------------------|
| Capacity | 3/8" - 1-1/2" |
| Auto-Rotation | Built-In |
| Dimensions (L x W x H) | 8.7" x 4.4" x 10.8" |
| Weight | 9.2 lbs |

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, (3) ProPEX® Expansion Heads (1", 1-1/4", 1-1/2"), Grease, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-08-2400 ProPEX® Expander Cone Grease; 49-16-2608 1" ProPEX® Expansion Head; 49-16-2610 1-1/4" ProPEX® Expansion Head; 49-16-2612 1-1/2" ProPEX® Expansion Head



Sewer Sectional Machine Kit w/ CABLE DRIVE"

2871A-22, 2871-22

Specifications:

| Maximum Drain Line Capacity | 2" – 8" up to 200" |
|---------------------------------|--------------------|
| Cable Capacity | 7/8" and 1-1/4" |
| Powered Cable Feed & Retract | Yes, CABLE DRIVE™ |
| Cable Spin Speed | 700 RPM |
| Height / Length | 23" / 35" |
| | |

Weight 74 lbs

Includes: 2871A-22 (7) 1-1/4" x 15' All Purpose Open Wind Cables, (2) Cable Containers, Straight Auger, Funnel Auger, Small Opening Tool, Medium Opening Tool, 3" Grease Cutter, 3" Root Cutter, 4" Root Cutter, Pin Key, Head Attachment Case;

All Kits Include: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Rear Guide Hose, Rapid Charger



M18 FLEL **Sectional Machine for** 5/8" & 7/8" Cable

2818-21, 2818A-21, 2818B-21

Specifications:

| Maximum Drain Line Capacity | 1-1/4" – 6" out to 150' |
|--------------------------------|-------------------------|
| Cable Capacity | 5/8" and 7/8" |
| Cable Feed & Retract | Manual |
| Cable Spin Speed | 650 RPM |
| Height / Length | 15.1" / 14.6" |
| Weight | 27.3 lbs |

Includes: 2818-21: Large Rear Guide Hose; 2818A-21: Large Rear Guide Hose, Medium Cable Container, (5) 7/8" x 15' All Purpose Open Wind Sectional Cables, 2" – 4" Head Attachment Kit; 2818B-21: Small Rear Guide Hose, Small Cable Container,

(6) 5/8" x 7-1/2' All Purpose Open Wind Sectional Cables, 1/4" - 2" Head Attachment Kit;

All Kits Include: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Carry Strap, Rapid Charge



Sectional Machine Cables and Accessories

Related Accessories:

47-53-2871 Cable Container; 47-53-2872 Rear Guide Hose; 47-53-2874 Small Rear Guide Hose; 47-53-2873 Large Rear Guide Hose; 47-53-2869 Small Cable Container; 47-53-2870 Medium Cable Container;

48-08-0555 Carrying Strap Compatible with 2818-20

48-53-2680 5/8" x 7.5' All Purpose Sectional Cable:

48-53-3811 Drop Head Bulb Auger w/ RUST GUARD™ for 5/8" Sectional Cable; 48-53-3812 Drop Head Straight Auger w/ RUST GUARD™ for 5/8" Sectional Cable;

48-53-3813 Flexible Funnel Auger w/ RUST GUARD™ for 5/8" Sectional Cable; 48-53-3814 Flexible Opening Tool w/ RUST GUARD™ for 5/8" Sectional Cable; 48-53-3815 2" Opening Tool w/ RUST GUARD™ for 5/8" Sectional Cable;

48-53-3820 1-1/4" - 2" Head Attachment Kit w/ RUST GUARD™

for 5/8" Sectional Cable

Compatible with 2818-20 and 2871-20

7/8"

48-53-2852 7/8" x 15' All Purpose Sectional Cable;

48-53-3829 Flexible Straight Auger w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3830 Straight Auger w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3828 Flexible Funnel Auger w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3831 Funnel Auger w/ RUST GUARD™ for Sectional Cable;

48-53-3825 2" Root Cutter w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3832 3" Root Cutter w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3833 4" Root Cutter w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3834 6" Root Cutter w/ RUST GUARD™ for 7/8" Sectional Cable:

48-53-3827 2" Opening Tool w/ RUST GUARD™ for 7/8" Sectional Cable; **48-53-3835** 3" Opening Tool w/ RUST GUARD™ for 7/8" Sectional Cable:

48-53-3836 4" Opening Tool w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3837 3" Grease Cutter w/ RUST GUARD™ for 7/8" Sectional Cable; 48-53-3838 4" Grease Cutter w/ RUST GUARD™ for 7/8" Sectional Cable;

48-53-3839 2" - 4" Head Attachment Kit w/ RUST GUARD"

for 7/8" Sectional Cable; 48-53-3840 3" - 6" Head Attachment Kit w/ RUST GUARD™

for 7/8" Sectional Cable

Compatible with 2871-20

1-1/4"

48-53-2851 1-1/4" x 15' All Purpose Sectional Cable; 48-53-2854 1-1/4" x 15' Heavy Duty Sectional Cable

48-53-4830 Straight Auger w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4831 Funnel Auger w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4832 3" Root Cutter w/ RUST GUARD™ for 1-1/4" Sectional Cable; 48-53-4833 4" Root Cutter w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4834 6" Root Cutter w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4835 3" Opening Tool w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4836 4" Opening Tool w/ RUST GUARD™ for 1-1/4" Sectional Cable;

48-53-4837 3" Grease Cutter w/ RUST GUARD™ for 1-1/4" Sectional Cable:

48-53-4838 4" Grease Cutter w/ RUST GUARD™ for 1-1/4" Sectional Cable; 48-53-4840 3" - 8" Head Attachment Kit w/ RUST GUARDT

for 1-1/4" Sectional Cable:

44-60-0005 Pin Key for Drain Cleaning;

48-53-2839 Head Attachment Case



2775-211, 2775A-211, 2775B-211, 2775C-222, 2775E-211

Specifications:

| Maximum Drain Line Capacity | 1-1/4" – 4" up to 100' (not for roots) |
|--------------------------------|---|
| Drum Capacity | Inner Core Cables: 5/16" x 75', Best for 1-1/4" – 2-1/2" drain lines; 3/8" x 50', Best for 2" – 3" drain lines; 1/2" x 50', Best for 3" – 4" drain lines |
| | Open Wind Cables: 5/8" x 50', Best for 1-1/4" – 3" drain lines (soft blockages) |
| Backpack Straps | Yes |
| Removable Drum | Yes, Tool-Free |
| Cable Spin Speed | 250 RPM |
| Electronic Foot Pedal | Yes |
| Integrated Drum Brake | Yes |
| Length | 15.8" |
| | |

Includes: 2775A-211: 5/16" x 75' Inner Core Drop Head Cable w/ RUST GUARD™ Plating;

2775B-211: 3/8" x 50' Inner Core Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD™ Plating (1-1/2" Spade Bit, 1-1/2" C-Cutter, Medium Funnel, Medium Drop Head), Pin Key; 2775C-222: Additional M18™ REDLITHIUM™ XC5.0 Battery Pack, Additional

SWITCH PACK™ Drum w/ Anchor Cable, (2) 1/2" x 50' Inner Core Coupling Cables w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD™ Plating (1-1/2" Spade Bit, 1-1/2" C-Cutter, Medium Funnel, Medium Drop Head), Pin Key:

2775E-211: 5/8" x 50' Open Wind Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD*** Plating (1* Spade Bit, 1* C-Cutter, Small Bulb Head, Small Drop Head), Pin Key;

All Kits Include: 2775-211: SWITCH PACK™ Powered Base, SWITCH PACK™ Drum w/ Anchor Cable, (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger

Related Accessories:

47-53-2775 SWITCH PACK™ Drum w/ Anchor Cable;

47-53-2774 CABLE DRIVE™ Assembly:

47-53-2773 Mounting Plate:

47-53-2776 Guide Hose

M18 FUEL

Drain Snake w/ CABLE DRIVE Locking Feed System Kit

2772A-21 (2772A-20 Tool-Only), 2772B-21XC

Specifications:

| Maximum Drain Line Capacity | 1-1/4" – 3" up to 50' |
|---------------------------------|---|
| Drum Capacity | 1/4" x 50', Best for 1-1/4" - 2" drain lines; 5/16" x 50', Best for 1-1/4" - 2-1/2" drain lines; 3/8" x 35', Best for 2" - 3" drain lines |
| Powered Cable Feed & Retract | Yes, CABLE DRIVE™ |
| Variable Feed Speed | 0 - 8" Per Second |
| Variable Spin Speed | 0 – 600 RPM |
| Feed Lock | Yes, Twist Lock |
| Cable Lock | Yes, Twist Lock |
| LED Light | Yes |
| Length / Weight | 19.5" / 8.2 lbs |

Includes: 2772A-21 (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, 5/16" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating; 2772B-21XC (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, 1/4" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating, 3/8" x 35' Inner Core Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Attachments (1" Spade Bit, 1" C-Cutter, Small Bulb Head, Small Drop Head), Pin Key; 2772A-20 Only Includes 5/16" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating, Battery and Charger Sold Separately; All Kits Include: Multi-Voltage Charger, Storage Bucket

Drain Cleaning Accessories

Compatible with MILWAUKEE® and other professional brand drain cleaning machines

RUST GUARD™ Plated Cables

48-53-2563 1/4" x 25' Inner Core Bulb Head Handheld Cable; 48-53-2564 1/4" x 25' Inner Core Drop Head Handheld Cable; 48-53-2671 1/4" x 35' Inner Core Bulb Head Handheld Cable; 48-53-2672 1/4" x 50' Inner Core Bulb Head Handheld Cable; 48-53-2561 5/16" x 25' Inner Core Bulb Head Handheld Cable; 48-53-2562 5/16" x 25' Inner Core Drop Head Handheld Cable; 48-53-2673 5/16" x 35' Inner Core Bulb Head Handheld Cable; 48-53-2674 5/16" x 50' Inner Core Bulb Head Handheld Cable; **48-53-2772** 5/16" x 75' Inner Core Drop Head Cable;

48-53-2676 3/8" x 25' Inner Core Handheld Cable;

48-53-2675 3/8" x 35' Inner Core Handheld Cable

RUST GUARD™ Plated Cable Attachments

Compatible with MILWAUKEE® Coupling Cables

48-53-2681 Small Bulb Head;

48-53-2682 Small Drop Head;

48-53-2683 1" Spade Bit;

48-53-2684 1" C-Cutter; **48-53-2685** 2" - 3" Head Attachment Kit;

48-53-2786 Medium Funnel Head:

48-53-2787 Medium Drop Head:

48-53-2788 1-1/2" Spade Bit;

48-53-2789 1-1/2" C-Cutter:

48-53-2790 2" - 3" Head Attachment Kit



M18™ Transfer Pump Kit

2771-21 (2771-20 Tool-Only)


Specifications:

| Gallons Per Hour | 480 |
|-----------------------------|-----------------------------|
| Gallons Per Battery (XC3.0) | 144 |
| Maximum Lift | 18' |
| Maximum Head Height | 75' |
| Self-Priming | Yes |
| Flexible Impeller | Yes |
| Fittings | 3/4" Brass Inlet and Outlet |
| Weight | 7.5 lbs |

Includes: (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack, (2) 3/4" Brass Fittings. Multi-Voltage Charger

M18 FUEL 16" Chainsaw Kit

2727-21HD (2727-20 Tool-Only) **Specifications:**



Length / Weight 33.0" / 13.9 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, 16" Oregon® Bar and Chain, Scrench, Scabbard, Rapid Charger



M18 FUEL String Trimmer Kit w/ QUIK-LOK™

2825-21ST (2825-20ST Tool-Only)

| Specifications: | | |
|-----------------|-----------------------|--|
| Cutting Swath | 14" - 16" | |
| Line Diameter | .080" / .095" | |
| RPM | 0 - 4,900 / 0 - 6,200 | |
| Trigger | Variable Speed | |
| Feed System | Bump Feed | |
| Length / Weight | 73.6" / 12.3 lbs | |

Includes: M18 FUEL™ Power Head w/ QUIK-LOK™, M18 FUEL™ QUIK-LOK™ String Trimmer Attachment, (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger





Pole Saw Kit w/ QUIK-LOK™

2825-21PS

Specifications:

| 1 11 141 | 0 1,000 |
|-----------------|------------------|
| Bar Length | 10" |
| Chain Gauge | .043" |
| Chain Pitch | 3/8" Low Profile |
| Length / Weight | 84.0" / 12.7 lbs |
| | |

Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Pack, M18 FUEL™ Power Head w/ QUIK-LOK™, M18 FUEL™ QUIK-LOK™ 10" Pole Saw Attachment, QUIK-LOK™ 3' Attachment Extension, Oregon® Bar and Chain, Scrench, Rapid Charger

QUIK-LOK™ Attachments

Compatible with M18 FUEL™ Power Head w/ QUIK-LOK™ (2825-20)

49-16-2717 M18 FUEL[™] String Trimmer Attachment;

49-16-2718 M18 FUEL™ Edger Attachment; 49-16-2719 M18 FUEL™ Articulating Hedge Trimmer Attachment; 49-16-2720 M18 FUEL™ 10" Pole Saw Attachment;

49-16-2721 M18 FUEL™ 3' Attachment Extension



M18™ Brushless **String Trimmer Kit**

2828-21 (2828-20 Tool-Only)

Specifications:

| Cutting Swath | 14" – 16" |
|-----------------|-----------------------|
| Line Diameter | .080" / .095" |
| RPM | 0 - 4,600 / 0 - 6,200 |
| Trigger | Variable Speed |
| Feed System | Bump Feed |
| Length / Weight | 73.6" / 11.5 lbs |

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Pack, Multi-Voltage Charger

M18 FUEL

Hedge Trimmer Kit

2726-21HD (2726-20 Tool-Only)

Specifications:

| Blade Length | 24" |
|-----------------|------------------|
| Cut Capacity | 3/4" |
| SPM | 3,400 |
| Gear Case | All Metal |
| Length / Weight | 45.5" / 11.1 lbs |
| | |

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Scabbard, Rapid Charger

M18™ SWITCH TANK™ 4-Gallon **Backpack Sprayer Kit**

2820-21PS (2820-20PS Tool-Only)

Specifications:

| • | |
|-----------------|------------------------|
| Tank Capacity | 4-Gallon |
| Pump Type | Dual Diaphragm Pump |
| PSI Range | 20 - 120 PSI (5 Modes) |
| Spray Distance | Up to 25' |
| Flow Rate Range | 0.10 - 0.51 Gal/Min |
| Dry Weight | 18.3 lbs |

Includes: M18™ SWITCH TANK™ Powered Base, SWITCH TANK™ 4-Gallon Sprayer Tank Assembly, (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, Adjustable Nozzle, Fan Nozzle, Multi-Voltage Charger

Related Accessories:

49-16-28WS SWITCH TANK™ 4-Gallon Water Supply Tank Assembly; **49-16-28CS** SWITCH TANK[™] 4-Gallon Concrete Sprayer Tank Assembly;

49-16-28PS SWITCH TANK™ 4-Gallon Sprayer Tank Assembly



M18 FUEL **Blower Kit**

2724-21HD (2724-20 Tool-Only)

Specifications:

| Max Air Volume | 450 CFM |
|-------------------|-----------------|
| Max Air Speed | 120 MPH |
| Noise Rating (db) | 62 (ANSI B175) |
| Lock On Button | Yes |
| Length / Weight | 36.9" / 7.3 lbs |

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger







M18™ ROCKET™ Dual Pack **Tower Light w/ ONE-KEY™ Kit**

2120-22HD (2120-20 Tool-Only)

Specifications:

| Lumens | 5,400 / 3,100 / 1,600 (Customizable) |
|---------------------|---|
| Modes | High, Medium, Low |
| Water & Dust Rating | IP67 |
| Height | 22" Collapsed, 5'5" Fully Extended |
| Weight | 8.2 lbs |
| | |

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs, Shoulder Strap, Rapid Charger



M18™ RADIUS™ Site **Light/Charger w/ ONE-KEY™**

2150-20 Tool-Only Specifications:

| opoomoutione. | |
|---------------------|---|
| Lumens | 9,000 / 4,800 / 2,500 (Customizable) |
| Modes | High, Medium, Low |
| Water & Dust Rating | IP54 |
| Height / Weight | 29.5" / 27.1 lbs |

Battery and Charger Sold Separately





CHARGES





M18™ RADIUS™ Site Light

2151-20 Tool-Only

Specifications:

| Lumens | 9,000 / 4,800 / 2,500 |
|-----------------|-----------------------|
| Modes | High, Medium, Low |
| Height / Weight | 29.5" / 23.2 lbs |
| | |

Battery and Charger Sold Separately









M18™ RADIUS™ Compact Site Light w/ ONE-KEY™

2146-20 Tool-Only

Specifications:

| -p | |
|------------------------|---|
| Lumens | 4,400 / 2,100 / 1,000 (Customizable) |
| Modes | High, Medium, Low |
| Water & Dust Rating | IP54 |
| Hands-Free | Self-Centering Metal Hook |
| Daisy Chain Compatible | Yes |
| Weight | 10.6 lbs |

Battery and Charger Sold Separately

Includes: Security Cable; 2147-20 Equipped with NEPA L5-20 Twistlock Outlets Also Available



POWERED BY

USB

CHARGES

M18™ ROCKET™ Tower Light/Charger Kit

Charges M18™ Batteries and USB

40" Collapsed, 7' Fully Extended

6,000 / 3,200 / 1,700

High, Medium, Low

Devices

21 lbs

Includes: (1) M18™ REDLITHIUM™

HIGH OUTPUT™ XC8.0 Battery Pack, M18™ ROCKET™ Tower Light Carry Bag

M18™ ROCKET™ Dual Power

2136-21 (2136-20 Tool-Only)

Specifications:

Battery Charger

Lumens Modes

Height

Weight

Tower Light 2131-20 Tool-Only Specifications:

| specifications: | |
|-----------------|----------------------------------|
| Lumens | 2,500 / 1,100 / 700 |
| Modes | High, Medium, Low |
| Height | 40" Collapsed, 7' Fully Extended |
| Weight | 15.3 lbs |

Battery and Charger Sold Separately



POWERED BY



M18™ RADIUS™ **Compact Site Light** 2145-20 Tool-Only

Specifications:

| Lumens | 4,400 / 2,100 / 1,000 |
|------------------------|---------------------------|
| Modes | High, Medium, Low |
| Water & Dust Rating | IP54 |
| Hands-Free | Self-Centering Metal Hook |
| Daisy Chain Compatible | Yes |
| Weight | 10.6 lbs |
| | |

Battery and Charger Sold Separately Includes: Security Cable





Specifications:



Battery and Charger Sold Separately



M18™ ROVER™ Flood Light

2361-20 Tool-Only

Specifications:

| Lumens | 1,500 / 780 |
|---------------------|----------------|
| Modes | High, Low |
| Water & Dust Rating | IP54 |
| Hands-Free | (1) EMT Hanger |
| Length / Weight | 8.8" / 3.1 lbs |
| | |

Battery and Charger Sold Separately



M18™ PACKOUT™ **Light/Charger**

2357-20 Tool-Only

Specifications:

| Lumens | 3,000 / 1,500 / 1,000 |
|-------------------|----------------------------|
| Modes | High, Medium, Low |
| Battery Charger | Charges all M18™ Batteries |
| USB Charging Port | 2.1A USB Charging Port |
| Device Storage | Weather Sealed |

Battery and Charger Sold Separately







2365-20 Tool-Only

M18™ ROVER™

Specifications:

| | Lumens | 1,500 / 650 / 300 |
|--|---------------------|---|
| | Modes | High, Medium, Low |
| | Water & Dust Rating | IP54 |
| | Rotating Head | Horizontal and Vertical |
| | Hands-Free | Integrated Magnet, Spring Loaded Clamp |
| | Length / Weight | 6.3" / 3.2 lbs |

Mounting Flood Light

Battery and Charger Sold Separately



M18™ Stick Light 2352-20 Tool-Only

Specifications:

| Lumens | 300 / 150 |
|---------------------|-------------------------|
| Modes | High, Low |
| Water & Dust Rating | IP54 |
| Pivoting Head | 45° |
| Hands-Free | 2 Stainless Steel Hooks |
| Length / Weight | 11.6" / 1.1 lbs |

Battery and Charger Sold Separately



M18™ ROVER™ **Dual Power Flood Light**

2366-20 Tool-Only

Specifications:

| Lumens | 4,000 / 2,000 / 1,200 |
|-----------------|-----------------------|
| Modes | High, Medium, Low |
| Hands-Free | Keyholes for Hanging |
| Length / Weight | 9.7" / 5.8 lbs |

Battery and Charger Sold Separately



POWERED BY

M18[™] Trouble Light w/ USB Charging

2363-20 Tool-Only

Specifications:

| Lumens | 700 / 350 / 70 / 700 |
|---------------------|--|
| Modes | High, Medium, Low, Strobe |
| Run-Time | Up to 100 Hours |
| Beam Pattern | Adjustable Task – Area |
| Water & Dust Rating | IPX4 |
| Hands-Free | 2 Stainless Steel Hooks |
| USB Charger | 2.1A USB Charging Port for External Devices |
| Length / Weight | 11.5" / 1.2 lbs |









M18™ Search Light Kit

2354-21 (2354-20 Tool-Only)

Specifications:

| Lumens | 1,250 / 1,200 / 600 / 1,200 |
|---------------------|------------------------------------|
| Modes | Spot/Flood, Flood, Spot, Strobe |
| Beam Distance | 730 yd / 668 m |
| Water & Dust Rating | IP54 |
| Head Rotation | 198° |
| Length / Weight | 11.5" / 3.1 lbs |
| | |

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Shoulder Strap, Multi-Voltage Charger

M18™ Jobsite Fan

0886-20 Tool-Only

Specifications:

| Max Air Flow | 284 CFMs (18 MPH) | |
|-------------------------------------|-----------------------|--|
| RPM (3 Settings) | 1,370 / 1,900 / 2,350 | |
| Length / Weight | 10.3" / 5.2 lbs | |
| Battery and Charger Sold Separately | | |

3-in-1 Backpack Vacuum Kit

55 CFM

75" H₂O

20 min

1 Gallon

15.6 lbs

Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™]

Wand, Flexible Hose, HEPA Filter, Crevice Tool, Dust

Extraction Adapter and Floor Tool, Rapid Charger

1-7/8"

XC8.0 Battery Pack, Telescoping Extension

Related Accessories:

49-90-1964 9' Hose Accessory

49-90-1963 HEPA Filter:

Includes: AC Adapter

M18 FUEL

Specifications:

Air Volume Sealed Suction

Run-Time

(w/ M18™

Capacity

Weight

HIGH OUTPUT™

XC8.0 Battery)

Inlet Diameter

0885-21HD (0885-20 Tool-Only)



M18™ Utility Bucket Light Kit

2122-22HD, 2122-21HD (2122-20 Tool-Only)

Specifications:

| Opeomodions. | | |
|---------------------|--|--|
| Lumens | 2,500 / 2,200 / 800 | |
| Modes | Flood, Spot/Flood, Spot | |
| Hands-Free | Patented Spring-Loaded Bucket Clamp | |
| Water & Dust Rating | IP56 | |
| Length / Weight | 13.8" / 8.3 lbs | |

Includes: 2122-22HD (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Packs;

2122-21HD (1) M18™ REDLITHIUM™ HIGH OUTPÙT™ XC8.0 Pack;



All Kits Include: Rapid Charger, Storage Bag

M18™ Work Light

2735-20 Tool-Only

0884-20 Tool-Only

Max Air Volume

Max Air Speed

Switch

73

Specifications:

Specifications:

| 100 |
|-----------------|
| Integrated Hook |
| 90° |
| |

Battery and Charger Sold Separately

M18™ Compact Blower

Length / Weight 20.5" / 2.6 lbs Battery and Charger Sold Separately

100 CFM

160 MPH

3-Speed Electronic

Includes: Flexible Nozzle, 9" Extension, Universal Inflator/Deflator





0882-20 Tool-Only

Specifications:

| Air Volume | 40 CFM |
|--|----------------------|
| Sealed Suction | 38" H ₂ O |
| Run-Time (w/ M18 [™] XC5.0 Battery) | 25 min |
| Capacity | 36 oz |
| Inlet Diameter | 1-1/4" |
| \Maiabt | 4.2 lbo |

Battery and Charger Sold Separately

Includes: 4' Flexible Hose, (2) Extension Tools, Crevice Tool, Floor Tool, Removable HEPA Filter

Related Accessories:

49-90-1951 HEPA Filter (2 pk); 49-90-2017 1-1/4" Round Brush Tool;

49-90-2018 Vacuum Power Tool Adapter











M18™ Compact Vacuum

| Air Volume | 40 CFM |
|--|----------------------|
| Sealed Suction | 38" H ₂ O |
| Run-Time (w/ M18 [™] XC5.0 Battery) | 25 min |
| Capacity | 36 oz |
| Inlet Diameter | 1-1/4" |
| Weight | 4.3 lbs |
| | |

HEPA





Battery and Charger Sold Separately

Includes: HEPA Filter, 6' Flexible Hose, Crevice Tool, Utility Nozzle **Related Accessories:**

49-90-2015 Foam Wet Filter;

49-90-2017 1-1/4" Round Brush Tool;

Compact Vacuum

0940-20 Tool-Only

Specifications:

| Air Volume | 32 CFM | |
|------------------|----------------------|--------------|
| Sealed Suction | 80" H ₂ O | |
| Run-Time (w/ M18 | ™ XC5.0 Battery) | Up to 28 Min |
| Capacity | | 2.5 Gallon |
| Inlet Diameter | | 1-1/4" |
| Weight | | 4.4 lbs |

Battery and Charger Sold Separately

Includes: Powered Floor Tool, Floor Tool, HEPA Filter, Foam Pre-Filter, Extension Wand, 6' Flexible Hose, Accessory Holder, Brush Tool, Utility Tool, Crevice Tool

Related Accessory: 49-90-2012 HEPA Filter

M18 FUEL PACKOUT™ 2.5 Gal **Wet/Dry Vacuum**

0970-20 Tool-Only

Specifications:

| Air Volume | 55 CFM |
|--|----------------------|
| | |
| Sealed Suction | 47" H ₂ O |
| Run-Time (w/ M18™ HIGH OUTPUT™ XC8.0 Battery) | Up to 50 Min |
| Capacity | 2.5 Gallon |
| Inlet Diameter | 1-1/4" |
| Weight | 11.3 lbs |

Includes: HEPA Filter, 6' Flexible Hose, Utility Nozzle, Crevice Tool, Vacuum Power Tool Adapter

Related Accessories: 49-90-1900 HEPA Filter

49-90-2015 Foam Wet Filter; 49-90-2016 3 pk Fleece Dust Bags; 49-90-2017 1-1/4" Round Brush Tool;



M18™ Wet/Dry Vacuum

0880-20 Tool-Only

Specifications:

| | Air Volume | 45 CFM |
|---|--|----------------------|
| | Sealed Suction | 47" H ₂ O |
| | Run-Time (w/ M18™ HD9.0 Battery) | 30 min |
| | Capacity | 2 Gallons |
| | Inlet Diameter | 1-1/4" |
| ' | Weight | 11.3 lbs |

49-90-1900 HEPA Filter

49-90-2018 Vacuum Power Tool Adapter

M18[™] PACKOUT[™] Radio + Charger

2950-20 Tool-Only

Specifications:



Battery Sold Separately

HEPA FILTER

HEPA FILTER

HEPA

Includes: 3.2 mm Auxiliary Input Cord, (2) AAA Batteries (For Memory Backup)





Bluetoot





M18™ Jobsite Radio/Charger

2792-20 Tool-Only

Specifications:

| Modes | AM, FM, AUX, Bluetooth® |
|-------------------|---|
| Battery Charger | Charges all M18™ Batteries |
| Bluetooth® Range | 100 ft |
| USB Charging Port | 2.1A USB Charging Port for External Devices |
| Device Storage | Weather Sealed Auxiliary Compartment |



Battery Sold Separately

Includes: 3.2 mm Auxiliary Input Cord, (2) AAA Batteries (For Memory Backup)









M18™ Jobsite Radio

2890-20 Tool-Only

Specifications:

| Modes | AM, FM, AUX |
|-------------------|---|
| USB Charging Port | 2.1A USB Charging Port for External Devices |
| Device Storage | Weather Sealed Auxiliary Compartment |

Battery and Charger Sold Separately

Includes: 3.2 mm Auxiliary Input Cord, (2) AAA Batteries (For Memory Backup)

CHARGES



POWERED BY

M18™ / M12™ Wireless Jobsite Speaker 2891-20 Tool-Only

Specifications:

Modes Bluetooth®, AUX

| | (Cable Not Included) |
|-------------------|--|
| Bluetooth® Range | 100 ft |
| USB Charging Port | 2.1A USB Charging Port for External Devices |
| | |

Battery and Charger Sold Separately

Includes: AC Adapter

CHARGES POWERED BY









74




M18™ Power Source

49-24-2371

Specifications:

| USB Charging Port | 2.1A USB Charging Port for External Devices |
|-------------------|---|
| Run-Time | Up to 18 Hours |
| Powered By | All M18™ Batteries |



Powers all MILWAUKEE® M12™ Heated Gear





M18™ TOP-OFF™ **175W Power Supply**

2846-20 Tool Only

Specifications:

| Continuous Watts | 175W |
|------------------|--------------------------------------|
| Power Source | Any M18™ Battery |
| DC Output | (1) USB-A Port, (1) USB-C PD Port |
| AC Output | (1) AC Outlet |

Battery Sold Separately

M18™ REDLITHIUM™ **HIGH OUTPUT™ HD12.0** System Starter Kit

48-59-1200

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Rapid Charger



DLITHIUM`

M18™ REDLITHIUM™ **HIGH OUTPUT™ XC8.0 System Starter Kit** 48-59-1880

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger



M18™ REDLITHIUM™ XC5.0 System Starter Kit

48-59-1850

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger



48-59-1835

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Pack, Multi-Voltage Charger





M18[™] & M12[™] Super Charger

48-59-1811

| Specifications: | |
|-----------------------------|---|
| Compatibility | All M18™ and M12™ Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| Charge Speed | Charges up to 4X Faster, Charges All HIGH OUTPUT™ Batteries in One Hour Or Less |
| On-Board Indicator Light | Yes |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |
| Batteries Sold Separately | |

M18™ Six-Pack **Sequential Charger** 48-59-1806

Specifications:

| • | |
|-------------------------|--|
| Compatibility | All M18™ Batteries |
| Charge Sequence | Sequential (Counter-Clockwise Rotation) |
| Skip Button | Manually Designate which Battery Charges First |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |
| Pass-Through Plug | Vos |

Batteries Sold Separately Pass-Through Plug

M18™ & M12™ Rapid Charge Station

48-59-1807

| Specifications: | |
|-------------------------|---|
| Compatibility | All M18™ and M12™ Batteries |
| Charge Sequence | Charges 3 Batteries Simultaneously |
| Charge Speed | Charges Individual Batteries up to 40% Faster |
| Capacity | Holds (3) M18 [™] and (3) M12 [™] Batteries |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |
| Pass-Through Plug | Yes |

Pass-Through Plug

Batteries Sold Separately

M18[™] Dual Bay Simultaneous **Rapid Charger**

48-59-1802

Specifications:


| | The state of the s |
|-----------------------|--|
| Compatibility | All M18™ Batteries |
| Charge Sequence | Simultaneous |
| Charge Speed | Charges Individual Batteries up to 40% Faster |
| Integrated Hang-Holes | Yes |
| | |

Batteries Sold Separately

M18™ & M12™ Rapid Charger

48-59-1808

| Specifications: | |
|--------------------------|--|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| Charge Speed | Charges Individual Batteries up to 40% Faster |
| On-Board Indicator Light | Yes |
| Integrated Hang-Holes | Yes |
| Cell Voltage Monitoring | Yes |



M18™ & M12™ **Multi-Voltage Charger**

48-59-1812

Specifications:

| Specifications. | |
|---------------------------|--|
| Compatibility | All M18 [™] and M12 [™] Batteries |
| Charge Sequence | Sequential (First In, First Charged) |
| Integrated Hang-Holes | Yes |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| Batteries Sold Separately | |



M18™ & M12™ Vehicle Charger

48-59-1810

Specifications:

| Compatibility | All M18™ and M12™ Batteries |
|--------------------------|---|
| Charge Sequence | Sequential (First In, First Charged) |
| On-Board Indicator Light | Yes |
| Cell Voltage Monitoring | Yes |
| | |

Batteries Sold Separately















XC

HIGH OUTPUT 48-11-1865 48-11-1862

More power and run-time

great performance for

all demands



48-11-1850 M18™ REDLITHIUM® XC5.0 Battery Pack

HIGH OUTPUT™ XC6.0

Battery Pack







48-11-1852

48-11-1851





HIGH OUTPUT













MILWAUKEE® is committed to improving productivity by providing performance-driven and trade-focused solutions so users can perform an entire day's work on one battery system. *Due to the physical size increase of the M18" REDLITHIUM" HIGH OUTPUT" HD12.0, it does not fit the following tools prior to a 6/1/2018 manufacturing date without applicable service part: 2787-20, 2788-20, 2771-20, 2122-20, 2130-20, 2135-20, 2361-20, 2145-20, 2146-20, 2360-20. MILWAUKEE* is committed to protecting end user's investments, offering FREE service upgrades for the listed products to any customer that purchases a HIGH OUTPUT" HD12.0 battery pack (starting summer 2018 you will be able to visit eService to request your service upgrade).



3 – 4 PIECE KITS LARGE KITS 2998-25 2696-26 2997-27 695-15R 2695-22 2992-22 2999-22 2896-22 2998-23 2694-24 2695-24 2696-24 **M18**[™] **COMBO KITS** Kit Tool Total 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 3 4 4 5 6 7 15 M18 FUEL™ 1/2" Hammer Drill/Driver w/ ONE-KEY™ M18 FUEL™ 1/2" Hammer Drill/Driver M18™ 1/2" Brushless Hammer Drill/Driver M18™ 1/2" Compact Hammer Drill/Driver M18™ 1/2" Compact Brushless Drill/Driver M18[™] 1/2" Compact Drill/Driver M18[™] 3/8" Right Angle Drill/Driver M18 FUEL™ Drywall Screw Gun M18 FUEL™ 1/4" Hex Impact Driver w/ ONE-KEY™ M18 FUEL™ SURGE™ 1/4" Hex Hydraulic Driver M18 FUEL™ 1/4" Hex Impact Driver M18[™] 1/4" Hex Brushless Impact Driver M18[™] Brushless 1/4" Hex 3-Speed Impact Driver M18™ 1/4" Hex Impact Driver* M18™ 5/8" SDS Plus Rotary Hammer M18 FUEL™ 1/2" Mid-Torque Impact Wrench w/ Friction Ring M18[™] 1/2" High Torque Impact Wrench M18[™] 1/2" Compact Impact Wrench M18 FUEL™ SAWZALL® Reciprocating Saw M18™ SAWZALL® Reciprocating Saw M18[™] HACKZALL[®] One-Handed Reciprocating Saw M18 FUEL™ 6-1/2" Circular Saw M18[™] 6-1/2" Circular Saw M18™ Brushless 7-1/4" Circular Saw M18™ Multi-Tool M18™ Band Saw M18™ Jobsite Radio M18 FUEL™ 4-1/2" / 5" Grinder Paddle Switch, No-Lock M18[™] 4-1/2" Cut-Off / Grinder M18[™] Compact Blower M18™ Wet/Dry Vacuum M18™ Work Light M18[™] and M12[™] Multi-Voltage Charger M18[™] Six-Pack Sequential Charger M18™ REDLITHIUM™ CP1.5 Battery Pack M18™ REDLITHIUM™ CP2.0 Battery Pack M18™ REDLITHIUM™ XC3.0 Battery Pack 2 2 2 2 2 M18™ REDLITHIUM™ XC4.0 Battery Pack M18™ REDLITHIUM™ XC5.0 Battery Pack 2 2 2 2 2 Carrying Case **Contractor Bag** 2 3

*M18[™] 1/4" Hex Impact Driver is the single, variable speed model
















EQUIPMENT REDEFINED TRADE FOCUSED SYSTEM WIDE





ALL MX FUEL BATTERIES FIT ALL MX FUEL EQUIPMENT



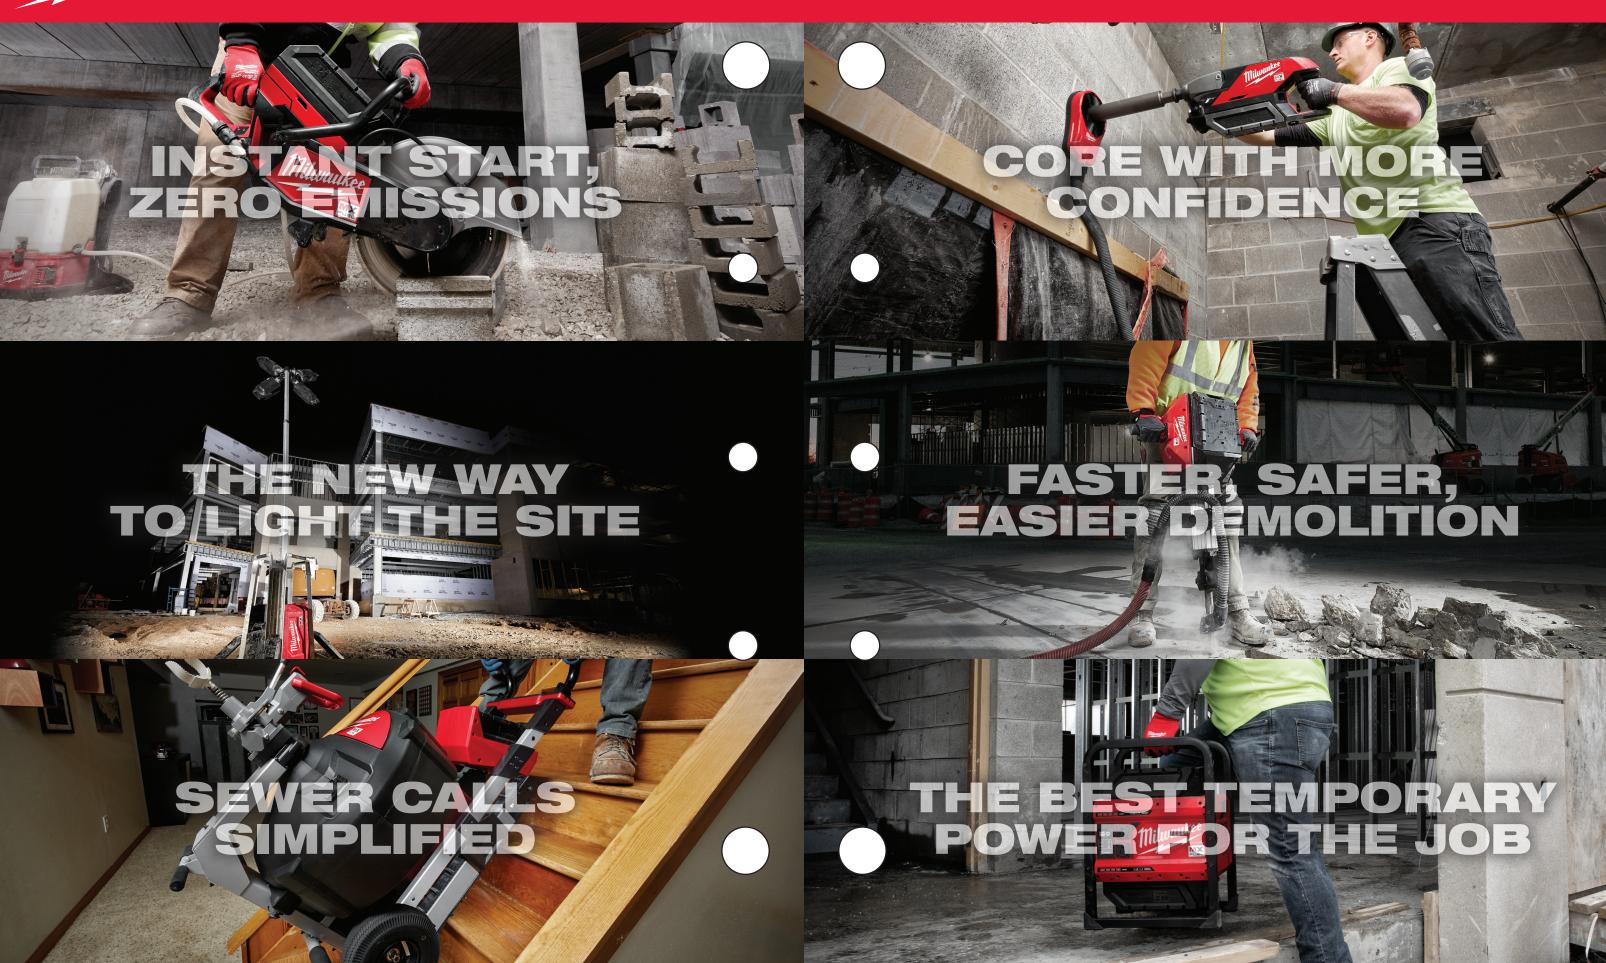



EQUIPMENT REDEFINED.

The MX FUEL™ Equipment System revolutionizes the light equipment market by delivering the performance, run-time and durability demanded by the trades without the hazards associated with emissions, noise, vibration and the frustrations of gas maintenance. This completely compatible system goes beyond the limitations of gasoline and power cord units, utilizing the industry's most advanced batteries, motors and electronics to deliver a best-in-class experience for users. This is Equipment Redefined.

REDLITHIUM™ BATTERY PACK

- Industry Leader in LITHIUM-ION Technology
- Patented Designs Protect Against Drops, Water and Harsh Environments
- Robust Electronics Optimize Performance for Every Equipment and Battery Combination





- Most Advanced System of Equipment Electronics in the Industry
- Protects Equipment with Best-In-Class Thermal and Overload Monitoring
- Delivers In-Application Communication, Optimizing Equipment Performance













 Optimized for the Perfect Combination of Performance, Portability and Productivity
 Built with Maximum Copper Content and Top-Grade Rare Earth Magnets



EQUIPMENT REDEFINED TRADE FOCUSED SYSTEM WIDE

MX FUEL™ 14" Cut-Off Saw Kit



MXF314-2XC



| specifications: | |
|-------------------------|-------------------------------------|
| Blade Diameter | 14" |
| Cut Depth | 5" |
| Blade Arbor | 1" / 20 mm |
| RPM | 5,350 |
| On-Board Water Delivery | Yes |
| Weight w/ Battery | 32.1 lbs |
| Push Button Start | Yes |
| ONE-KEY™ Compatible | Track and Manage |
| Battery Compatibility | Fits All MX FUEL™ Battery Packs |
| Warranty | 2 Year Equipment, Battery & Charger |
| | |

Includes: (2) MX FUEL™ REDLITHIUM™ XC406 Battery Packs, MX FUEL™ Charger, Wrench, Hex Key, Quick Connect, Contractor Bag

Available Accessories:

49-94-1475

14" x 1/8" x 1" Cutting Wheel 49-93-7540

14" Diamond Ultra Segmented



Additional Equipment: (Not Included)

14" Cut-Off Saw Cart

2820-21WS M18™ SWITCH TANK™ 4-Gallon Backpack Water Supply Kit



MX FUEL™ Handheld Core Drill Kit w/ Stand




MXF301-2CXS

Specifications:

| - | | Par Par |
|----------------------------------|------------------|----------------------------|
| Maximum Bit Capacity | 6" | A T |
| RPMs Low / High | 790 / 1,550 | |
| Spindle Size | 1-1/4" – 7 | |
| Wet / Dry Coring | Both | |
| On-Board Water Delivery | Yes | |
| Stand Included | Yes | |
| Weight: Machine w/ CP Battery | 21.6 lbs | |
| Weight: Stand Only | 29.0 lbs | |
| Push Button Start | Yes | |
| ONE-KEY™ Compatible | Track and Mana | ige |
| Battery Compatibility | Fits All MX FUEL | [™] Battery Packs |
| Warranty | 2 Year Equipme | nt, Battery & Charger |
| | | |

Includes: (2) MX FUEL™ REDLITHIUM™ XC406 Battery Packs. MX FUEL™ Charger, Compact Core Drill Stand, Trigger Lock, 5/8" – 11 Bit Adapter, Quick Connect, Hard Case with Wheels

MX FUEL™ Breaker Kit

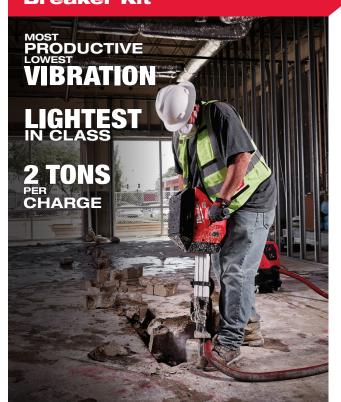

MXF368-1XC **Specifications:** Chuck Size 1-1/8" Hex Blows per Minute 1,300 Impact Energy (ft/lbs) 50 4.9 m/s² Vibration Soft Start Yes 63.9 lbs Weight w/ Battery Push Button Start Yes ONE-KEY™ Compatible Track and Manage **Battery Compatibility** Fits All MX FUEL™ Battery Packs

Includes: (1) MX FUEL™ REDLITHIUM™ XC406 Battery Pack, MX FUEL™ Charger, Cart, (3) Chisels

Available Accessories:

8960-20 **Dust Extractor**

5321-DE

Attachment

Dust Extraction

Warranty

48-62-4001 1-1/8" Hex 16" Moil Point

48-62-4006 1-1/8" Hex 16" Narrow Chisel

2 Year Equipment, Battery & Charger





MX FUEL™ Handheld Core Drill Kit



MXF301-2CP



Includes: (2) MX FUEL™ REDLITHIUM™ CP203 Battery Packs, MX FUEL™ Charger, Trigger Lock, 5/8" - 11 Bit Adapter, Quick Connect, Hard Case with Wheels

Available Accessories for MXF301-2CP & MXF301-2CXS: (Not Included)

2820-21WS

M18™ SWITCH TANK™ 4-Gallon Backpack Water Supply Kit

8960-20 Dust Extractor

5319-DE Dry Coring **Dust Extractor Attachment**

48-17-5030 3" Diamond Ultra Wet Core Bit

48-17-0130 3" Diamond Ultra Dry Core Bit





MXF002-2XC Specifications:

Peak Watts

| Running Watts | 1,800W |
|-----------------------|---------------------------------|
| Outlets | (2) 120V 15A Outlets |
| Inverter Output | Pure Sine Wave |
| Integrated Charger | Yes |
| Push Button Start | Yes |
| ONE-KEY™ Compatible | Track and Manage |
| Battery Compatibility | Fits All MX FUEL™ Battery Packs |
| | |

2 Year Equipment and Battery

3,600W

Includes: (2) MX FUEL™ REDLITHIUM™ XC406 Battery Packs, Detachable Charger Cord

MX FUEL™ Sewer Drum Machine w/ POWERTREDZ™ Kit



Cable Head

Attachments

48-53-2830 Straight Auger;

48-53-2831 Funnel Auger;

48-53-2832 3" Root Cutters;

48-53-2833 4" Root Cutters;

48-53-2834 6" Root Cutters; 48-53-2837 3" Grease Cutters;

48-53-2829 Pin Key;

48-53-2839 Case; 48-53-2840 9 pc Cable Head

Attachment Kit

48-53-2838 4" Grease Cutters;

48-53-2835 Small Opening Tool;

48-53-2836 Medium Opening Tool;

MXF501-1CP **Specifications:**

| Specifications. | | |
|---------------------------------|-------------------------------------|---------|
| Drain Line Capacity | 3" - 8" up to 200' | Minutes |
| Drum Capacity | 100' | |
| Cable Capacity | 5/8" and 3/4" | |
| Powered Cable Feed & Retract | Yes, CABLE DRIVE™ | |
| Cable Spin Speed | 200 RPM | ~ |
| Height / Length | 47" / 32.5" | |
| Weight w/ Battery | 125 lbs | |
| Lift Assist | Yes, POWERTRE | DZ™ |
| Push Button Start | Yes | |
| ONE-KEY™ Compatible | Track and Manag | је |
| Battery Compatibility | Fits All MX FUEL™ Battery Packs | |
| Warranty | 2 Year Equipment, Battery & Charger | |

Includes: (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, 3/4" Anchor Cable

MX FUEL™ Sewer Drum Machine Accessories

Compatible with MXF501-1CP, MXF500-1CP

Machine Accessories 47-53-5001 6-1/2" Guide Hose; 47-53-5002 Load Wheel

5/8" Inner **Core Cables 48-53-2325** - 25' 48-53-2350 - 50';

48-53-2310 - 100' 3/4" Inner **Core Cables**

48-53-2425 - 25'; 48-53-2450 - 50'; 48-53-2410 - 100'

87

Leader Cables & Anchor Cable

48-53-2802 Leader Cable; 48-53-2902 Leader Cable; 48-53-2905 Anchor Cable

Also Available:

MX FUEL™ Sewer Drum Machine Kit MXF500-1CP

Specifications:

| Specifications. | |
|---------------------------------|-------------------------------------|
| Drain Line Capacity | 3" – 8" up to 200' |
| Drum Capacity | 100' |
| Cable Capacity | 5/8" and 3/4" |
| Powered Cable Feed & Retract | Yes, CABLE DRIVE™ |
| Cable Spin Speed | 200 RPM |
| Height / Length | 47" / 32.5" |
| Weight w/ Battery | 110 lbs |
| Lift Assist | No |
| Push Button Start | Yes |
| ONE-KEY™ Compatible | Track and Manage |
| Battery Compatibility | Fits All MX FUEL™ Battery Packs |
| Warranty | 2 Year Equipment, Battery & Charger |

Includes: (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, 3/4" Anchor Cable

MX FUEL™ ROCKET™ Tower Light/Charger Kit



MXF041-1XC

Specifications:

| Max Lumens | 27,000 |
|-----------------------|------------------------------------|
| Modes | High / Medium / Low |
| Collapsed Height | 44" |
| Extended Height | 10' |
| Width | 20.8" |
| Depth | 24.8" |
| Weight w/ Battery | 110 lbs |
| Ingress Rating | Outdoor Use |
| Push Button Start | Yes |
| ONE-KEY™ Compatible | Customize. Track. Manage. |
| Battery Compatibility | Fits All MX FUEL™ Battery Packs |
| Warranty | 2 Year Equipment and Battery |
| | |

Includes: (1) MX FUEL™ REDLITHIUM

MX FUEL™ Batteries and Charger

MX FUEL™ REDLITHIUM" **CP203 Battery**

MXFCP203



| Compatibility | Fits All MX FUEL™ Equipment |
|-----------------------|-----------------------------|
| Charge Duration | 45 min |
| Capacity | 3.0 Ah |
| Fuel Gauge | Yes |
| REDLINK™ Intelligence | Yes |
| ONE-KEY™ Compatible | No |
| Warranty | 2 Year |

MX FUEL™ Charger

MXFC

| Specifications: | |
|-----------------------------|---|
| Compatibility | Charges All MX FUEL™ Batteries |
| Charge Speed | Charges MX FUEL™ CP203 Battery in 45 min |
| | Charges MX FUEL™ XC406 Battery in 90 min |
| REDLINK™ Intelligence | Yes |
| On-Board Fan | Yes |
| Cell Voltage Monitoring | Yes |
| On-Board Indicator Light | Yes |
| Warranty | 2 Year |
| | |

MX FUEL™ REDLITHIUM XC406 Battery

MXFXC406

Specifications:

| Compatibility | Fits All MX FUEL™ Equipment |
|-----------------------|-----------------------------|
| Charge Duration | 90 min |
| Capacity | 6.0 Ah |
| Fuel Gauge | Yes |
| REDLINK™ Intelligence | Yes |
| ONE-KEY™ Compatible | Yes |
| Warranty | 2 Year |

MX FUEL™ REDLITHIUM™ XC406 **Battery/Charger Expansion Kit**

Includes: (2) MX FUEL™ REDLITHIUM™ XC406 Battery Packs, MX FUEL™ Charger



PORTABLE POWER TOOL

LIMITED WARRANTY

Every MILWAUKEE **power tool*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on an electric power tool which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of five (5) years** after the date of purchase unless otherwise noted. Return of the power tool to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear. lack of maintenance, or accidents.

Normal Wear: Many power tools need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when normal use has exhausted the life of a part including, but not limited to, chucks, brushes, cords, saw shoes, blade clamps, o-rings, seals, bumpers, driver blades, pistons, strikers, lifters, and bumper cover washers

*This warranty does not cover Air Nailers & Staplers; Airless Paint Sprayer; Cordless Battery Packs; Gasoline Driven Portable Power Generators; Hand Tools; Hoist – Electric, Lever & Hand Chain; M12™ Heated Gear; Reconditioned Product; and Test & Measurement Products. There are separate and distinct warranties available for these products.

**The warranty period for Job Site Radios, M12™ Power Port, M18™ Power Source, Jobsite Fan and Trade Titan™ Industrial Work Carts is one (1) year from the date of purchase. The warranty period for the Drain Cleaning Cables and AIRSNAKE™ Drain Cleaning Air Gun Accessories is two (2) years from the date of purchase. The warranty period for the M18™ Compact Heat Gun, 8 Gallon Dust Extractor, M18™ Framing Nailers, M18 FUEL™ 1/2" Ext. Anvil Controlled Torque Impact Wrench w/ ONE-KEY™, and the M18 FUEL™ 1" High Torque Impact Wrench w/ ONE-KEY™ is three (3) years from the date of purchase. The warranty period for the LED in the LED Work Light and the LED Upgrade Bulb for the Work Light is the lifetime of the product subject to the limitations above. If during normal use the LED or LED Bulb fails, the part will be replaced free of charge.

Warranty Registration is not necessary to obtain the applicable warranty on a MILWAUKEE power tool product. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT, IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES. WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW. SUCH IMPLIED WARRANTIES ARE LIMITED. TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE, SOME STATES DO NOT ALLOW LIMITATIONS. ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and nonwarranty service on a Milwaukee electric power tool.

CORDLESS BATTERY PACK

LIMITED WARRANTY

Every MILWAUKEE Battery Pack (sold with cordless product and/or as a replacement battery pack) is warranted to the original purchaser only to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace a battery pack which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for the stated warranty period from date of purchase. Return of the battery pack to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800. SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

| Battery Pack Cat. No. | Chemistry | Warranty Period (from date of purchase) | |
|---|--|---|--|
| 48-11-1812 48-11-1828 (Serial number prefix "B41E" and later) 48-11-1840 48-11-1850 48-11-1865 48-11-1865 48-11-1890 48-11-2402 48-11-2440 48-11-2440 48-11-2430 (Serial number prefix "C71") | LITHIUM-ION | Three (3) Years | |
| 48-11-0490 48-11-1815 48-11-1820 48-11-1835 48-11-2001 48-11-2401 48-11-2420 48-11-2430 | LITHIUM-ION | Two (2) Years | |
| 48-11-1828 (Serial number prefix "B41D" and earlier) 48-11-1830 (Serial number prefix "A95") 48-11-2830 (Serial number prefix "A71") | LITHIUM-ION | Two (2) Years – plus, Three (3) Years Pro-Rata (prorated)* | |
| 48-11-0100 48-11-1024 48-11-1830 (Serial number prefix "E95") 48-11-1970 48-11-2230 | Nickel-Cadmium (Ni-Cd), Nickel-Metal- Hydride (Ni-MH), LITHIUM-ION | One (1) Year | |

*The warranty period for MILWAUKEE M18[™] 48-11-1828 (with the serial number prefix "B41D" and earlier), V18[™] 48-11-1830 (with the serial number prefix "A95"), and V28[™] 48-11-2830 (with the serial number prefix "A71") is five (5) years / 2000 charges from the date of purchase, whichever first occurs. The first 1000 charges or 2 years of the warranty, whichever first occurs, are covered through free replacement of the defective battery. This means that for the earlier of the first 1000 charges or two (2) years from the date of purchase/first charge, a replacement battery will be provided to the customer for any defective battery free of charge. Thereafter, the remaining charges up to a total of 2000 or the remainder of the five (5) year period from the date of purchase, whichever first occurs, will be covered on a pro rata basis. This means that every customer gets an additional 1000 charges or three (3) years of pro rata warranty on the

these battery packs, depending upon the amount of use. MILWAUKEE M18[™] 48-11-1828 (with the serial number prefix "B41E" and later), V18[™] 48-11-1830 (with the serial number prefix "E95"), and M28[™] 48-11-2830 (with the serial number prefix "C71") have different warranty periods, as listed.

Warranty Registration is not necessary to obtain the applicable warranty on a MILWAUKEE battery pack. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and non-warranty service on a MILWAUKEE Battery Pack.

HEATED GEAR

LIMITED WARRANTY

Every MILWAUKEE HEATED GEAR product (including its battery holder/controller) is warranted to the original purchaser only to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on a Heated Gear product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of one (1) year* after the date of purchase. Return of a Heated Gear product to a MILWAUKEE factory Service Center location, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE personnel, misuse, alterations, abuse, normal wear and tear, or accidents.

*This warranty does not cover a M12™ LITHIUM-ION Battery Pack, a M12™ Charger, or a REDLITHIUM™ USB battery; **there are separate and distinct warranties** available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT

APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE; TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location

OUTDOOR POWER EQUIPMENT

LIMITED WARRANTY

Every MILWAUKEE **Outdoor Power Equipment Product*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on an outdoor power equipment product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of three (3) years after the date of purchase unless otherwise noted. Return of the outdoor power equipment to a MILWAUKEE factory Service Center location or participating MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: Many outdoor power equipment products need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when normal use has exhausted the life of a part including, but not limited to trimmer head, trimmer head spool, cutting lines, blades, chains, blower tubes, brushes, o-rings, and seals.

*This warranty does not cover Cordless Battery Packs or Reconditioned Product. There are separate and distinct warranties available for these products.

**The warranty period for SWITCH TANK™ tank assemblies, hoses, handles, and wands are one (1) year from the date of purchase.

MILWAUKEE does not cover freight or labor charges associated with the inspection and testing of outdoor power equipment products which are found by MILWAUKEE not to be a valid warranty claim. A valid warranty claim must be substantiated by the discovery of defective material or workmanship by MILWAUKEE.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW. MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION. OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED

WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and nonwarranty service on a Milwaukee electric power tool.

REDLITHIUM USB LIMITED WARRANTY

Every MILWAUKEE **REDLITHIUM USB battery and charger*** is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace repair a REDLITHIUM USB battery or charger which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of **two (2) years** after the date of purchase unless otherwise noted. Return of the REDLITHIUM USB battery or charger to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800.SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: This warranty does not cover repair or replacement when normal use has exhausted the life of a part including, but not limited to charging cables, and wall plugs.

*This warranty does not cover any cordless product sold with the REDLITHIUM USB battery and/or charger. There are separate and distinct warranties available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location.

PERSONAL LIGHTING LIMITED LIFETIME WARRANTY

Every MILWAUKEE **Personal Lighting Product*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material

and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on a personal lighting product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for the lifetime of the personal lighting product. Return of the personal lighting product to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, accidents, or caused by alkaline batteries.

Normal Wear: This warranty does not cover repair or replacement when normal use has exhausted the life of a part including, but not limited to clips, straps, charging cables, wall plugs, and rubber gaskets. This warranty does cover the **LED** in the personal lighting products, subject to the limitations herein

*This warranty does not cover Cordless Battery Packs or Chargers. There are separate and distinct warranties available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS. ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES. WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the **'Service Center Search'** in the **Parts & Service** section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location.

MX FUEL™ PRODUCT, BATTERY PACKS, AND CHARGERS LIMITED WARRANTY

Every MILWAUKEE **MX FUEL™ Product, battery pack, and charger** is warranted to the **original purchaser** only to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace a MX FUEL™ product, battery pack, or charger which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of two (2) years after the date of purchase. Return of the MX FUEL™ product, battery pack, or charger to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800. SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: Many MX FUEL™ products need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when

normal use has exhausted the life of a part including, but not limited to, assist & drive belts, pulleys, blade flanges, vacuum gaskets, tool free handles, set pins, skis, drive couplers, rubber boots, auto feed, stabilize blocks, wheels, carrier wheels, cords, o-rings, seals, bumpers, driver blades, pistons, strikers, lifters, tool holder, and bumper cover washers.

Warranty Registration is not necessary to obtain the applicable warranty on a MX FUEL™ product, battery pack, or charger.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION. YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE; TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and non-warranty service on a MX FUEL™ product, battery pack or charger.



LIGHTNING MAX REPAIR

MILWAUKEE® understands the unpredictability of the jobsite and the need for fast, reliable repairs and replacements. Through our Lightning Max Repair Program we are committed to providing you the best service so you can minimize downtime and get the job done.

SPEED: Repair of your tool in 7 – 10 days

PAY LESS, NOT MORE: Guaranteed to never pay more than the quoted Lightning Max Repair price

RELIABILITY: All repairs are serviced by experienced, certified factory technicians

QUALITY: Only genuine MILWAUKEE® parts used

WHERE TO GO FOR LIGHTNING MAX REPAIRS

eSERVICE

Solution for quick, convenient repairs, best for smaller tool quantities.

- FedEx shipping to MILWAUKEE® repair facility
- Your tool returned directly to you no need to pick it up
- Go to www.milwaukeetool.com/eService

FACTORY SERVICE CENTERS

Factory Service Centers also carry the widest variety of MILWAUKEE® Tools and Accessories for all your needs. **1-800-SAWDUST (1-800-729-3878)**

Anaheim

1130 N Magnolia Anaheim, CA 92801

Atlanta

6155 Jimmy Carter Blvd Suite F2 Norcross, GA 30071

Boston

375 University Avenue Westwood, MA 02090

Chicago

6310 Gross Point Road Niles, IL 60714

Cleveland

8200 Sweet Valley Drive Valley View, OH 44125

Dallas

1625 W Mockingbird Ln Unit 205 Dallas, TX 75235

Denver

2500 W 8th Avenue, Unit E Denver, CO 80204

Houston

3566 West T.C. Jester Blvd Houston, TX 77018

Las Vegas

5580 S Decatur Blvd Unit 110 Las Vegas, NV 89118

Miami

3311 NW 82nd Avenue Miami, FL 33122

Minneapolis/St. Paul

9705 Valley View Road Eden Prairie, MN 55344

Milwaukee

13145 W Lisbon Road Brookfield, WI 53005

New York City

3068 Whitestone Expressway Flushing, NY 11354

Philadelphia

711 West Chester Pike Havertown, PA 19064

San Antonio

14329 San Pedro Avenue, Suite D San Antonio, TX 78232

San Diego

7849 - 7851 Clairemont Mesa Blvd. San Diego, CA 92111

San Francisco/Oakland

2341 Lincoln Avenue Hayward, CA 94545

Seattle

5963 Corson Avenue South Suite 104 Seattle, WA 98108

Washington D.C.

11900 Baltimore Ave Suite B Beltsville, MD 20705

CANADA

1-800-268-4015

Edmonton

14506 – 115th Avenue NW Edmonton AB T5M 3B9

Halifax

Unit 102 50 Akerley Blvd Dartmouth NS B3B 1R8

Saskatoon

Unit 630 3530 Millar Ave Saskatoon SK S7P 0B3

Vancouver

9000 Bill Fox Way, Unit 103A Burnaby BC V5J 5J3

Vaughan

140 Fernstaff Court, Unit 4 Vaughan ON L4K 3L8

Winnipeg

675 Berry St, Unit H Winnipeg MB R3H 1A7

