



DEDICATION TO THE TRADES

Since the company began in 1924, Milwaukee Tool has led the industry in both durability and performance. With an unwavering commitment to the trades, MILWAUKEE® continues to lead with a focus on providing innovative, cordless, trade-specific solutions. MILWAUKEE® is dedicated to delivering a steady stream of advanced solutions for the trades that offer increased productivity and unmatched durability.

GAME-CHANGING SOLUTIONS

At MILWAUKEE®, the phrase "good enough" doesn't exist in our vocabulary. Our goal is to solve problems in ways that have never been done before. The result: tools and equipment that offer unmatched levels of performance, productivity and durability.



BUILT ON THE BEST FOUNDATION



REDLITHIUM™ BATTERIES

They last longer, think faster and work harder than all other professional LITHIUM-ION batteries. Built to withstand even the harshest environments, REDLITHIUM™ Batteries deliver more work over the life of the battery, no matter what the job.



MILWAUKEE® HIGH PERFORMANCE

Highly advanced motor technology boosts efficiency, generating more power from a compact power source. That means the ultimate performance, durability and run-time comes in a smaller, lighter package.



REDLINK[™] INTELLIGENCI

An advanced combination of hardware and software, REDLINK™ Intelligence enables full-circle communication between our batteries and tools, allowing for unmatched levels of performance, protection and productivity.



USER-DRIVEN INNOVATIONS

Instead of making assumptions about what users need, we set out to deliver disruptive innovation by getting out on the jobsite, alongside trade professionals, to understand their challenges – the frustrations, needs, and previous limitations. We set out to completely rethink a solution with new-to-world technology and unparalleled levels of design and engineering. Whether it's bringing cordless power to traditionally corded or gas products and manual activities, or advances to fundamental tools and equipment, we are dedicated to improving workplace productivity and safety.



M18™ FORCE LOGIC™ Press Tool

THE SMALLEST. MOST **INTELLIGENT PRESS TOOL**

The M18™ FORCE LOGIC™ Press Tool is the industry's first in-line brushless press tool, delivering 20% more run-time per charge, 10% faster cycle time and the single longest calibration interval in the industry at 50,000 cycles, all in a solution that's 20% lighter than the leading competitor. The M18™ FORCE LOGIC™ Press Tool is compatible with over 13 unique fitting systems offering 1/2" to 4" capacity, providing the highest level of press accuracy and reliability to plumbers and mechanical contractors.



M12 FUEL™ 3/8" Digital Torque Wrench w/ ONE-KEY™

DELIVERS TORQUE **ACCURACY**

FASTER. MORE PRODUCTIVE

The M12 FUEL™ Digital Torque Wrench w/ ONE-KEY™ is the industry's first torque wrench with a motor, delivering increased productivity, precise torque accuracy, and user demanded reporting functionality. The torque wrench delivers up to 50% faster installation time, replacing the hand tool or two tool installation process and providing accuracy within 2% for torque critical fasteners. This battery powered torque wrench is equipped with MILWAUKEE® ONE-KEY™, giving you the power to record all the fasteners and produce a downloadable report via ONE-KEY™.




M18 FUEL™ 8-1/4" Table Saw w/ ONE-KEY™

15A POWER

241/2"

600 LFT PER CHARGE

The world's first 18V table saw, the M18 FUEL™ 8-1/4" Table Saw w/ ONE-KEY™ generates the power of a 15 amp corded saw. With a rip capacity up to 24-1/2" and a vertical capacity up to 2-1/2" to tackle 2x dimensional lumber, this saw boasts the impressive capacity that users have come to expect on a traditional corded table saw. Equipped with ONE-KEY™, users can also easily track, manage, and secure the table saw through the ONE-KEY[™] app on their phone.



THE EASIEST **WAY TO PUNCH**

The MILWAUKEE® Knockout System makes every step in the hole making process both faster and easier. The EXACT™ Punches and Dies are set up separate from the tool for extreme ease of use, utilizing a quick-connect alianment system that allows users to snap the tool onto the punches and dies without fighting against its weight and pull the trigger to punch the hole with ease.





M18 FUEL™ 7/16" Hex Utility High Torque Impact Wrench w/ ONE-KEY™

BUILT FOR MAXIMUM FASTEST MORE POWERFUL MAXIMUM CONTROL

Core for linemen, the MILWAUKEE® M18 FUEL™ 7/16" Hex Utility High Torque Impact Wrench w/ ONE-KEY™ was the first of its kind to be designed specifically for utility work. It delivers fastest drilling speed, more power, and is built for maximum control. It's equipped with exclusive features, such as an elongated handle built to fit comfortably in the user's hand while wearing high voltage safety gloves as well as a QUIK-LOK™ chuck, providing the industry's only one-handed bit changes.



M18 FUEL™ Pipe Threader w/ ONE-KEY™

AUTOSTOP™ SIDE-GRIP THREAD STARTS FASTER CONTROL

The M18 FUEL™ Pipe Threader w/ ONE-KEY™ revolutionizes pipe threading. Featuring AUTOSTOP™ kickback control, the tool protects against severe kickback. This, combined with the integrated side-grip for easier thread starts, delivers unrivaled tool control. The world's first cordless pipe threader, threads faster than corded alternatives and delivers unmatched productivity.



THE BEST 14" CUT-OFF **SAW EXPERIENCE**

FULL 14" FASTEST NO CUTS FROM GAS

The MX FUEL™ 14" Cut-Off Saw delivers the best 14" cut-off saw experience by providing full 14" capacity, fastest cuts from start to finish, and no gas headaches. By providing a 5" cut depth and eliminating the hassle of pull starts, the MX FUEL™ 14" Cut-Off Saw helps you maximize your productivity in every application. The MX FUEL™ REDLITHIUM™ Battery Pack provides instant power with less noise and vibration, and zero emissions for a safer workspace indoors or outdoors.





M18™ FORCE LOGIC™ 10,000 PSI Hydraulic Pump

THE EASIEST WAY **TO POWER HYDRAULICS**

The M18™ FORCE LOGIC™ 10,000 PSI Hydraulic Pump is designed to be fully compatible with all existing 10,000 PSI rated hydraulic hoses and heads. Delivering the easiest set-up, at up to 80% smaller and up to 75 lbs lighter than gas units, the pump can easily be carried by a single person. Delivering 3X the flow rate of competitive cordless pumps; 24-second cycle times and up to 60 presses on a single battery on 1590 ACSR connectors, the pump provides gas-like performance.

THE WORLD LEADER IN CORDLESS INNOVATION

Milwaukee Tool is committed to driving unrivaled performance and productivity for the professional trades through our groundbreaking developments in cordless technology.

Our leadership in cordless innovation has helped to shape the industry. We were the first to introduce LITHIUM-ION technology to power tools, and have achieved significant leaps forward in advanced motors, the most intelligent

REDLITHIUM BATTERIES

electronics, and connected tools.

This leadership allows us to continue providing a steady stream of solutions that exceed the demands of the trades.





ONETKEY

POWERSTATE BRUSHLESS MOTORS

HIGH PERFORMANCE

MILWAUKEE's high performance POWERSTATE™ Brushless Motors contain top-grade rare earth magnets and greater copper content, delivering more power and torque for superior application performance.

PURPOSE BUILT

Each motor is uniquely engineered for the demands of the tool.

Motor-optimization ensures the perfect combination of performance, portability and productivity.



POWERSTATE™ BRUSHLESS MOTORS



LIGHT APPLICATIONS

LONGER MORE MORE RUN-TIME

HEAVY APPLICATIONS

CELL TECHNOLOGY Not all batteries are created equal.

In our world-class battery lab, battery cells are engineered to deliver the highest performing packs on the jobsite.

PACK CONSTRUCTION

Unique patented designs protect every REDLITHIUM™ Battery, safeguarding your investment through drops, weather exposure, and harsh environments.

ROBUST ELECTRONICS

Innovative communication systems monitor cells, providing temperature and overload protection, while optimizing performance for every tool and battery combination.



RUN-TIME BATTERY LIFE



DURABILITY

Best-in-class thermal and overload monitoring protects tools in extreme jobsite conditions.


PRODUCTIVITY

Advanced communication features, such as DRIVE CONTROL™, allow users to quickly move from light to heavy applications with the touch of a button.

ONETKEY

Get more out of your tools and equipment than ever before with integrated tool tracking, security and customization. ONE-KEY™ combines smarter tools with the industry's only free-to-use inventory management program.



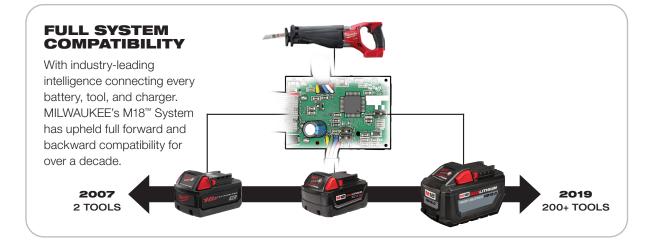





THE WORLD LEADER IN CORDLESS INNOVATION

ONETKEY

UNLOCKING THE DIGITAL JOBSITE



PORTABLE PRODUCTIVITY.

TRADE FOCUSED. SYSTEM WIDE.

Pages 9 - 32



PERFORMANCE DRIVEN.

TRADE FOCUSED. SYSTEM WIDE.

Pages 33 - 76



EQUIPMENT REDEFINED.

TRADE FOCUSED. SYSTEM WIDE.

Pages 77 - 86











See pages 16, 37, 39, 41 – 45, 49, 51, 57 – 60, 63 – 65, 69 and 83 – 86 for ONE-KEY™ Compatible Tools and Equipment



Apple, the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play and the Google Play logo are trademarks of Google Inc

FREE APP NOW!

















PORTABLE PRODUCTIVITY TRADE FOCUSED SYSTEM WIDE





ALL M12 TOOLS FIT M12 BATTERIES

100+ TOOLS



DRIVEN TO OUTPERFORM.

M12 FUEL™ is engineered for the most demanding tradesmen in the world.

M12 FUEL™ delivers unrivaled performance in a compact structure and features three MILWAUKEE® exclusive innovations – the POWERSTATE™ Brushless Motor, REDLITHIUM™ Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software – that deliver unmatched power, run-time and durability.

Simply put, M12 FUEL™ is best-in-class, full-circle technology that drives, protects and powers your cordless tools beyond the rest.



LONGER MORE MORE RUN-TIME



POWERSTATE™ BRUSHLESS MOTOR

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors
- Up to 10X Longer Motor Life





PREDLINK PLUST INTELLIGENCE

- Most Advanced Electronic System on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life
- Built-In Fuel Gauge Displays Remaining Charge



REDLITHIUM CP2.0 & XC4.0 BATTERY PACKS

- Up to 2X More Run-Time
- Up to 20% More Power
- Over 2X More Recharges than Leading Competitors
- Operates Below -18°C / 0°F



PORTABLE PRODUCTIVITY
TRADE FOCUSED
SYSTEM WIDE



M12 FLEL

1/2" Hammer Drill/Driver Kit

2504-22 (2504-20 Tool-Only)

Specifications:

Peak Torque	350 in-lbs
RPM	0 – 1,700
BPM	0 – 25,500
Chuck Type	1/2" Metal Single Sleeve – Ratcheting Chuck
Length / Weight	6.6" / 2.3 lbs

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack. (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case

M12™ 3/8" Hammer **Drill/Driver Kit**

2408-22 (2408-20 Tool-Only)

Specifications:

M12 FUEL

Specifications:

Peak Torque	275 in-lbs
RPM	0 - 400 / 0 - 1,500
BPM	0 – 22,500
Chuck Type	3/8" Metal Single Sleeve
Length / Weight	7.5" / 2.7 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs. Belt Clip, Charger, Carrying Case

1/2" Drill/Driver Kit 2503-22 (2503-20 Tool-Only)

Peak Torque	350 in-lbs
RPM	0 – 1,700
Chuck Type	1/2" Metal Single Sleeve – Ratcheting Chuck
Length / Weight	6.6" / 2.3 lbs

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Carrying Case

M12 FLEL Installation **Drill/Driver Kit**

2505-22 (2505-20 Tool-Only)

Specifications:

Opcomoduo.		
Max Torque	300 in-lbs	
RPM (2-Mode)	0 - 400 / 0 - 1,600	
Attachments	3/8" Metal Chuck, 1/4" Hex, Offset and Rig	ht Angle
Lenath / Weiaht	5.1" / 2.0 lbs	

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, (4) Attachments (3/8" Metal Chuck, 1/4" Hex, Offset and Right Angle), Belt Clip, Charger, Compartmentalized Contractor Bag

M12™ 3/8" **Drill/Driver Kit**

2407-22 (2407-20 Tool-Only)

Specifications:	
Peak Torque	275 in-lbs
RPM	0 - 400 / 0 - 1,500
Chuck Type	3/8" Metal Single Sleeve
Length / Weight	7.4" / 2.5 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case



2415-21 (2415-20 Tool-Only)

Specifications:

-	
Peak Torque	100 in-lbs
RPM	0 – 800
Clutch Settings	11 Settings plus Drill Mode
Chuck Type	3/8" Single Sleeve
Head Profile	3.8"
Weight	2.4 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Soft Carrying Case

M12 FUEL 1/4" Hex 2-Speed Screwdriver Kit

2402-22 (2402-20 Tool-Only)

Specifications:

Peak Torque	325 in-lbs
RPM	0 - 450 / 0 - 1,700
Chuck Type	1/4" Hex Quick Change
Length / Weight	6.6" / 2.0 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex 2-Speed **Screwdriver Kit**

2406-22 (2406-20 Tool-Only)

Specifications:

Peak Torque	275 in-lbs
RPM	0 - 400 / 0 - 1,500
Chuck Type	1/4" Hex Quick Change
Length / Weight	6.8" / 1.8 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex **Screwdriver Kit**

2401-22 (2401-20 Tool-Only)

Specifications:

Peak Torque	175 in-lbs
RPM	0 – 500
Chuck Type	1/4" Hex Quick Change
Length / Weight	6.5" / 2.0 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Soft Carrying Case

M12 FUEL 1/4" Hex Impact Driver Kit

2553-22 (2553-20 Tool-Only)

Specifications:

Fastening Torque	1,300 in-lbs
IPM	0 – 4,000
RPM	0 – 3,300
Chuck Type	1/4" Hex Quick Change
Length / Weight	5.1" / 1.8 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case



SURGE™ 1/4" Hex Hydraulic Driver Kit

2551-22 (2551-20 Tool-Only)

Specifications:

450 ft-lbs
0 – 3,400
0 – 3,200
1/4" Hex Quick Change
5.2" / 2.4 lbs

Includes: (2) M12™ REDLITHIUM™ CP2.0 Battery Packs, Belt Clip, Charger, Contractor Bag

M12™ 1/4" Hex Impact **Driver Kit**

2462-22 (2462-20 Tool-Only)

Specifications:

Fastening Torque	1,000 in-lbs
IPM	0 – 3,300
RPM	0 – 2,500
Chuck Type	1/4" Hex
Length / Weight	6.5" / 2.3 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Hex Right Angle **Impact Driver Kit**

2467-21 (2467-20 Tool-Only)

Specifications:

Fastening Torque	600 in-lbs
IPM	0 – 3,300
RPM	0 – 2,450
Chuck Type	1/4" Hex
Head Profile	1.4"
Weight	2.6 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Soft Carrying Case

1/2" Stubby Impact Wrench Kit

2555-22, 2555P-22 (2555-20 Tool-Only)

Specifications:

opoomoutione	-
Peak Torque	250 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,700
Anvil Type	1/2" Friction Ring
Length / Weight	4.9" / 2.1 lbs

Includes: 2555-22 1/2" Stubby Impact Wrench: 2555P-22 1/2" Stubby Impact Wrench w/ Pin Detent; **All Kits Include:** (1) M12™ REDLÍTHIÚM™ XC4.0 Battery Pack, (1) M12™ REDLÍTHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case



Specifications: 250 ft-lbs Peak Torque IPM 0 - 3,200RPM 0 - 2,700Anvil Type 3/8" Friction Ring Length / Weight 4.8" / 2.1 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case

1/4" Stubby Impact Wrench Kit

2552-22 (2552-20 Tool-Only)

Specifications:

Peak Torque	100 ft-lbs
IPM	0 – 4,300
RPM	0 – 3,200
Anvil Type	1/4" Friction Ring
Length / Weight	5.1" / 1.8 lbs
Lengin / Weigni	5.1 / 1.0

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Belt Clip, Charger, Soft Carrying Case

3/8" Impact Wrench Kit 2454-22 (2454-20 Tool-Only)

Specifications:

117 ft-lbs
0 – 3,500
0 - 1,200 / 0 - 2,650
3/8" Friction Ring
6.5" / 2.4 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 3/8" Impact Wrench Kit

2463-22 (2463-20 Tool-Only)

Specifications:

Peak Torque	TOU IT-IDS
IPM	0 – 3,300
RPM	0 – 2,500
Anvil Type	3/8" Friction Ring
Length / Weight	6.5" / 2.3 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Charger, Carrying Case

M12™ 1/4" Impact Wrench Kit

2461-22 (2461-20 Tool-Only)

Specifications:

Peak Torque	38 ft-lbs
IPM	0 – 3,800
RPM	0 – 2,500
Anvil Type	1/4" Friction Ring
Length / Weight	6.0" / 2.1 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, Belt Clip, Charger, Carrying Case













M12 FUEL

1/2" Ratchet Kit

2558-22 (2558-20 Tool-Only)

Specifications:

Fastening Torque	60 ft-lbs
RPM	0 – 175
Anvil Type	1/2" Ball Detent
Head Profile	1.1"
Length / Weight	12.5" / 3.1 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger, Contractor Bag

Related Accessory: 49-16-2558 M12 FUEL™ 1/2" Ratchet Rubber Boot



2557-22 (2557-20 Tool-Only)

Specifications:

Fastening Torque	55 ft-lbs
RPM	0 – 200
Anvil Type	3/8" Ball Detent
Head Profile	1.1"
Length / Weight	11.8" / 2.8 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger, Contractor Bag

Related Accessory: 49-16-2557 M12 FUEL™ 3/8" Ratchet Rubber Boot

M12 FUEL

1/4" Ratchet Kit

2556-22 (2556-20 Tool-Only)

Specifications:

Fastening Torque	40 ft-lbs
RPM	0 – 250
Anvil Type	1/4" Ball Detent
Head Profile	0.7"
Length / Weight	11.2" / 2.3 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Charger, Contractor Bag Related Accessory:

49-16-2556 M12 FUEL™ 1/4" Ratchet Rubber Boot

M12 FUEL

3/8" Extended Reach Ratchet Kit

2560-21 (2560-20 Tool-Only)

Specifications:

Fastening Torque	55 ft-lbs
RPM	0 – 200
Anvil Type	3/8" Ball Detent
Head Profile	0.76"
Length / Weight	15.1" / 3.1 lbs

Includes: (1) M12™ REDLITHIUM™ CP2.0 Charger, Contractor Bag

Related Accessory: 49-16-2560 M12 FUEL™ 3/8" Extended Reach Ratchet Rubber Boot

1/4" Extended Reach Ratchet Kit

2559-21 (2559-20 Tool-Only)

Specifications:

Opcomoduons	•	
Fastening Torque	40 ft-lbs	
RPM	0 – 250	
Anvil Type	1/4" Ball Detent	
Head Profile	0.76"	
Length / Weight	14.4" / 2.3 lbs	

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Charger, Contractor Bag

Related Accessory: 49-16-2559 M12 FUEL™ 1/4" Extended Reach Ratchet Rubber Boot

M12™ 3/8" Ratchet Kit

2457-21 (2457-20 Tool-Only)

Specifications:

Fastening Torque	35 ft-lbs
RPM	0 – 250
Anvil Type	3/8" Ball Detent
Head Profile	0.7"
Length / Weight	10.8" / 1.9 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 3/8" - 1/4" Adapter, Charger, Soft Carrying Case



M12™ 1/4" Ratchet Kit

2456-21 (2456-20 Tool-Only)

Specifications:

Fastening Torque	30 ft-lbs
RPM	0 – 250
Anvil Type	1/4" Ball Detent
Head Profile	0.8"
Length / Weight	10.8" / 1.9 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Soft Carrying Case

M12™ Rivet Tool Kit

2550-22 (2550-20 Tool-Only) Specifications:

	Pull Force	2,000 lbs
	Stroke Length	0.8"
	Rivet Sizes	3/32" - 3/16"
	Rivet Material	Aluminum, Steel and Stainless Steel
	Length / Weight	6.5" (without mandrel collector) / 4.5 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, (4) Nose Pieces (3/32", 1/8", 5/32", 3/16"), Belt Hook, Charger, Contractor Bag

M12 FUEL

5/8" SDS Plus Rotary Hammer Kit

2416-22XC (2416-20 Tool-Only)

Specifications:

RPM	0 – 900
BPM	0 – 6,200
2-Mode Operation	Rotary Hammer and Rotation Only
Length / Weight	10.0" / 3.9 lbs

Includes: (2) M12[™] REDLITHIUM[™] XC4.0 Battery Packs, Charger, Carrying Case

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor Kit

M12™ 1/2" SDS Plus Rotary Hammer Kit

2412-22XC (2412-20 Tool-Only)

Specifications:

RPM	0 - 800
BPM	0 – 5,350
2-Mode Operation	Rotary Hammer and Rotation On
Length / Weight	9.0" / 3.9 lbs

Includes: (2) M12™ REDLITHIUM™ XC3.0 Battery Packs, Charger, Carrying Case

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor Kit



M12™ Palm Nailer Kit

2458-21 (2458-20 Tool-Only)

Specifications:

Impact Energy	2.2 ft-lbs (3.0 J)
BPM	0 – 2,700
Collet Capacity	6D – 16D
Head Profile	3/4"
Magnetic Tip	Yes
Weight	3.4 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack,

Specifications:

Handle System	Brands of SDS Plus Rotary Hammers and AC and DC Hammer Drills
Replaceable Certified HEPA Filter	Filters 99.97% of Debris 0.3 Microns and Above
Self-Powered by M12™ REDLITHIUM™ Battery Pack	No Cords or Hoses for Maximum Portability
3-Mode Switch	Yes (Auto-On and Auto-Off w/ Delay)
Max Bit Size	5/8"

HEPA

OSHA

TABLE '

Hand Strap, Charger, Soft Carrying Case

M12™ HAMMERVAC™ **Universal Dust Extractor Kit**

2306-22 (2306-20 Tool-Only)

Universal Handle System	Compatible with Majon Brands of SDS Plus Rotary Hammers and AC and DC Hammer Drills
Replaceable Certified HEPA Filter	Filters 99.97% of Debris 0.3 Microns and Above
Self-Powered by M12™ REDLITHIUM™ Battery Pack	No Cords or Hoses for Maximum Portability

Weight 3.3 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, (3) Side Handle Collars, Side Handle Grip, Nozzle, Charger, Carrying Case

M12™ 3/8" Crown Stapler Kit

2447-21 (2447-20 Tool-Only)

Specifications:

Staple Crown Size	3/8" Flat Crown
Staple Length	1/4" - 9/16"
Staple Type	T-50
Length / Weight	7.3" / 3.0 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Contractor Bag



1/4" Right Angle Die Grinder Kit

2485-22 (2485-20 Tool-Only)

Specifications:

Power Output	0.3 HP
RPM	0 – 24,500
Collet Size	1/4"
Accessory Size	2"
Height / Length	8.7" / 4.5"
Weight	1.7 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, (2) Wrenches, Charger, Contractor Bag

Related Accessory:

49-16-2485 M12 FUEL™ 1/4" Right Angle Die Grinder Rubber Boot

M12 FUEL 1/2" Digital Torque Wrench w/ ONE-KEY™ Kit

2466-22 (2466-20 Tool-Only)

Specifications:

	Torque Range	12.5 - 150 ft-lbs
	RPM	0 – 100
	Tool Accuracy	CW: +/-2% of Full Scale / CCW: +/3% of Full Scale (Range: 20% – 100% of Full Scale)
	Ratcheting Angle	4.5°
	Anvil Size	1/2" Ball Detent
	Measuring Units	ft-lbs, in-lbs, Nm, kg-cm
	Length / Weight	23.5" / 5.7 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Certificate of Calibration, Charger, Carrying Case



M12 FUEL 3/8" Digital Torque Wrench w/ ONE-KEY™ Kit

2465-22 (2465-20 Tool-Only)



Torque Range	10 - 100 ft-lbs
RPM	0 – 100
Tool Accuracy	CW: +/-2% of Full Scale / CCW: +/3% of Full Scale (Range: 20% – 100% of Full Scale)
Ratcheting Angle	4.5°
Anvil Size	3/8" Ball Detent
Measuring Units	ft-lbs, in-lbs, Nm, kg-cm
Length / Weight	23.3" / 5.5 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP2.0 Battery Packs, Certificate of Calibration, Charger, Carrying Case





M12™ Spot Polisher Kit

2438-22X, 2438-22 (2438-20 Tool-Only)

Specifications:

•	
Polishing RPM	0 – 2,800
Sanding RPM	0 - 8,300
Length / Weight	5.1" / 2.4 lbs

Includes: 2438-22X (1) M12[™] REDLITHIUM[™] XC3.0 Battery Pack, (1) M12™ REDLITHIUM™ CP1.5 Battery Pack; 2438-22 (2) M12™ REDLITHIUM™ CP1.5 Battery Packs; All Kits Include: 5 Pc Accessory Pack, Side Handle,

Charger, Soft Carrying Case



5-3/8" Circular Saw Kit

2530-21XC (2530-20 Tool-Only) Specifications:

opcomoatio		
RPM	3,600	19-19-20
Bevel Capacity	50°	
Cut Capacity	1-5/8" at 90°; 1-1/8" at 45	0
Arbor	10 mm	
Blade Guards	Aluminum	
Weight	6.2 lbs	

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, Circular Saw Blade, Wrench, Charger, Contractor Bag



M12 FLEL **HACKZALL® One-Handed Recip Saw Kit**

2520-21XC (2520-20 Tool-Only)

Specific	ations:
SPM	0 - 3

SPM	0 – 3,000
Stroke Length	5/8"
Keyless Blade Clamp	QUIK-LOK™ (Accepts all SAWZALL® Blades)
Length / Weight	13.3" / 4.1 lbs

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, HACKZALL® Blade, Charger, Contractor Bag

M12™ HACKZALL® One-Handed **Recip Saw Kit**

2420-22, 2420-21 (2420-20 Tool-Only)

Length / Weight 11.0" / 2.6 lbs

Specificatio	ons:	
SPM	0 – 3,000	Manada
Stroke Length	1/2"	
Keyless Blade Clamp	QUIK-LOK [™] (Accepts all SAWZALL® Blades	s)

Includes: 2420-22 (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs; **2420-21** (1) M12™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: (2) HACKZALL® Blades, Charger, Contractor Bag

M12™ High Performance Jig Saw Kit

2445-21 (2445-20 Tool-Only)

Specifications:

SPM	0 – 2,800
Stroke Length	3/4"
Bevel Capacity	45° (Positive Locks at 90° and 45°)
Blade Clamp	QUIK-LOK™ T-Shank
Length / Weight	8.8" / 4.2 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 10 TPI Wood Cutting T-Shank Jig Saw Blade, Anti-Splintering Insert, Non-Marring Shoe, Charger, Contractor Bag

M12™ Multi-Tool Kit

2426-22, 2426-21 (2426-20 Tool-Only)

Specifications:

Speed Settings	12
OPM	5,000 – 20,000
Universal Accessory Adapter	Yes
Length / Weight	10.9" / 2.1 lbs

Includes: 2426-22 (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs; **2426-21** (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack; All Kits Include: Accessory Adapter, Wood Cutting Blade, Sanding Pad, (5) Assorted Sanding Sheets, Charger, Contractor Bag

M12™ Sub-Compact **Band Saw Kit**

2429-21XC (2429-20 Tool-Only)

Specifications:

•	
SFPM	280
Blade Size	27"
Cut Capacity	1-5/8" x 1-5/8"
Length / Weight	11.0" / 6.7 lbs

Meets OSHA Guarding Requirements. Suitable for One-Handed Use.

Includes: (1) M12[™] REDLITHIUM[™] XC3.0 Battery Pack, 18 TPI Sub-Compact Portable Band Saw Blade, Charger, Carrying Case **Related Accessories:**

48-39-0572 18 TPI Sub-Compact Portable Band Saw Blades (3-Pack); 48-39-0711 12/14 TPI Extreme Metal Sub-Compact Portable Band Saw Blades (3-Pack)









M12™ 10 oz Caulk & **Adhesive Gun Kit**

Related Accessory: 49-94-1500 5 Pc Reinforced Cut-Off Wheels

M12™ Rotary Tool Kit

2460-21 (2460-20 Tool-Only)

Specifications:

Speed Settings RPM

Length / Weight

Collet

2441-21 (2441-20 Tool-Only)

Specifications:

Weight

Force	400 lbs
Inches Per Minute	0 – 29
Speed Settings	6
Auto-Reverse Anti-Drip	Yes
Weight	4.1 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 10 oz Carriage, M12™ 10 oz Plunger Rod and Piston Assembly, Charger

5,000 - 32,000

1/8", Universal

9.5" / 1.3 lbs

(5) Cutting Wheels, Mandrel, Wrench, Charger, Soft Carrying Case

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack,

M12[™] 20 oz Aluminum Barrel Sausage **Style Caulk & Adhesive Gun Kit**



Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 20 oz Aluminum Sausage Style Barrel, M12™ 20 oz Plunger Rod and Piston Assembly, Nozzle, Charger

4.9 lbs


M12 FUEL 3" Compact Cut-Off Tool Kit

2522-21XC (2522-20 Tool-Only) Specifications:

Length / Weight

Specifications:	
Blade Size	3"
RPM	20,000
Arbor Size	3/8"
Cut Depth	0.64"
Blade Rotation	Reversible

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, Dust Accessory Shoe, (3) Accessory Blades (Metal Cut-Off, Carbide Abrasive, Diamond Tile), Blade Wrench, Charger, Contractor Bag



M12™ Quart Caulk & **Adhesive Gun Kit** 2444-21

Specifications:

Force 400 lbs Inches Per Minute 0 - 29Speed Settings Auto-Reverse Anti-Drip Yes Weight 5.5 lbs

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Quart Carriage, M12™ Quart Plunger Rod and Piston Assembly, Charger

Caulk Gun Accessories

Compatible with 2441-21, 2442-21, 2444-21

31-12-0700 Caulk Gun Nozzle - Black;

48-08-0900 M12[™] 10 oz Caulk and Adhesive Gun Conversion Kit;

48-08-0905 M12[™] 20 oz Aluminum Barrel Sausage Style Caulk and Adhesive Gun Conversion Kit;

48-08-0910 M12™ Quart Caulk and Adhesive Gun Conversion Kit;

48-08-1091 20 oz Aluminum Barrel Kit;

48-08-1096 20 oz Clear Barrel Kit

M12™ Grease Gun Kit

2446-21XC (2446-20 Tool-Only)

Specifications:

Run-Time Up to 7 Grease Cartridges Per Charge	е
Grease Capacity 14 oz Cartridge, 16 oz Bulk, 16 oz Suction	annu.

Air Bleeder Valve Yes Weight 7.2 lbs

Includes: (1) M12[™] REDLITHIUM[™] XC3.0 Battery Pack, 36" Flex Hose with Spring Guard, Grease Coupler, Charger, Carrying Case



M12™ Soldering Iron Kit

2488-21 (2488-20 Tool-Only)

Specifications:

,	Max Temperature	750°F
	Heat Output	90 Watts
	Heat-Up Time	18 Seconds
	Heat Indicator	Yes
	Interchangeable Tips	Chisel and Point
	Length / Weight	11.6" / 0.9 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Chisel Tip, Pointed Tip, Charger, Carrying Case





M12™ Cable Stripper Kit

2435CU-21, 2435AL-21, 2435X-21 (2435-20 Tool-Only)

Specifications:

Yes
Yes
Industry Standard Quick-Change
8.6" x 2.8" x 11.5"
3.6 lbs

Includes: 2435CU-21 1/0 AWG - 750 MCM Cu THHN / XHHW Bushings; **2435AL-21** 1/0 AWG - 750 MCM AI THHN / XHHW Bushings: 2435X-21 1/0 AWG - 500 MCM Cu RHW / RHH / USE Bushings; All Kits Include: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Reference Available Bushings on Pg. 62



M12™600 MCM Cable Cutter Kit

2472-21XC (2472-20 Tool-Only)

Specifications:		
Cut Capacity	600 MCM Copper, 750 MCM Aluminum, 1-3/16" Communication Cable	
Jaw Opening	1-7/16"	
Two-Speed	Yes	
Length / Weight	10.5" / 6.7 lbs	WEST OF STREET

Includes: (1) M12™ REDLITHIUM™ XC3.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Related Accessory: 48-44-0410 M12™ 600 MCM Cable Cutter Blade

M12™ Plastic Pipe **Shear Kit**

2470-21 (2470-20 Tool-Only)

Specifications:	
Cut Capacity	Up to 2" Schedule 80 PVC
Torque	1,900 in-lbs
Blade	3 mm Reinforced Stainless Steel
Lenath / Weight	14.4" / 4.4 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Charger, Carrying Case

Related Accessory:

48-44-0405 M12[™] Plastic Pipe Shear Blade

M12™ Copper Tubing **Cutter Kit**

2471-22, 2471-21 (2471-20 Tool-Only)

Specifications:	
Cut Capacity	3/8" - 1" (1/2" - 1-1/8" O.D.)
Tubing Type	M, L and K Copper
RPM	500
Length / Weight	14.0" / 3.2 lbs

Includes: 2471-22 (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs; **2471-21** (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack; All Kits Include: Charger, Carrying Case

Related Accessory: 48-38-0010 Copper Cutter Wheel (2-Pack)

M12™ Drain Snake Kit

2571-21 (2571-20 Tool-Only)

Specifications:

Specifications.		
1-1/4" – 2-1/2", Up to 25'		
1/4" x 25', Best for 1-1/4" – 2" drain lines; 5/16" x 25', Best for 1-1/4" – 2-1/2" drain lines		
0 – 500 RPM		
Yes		
6.5 lbs		

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, 5/16" x 25' Inner Core Bulb Head Cable with Inner Drum, Charger, 5 Gallon Storage Bucket

Related Accessories:

48-53-2561 5/16" x 25' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating; 48-53-2562 5/16" x 25' Inner Core Drop Head Cable w/ RUST GUARD™ Plating; 48-53-2563 1/4" x 25' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating;

48-53-2564 1/4" x 25' Inner Core Drop Head Cable w/ RUST GUARD™ Plating

M12™ TRAPSNAKE™ 6¹ Toilet Auger Kit 2576-21 (2576-20 Tool-Only)

Specifications:

	RPM	0 – 500
	Cable Lock	Yes
	Cable Size	6' x 1/2"
	Cable Head	Retriever Bulb
	Replacement Cables	Available
	Weight	9.0 lbs

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Cable, Charger

Related Accessories:

48-53-2576 TRAPSNAKE™ 6' Toilet Auger Replacement Cable; 48-22-2576 TRAPSNAKE™ Toilet Auger Case; 2575-21 M12™ TRAPSNAKE™ Driver Upgrade Kit



M12™ TRAPSNAKE™ 4' Urinal Auger Kit

2574-21 (2574-20 Tool-Only)

Specifications:

specifications	i i	
RPM	0 – 500	
Cable Lock	Yes	
Cable Size	4' x 3/8"	
Cable Head	Bulb	
Replacement Cables	Available	
Weight	6.4 lbs	



Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Cable, Charger **Related Accessories: 48-53-2577** TRAPSNAKE[™] 4' Urinal Auger Replacement Cable;

48-22-2577 TRAPSNAKE™ Urinal Auger Case; **2575-21** M12[™] TRAPSNAKE[™] Driver Upgrade Kit

M12™ AIRSNAKE™ **Drain Cleaning Air Gun Kit**

2572B-21, (2572B-20 Tool-Only)

Specifications:		1 - 1 - 1	
Max Drain Line Capacity	1" – 4", Up to 35'		Milwaukee
Automatic Pressure Loading	Yes		SAIRSNAK
Variable Pressure	0 - 50 PSI		
Variable Pressure Dial	Yes		
LED Light	Yes		
Length / Weight	20.8" / 7.1 lbs		

Includes: 2572B-21 (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Charge

All Kits Include: 2572B-20: 1" - 2" Drain Plug, 2" - 3" Drain Plug, 3" - 4" Drain Plug, Drain Shroud Attachment, Toilet Seal Attachment, 10" Extension, (3) Straight Connectors, 15° Offset Connector, Carrying Case



M12™ ProPEX® Expansion Tool Kit

2432-22XC, 2432-22 (2432-20 Tool-Only)

Specifications:		
Capacity	3/8" - 1"	
Auto-Rotate	Built-In	
Head Compatibility	3/8" - 1" M12™ / Uponor	
Dimensions (L x W x H)	7.1" x 3.7" x 12.8"	
Weight	5.0 lbs	

Includes: 2432-22XC (2) M12™ REDLITHIUM™ XC3.0 Battery Packs; 2432-22 (2) M12™ REDLITHIUM™ CP1 5 Battery Packs

All Kits Include: (3) ProPEX® Expansion Heads (1/2", 3/4", 1"), Grease, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-08-2400 ProPEX® Expander Cone Grease; 49-16-2403 3/8" ProPEX® Expansion Head; 49-16-2404 1/2" ProPEX® Expansion Head; 49-16-2405 5/8" ProPEX® Expansion Head; 49-16-2406 3/4" ProPEX® Expansion Head: 49-16-2408 1" ProPEX® Expansion Head



M12™ FORCE LOGIC™ **Press Tool Kit**

2473-22 (2473-20 No Jaw Kit)

Specifications:

Capacity	1/2" - 1-1/4" CU
Calibration Interval	32,000 Cycles (LED Indicator)
Approximate Cycle Time	5 Seconds
Press Force	5,400 lbs
Length / Weight	12.8" / 3.8 lbs

Includes: 2473-22 (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, (3) Jaws (1/2", 3/4", 1"), Charger, Carrying Case; **2473-20** (2) M12™ REDLITHIUM™ CP1.5 Battery Packs, Charger,

Carrying Case (No Jaws Included)

Related Accessories:

49-16-2450 1/2" CTS Jaw; **49-16-2451** 3/4" CTS Jaw;

49-16-2452 1" CTS Jaw;

49-16-2453 1-1/4" CTS Jaw

49-16-2450B 1/2" IPS Jaw;

49-16-2451B 3/4" IPS Jaw;

49-16-2451C 1/2" PEX Crimp (F1807 & F2159) Jaw;

49-16-2453C 3/4" PEX Crimp (F1807 & F2159) Jaw;

49-16-2454C 1" PEX Crimp (F1807 & F2159) Jaw; 49-16-2455C 1-1/4" PEX Crimp (F1807) Jaw;

49-16-2456C 1-1/2" PEX Crimp (F1807) Jaw




M12™ No-Hub Driver Kit

2455-22 (2455-20 Tool-Only)

Specifications

Specifications:	
Torque Settings (3-Mode)	60 in-lbs / 80 in-lbs / Drill
RPM	0 – 750
Chuck Type	1/4" Hex
Calibration Interval	25,000 Cycles (LED Indicator)
Weight	2.7 lbs

Includes: (2) M12[™] REDLITHIUM[™] CP1.5 Battery Packs, (3) SHOCKWAVE™ Nut Drivers (1/4", 5/16", 3/8"), Charger, Carrying Case

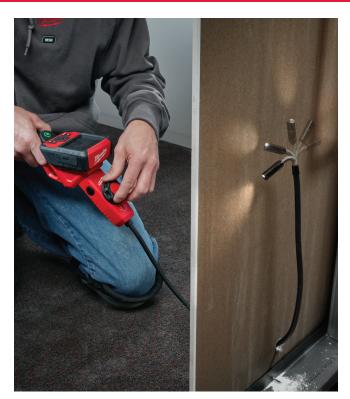

M12™ M-SPECTOR FLEX™ 3 ft Inspection Camera Cable w/ PIVOTVIEW™ Kit 2317-21

Specifications:

Screen Size	3.5" High-Resolution LCD
Camera Resolution	640 x 480
Camera Head Diameter	12.5 mm (0.49")
Head Movement	Up to 270° PIVOTVIEW™ Camera
Cable Length	3 ft
Wireless Distance	Up to 15 ft

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case

M12™ M-SPECTOR FLEX™ 9 ft Inspection **Camera Cable Kit**

2316-21

C-----

,	Specifications:			
	Screen Size	3.5" High-Resolution LCD		
	Camera Resolution	640 x 480		
	Camera Head Diameter	12.5 mm (0.49")		
	Cable Length	9 ft		
	Wireless Distance	Up to 15 ft		

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case




M12™ M-SPECTOR FLEX™ 3 ft Inspection Camera **Cable Kit**

2315-21

Specifications:

-	Market and the second s
Screen Size	3.5" High-Resolution LCD
Camera Resolution	640 x 480
Camera Head Diameter	12.5 mm (0.49")
Cable Length	3 ft
Wireless Distance	Up to 15 ft

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Charger, Carrying Case

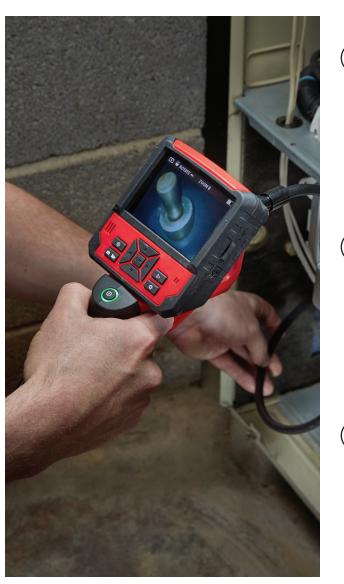

M-SPECTOR FLEX™ Inspection **Camera Accessories**

Compatible with 2317-21, 2316-21, 2315-21

48-53-0155 M-SPECTOR FLEX™ 3 ft Inspection Camera Cable

48-53-0151 M-SPECTOR FLEX™ 9 ft Inspection Camera Cable; 48-53-0150 M-SPECTOR FLEX™ 3 ft Inspection Camera Cable



M12^M M-SPECTOR 360 Rotating Inspection Scope Kit 2313-21 (2313-20 Tool-Only)

Specifications: Screen Size 2.7" High-Resolution LCD Display Resolution 320 x 240 Camera Head Diameter 9 mm (0.35") Cable Length 3 ft LED Brightness 4 LEDs, 5 Settings

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Charger, Contractor Bag

M12™ M-SPECTOR 360™ 9 ft Rotating Inspection **Scope Kit**

2314-21

Specifications:

Screen Size	2.7" High-Resolution LC
Display Resolution	320 x 240
Camera Head Diameter	9 mm (0.35")
Cable Length	9 ft
LED Brightness	4 LEDs, 5 Settings

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, Hook, Magnet, Mirror Attachments, Pipe Guide, Charger, Contractor Bag

M-SPECTOR 360™ Rotating Inspection Scope Accessories

Compatible with 2313-21, 2314-21

48-53-0112 3 Pc Accessory (Includes Hook, Magnet, Mirror Attachments); 48-53-0113 Pipe Guide Accessory



M12[™] 102 x 77 Infrared **Camera Kit**

2258-21

Specifications:

-	
Sensor Resolution	102 x 77 Pixels
Temperature Range	14°F - 626°F (-10°C - 330°C)
LCD Display	2.4" High Resolution
Color Palettes	Iron, Rainbow, Gray
Focus Method	Auto-Ranging
Image Storage & Reporting	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, SD Card, USB Cable, Protective Boot, Charger, Carrying Case



M12™ 12:1 Infrared TEMP-GUN™

2278-20 Tool-Only

Specifications:

Specifications.	
Distance-to-Spot Ratio	12:1
Temperature Range	-22°F – 1,022°F (-30°C – 550°C)
Basic Accuracy	+/-1.8%
Max/Min/Avg/Dif	Yes
High/Low Alerts	Yes
Emissivity	Fixed, .95
Drop Test	6 ft

Battery and Charger Sold Separately



22

M12™ ROCKET™ Dual Power **Tower Light**

2132-20 Tool-Only

Specifications:

Lumens	1,400 / 700
Modes	High, Low
Powered By	M12 [™] or Corded
Height	30.5" Collapsed, 5' 8" Fully Extended
Weight	6.7 lbs

Battery and Charger Sold Separately



M12™ ROVER™ Mounting Flood Light

2364-20 Tool-Only

Specifications:

Lumens	1,000 / 400 / 200
Modes	High, Medium, Low
Hands Free	Integrated Magnet, Spring Loaded Clamp
Water & Dust Rating	IP54
Length / Weight	7.5" / 2.2 lbs

Battery and Charger Sold Separately



M12™ Metal Flashlight Kit 2355-21 (2355-20 Tool-Only)

Specifications:

Lumens	800 / 325 / 800
Modes	High, Medium, Strobe
Beam Distance	375 yd / 343 m
Beam Focus	Slide, Spot/Flood
Water & Dust Rating	IP54
Structure	6000 Series Aluminum, Type II Anodize Finish
Length / Weight	9.0" / 1.2 lbs

Includes: (1) M12™ REDLITHIUM™ CP1.5 Battery Pack, Lanyard, Charger



2353-20 Tool-Only

Specifications:

•	
Lumens	750 / 400 / 750
Modes	High, Low, Strobe
Beam Distance	700 yd / 640 m
Water & Dust Rating	IP54
Length / Weight	6.1" / 1.4 lbs

Battery and Charger Sold Separately

Includes: Lanyard



POWERED BY

M12™ Trouble Light w/ USB Charging

2362-20 Tool-Only

C-----

Specifications:	
Lumens	400 / 200 / 40 / 400
Modes	High, Medium, Low, Strobe
Run-Time	Up to 67 Hours
Beam Pattern	Adjustable Task - Area
Water & Dust Rating	IPX4
Hands-Free	2 Hooks for Hanging
USB Charger	2.1A USB Charging Port for External Devices
Length / Weight	10.5" / 1.0 lb



M12™ Underhood Light Kit

2125-21XC (2125-20 Tool-Only)

Specifications:

Lumens	1,350 / 600
Modes	High, Low
Hooks	FINISHGUARD™ to Resist Wear & Provide Lasting Protection
Length / Weight	48" Collapsed, 78" Fully Extended / 2.2 lbs

Includes: (1) M12™ REDLITHIUM™ XC4.0 Battery Pack, Charger

M12™ Stick Light

2351-20 Tool-Only

Specifications:

Lumens	220
Hands-Free	Multi-Position Stainless Steel Hook
Water & Dust Rating	IP54
Length / Weight	9.3" / 0.6 lbs

Battery and Charger Sold Separately

Related Accessory:

49-24-2351 M12[™] Stick Light Magnet Holds light to metal surfaces for hands-free use

M12™ Work Light

49-24-0146 Tool-Only

Specifications:

Lumens	100
Hands-Free	Integrated Magnet
Head Rotation	90°

Battery and Charger Sold Separately





M12™ Heated TOUGHSHELL™ **Jacket Kit**

Black 202B-21 (S - 3X)*, 202B-20 Jacket-Only Gray 202G-21 (S - 3X)*, 202G-20 Jacket-Only 202G Red 202R-21 (S - 3X)*, 202R-20 Jacket-Only Specifications:

opoomoutione.	
Heat Zones	3 (Chest, Bac
Heat Settings	3 (High, Med

3 (High, Medium, Low) Run-Time Up to 8 Hours Outer Material TOUGHSHELL* Stretch Polvester Wind / Water Resistant Yes

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source

M12™ Women's Heated SOFTSHELL Jacket Kit

Black 232B-21 (S - 2X)*, 232B-20 Jacket-Only **Specifications:**

Washer / Dryer Safe

Heat Zones	3 (Back, Collar, Pockets)	
Heat Settings	3 (High, Medium, Low)	
Run-Time	Up to 8 Hours	
Outer Material	Polyester Softshell	
Wind / Water Resistant	Yes	
Washer / Dryer Safe	Yes	

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source

M12™ Heated QUIETSHELL **Jacket Kit**

Camo 222C-21 (S - 3X)*, 222C-20 Jacket-Only Specifications:

Heat Zones	3 (Chest, Back, Pockets)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 8 Hours
Outer Material	QUIETSHELL Stretch Polyester
Wind / Water Resistant	Yes
Washer / Dryer Safe	Yes
Realtree EDGE © 2019 of Jordan Out	door Enterprises, Ltd., all rights reserved

Includes: (1) M12™ REDLITHIUM™ CP2.0 Battery Pack,

Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source



Black/Gray 203RN-21 (S - 3X)*

Specifications:

Heat Zones	3 (Chest, Back, Shoulders)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 8 Hours
Outer Material	Polyurethane laminate / Ripstop Polyester
Waterproof	10K mm
Washer / Dryer Safe	Yes

Includes: HYDROBREAK™ Rain Shell, M12™ Heated AXIS™ Jacket, (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source



M12™ Heated AXIS™ Layering System w/ GRIDIRON™ Work Shell Kit

Black 255B-21 (S - 3X)*

Specifications:

Heat Zones	3 (Chest, Back, Shoulders)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 8 Hours
Outer Material	GRIDIRON™ Ripstop Polyester
Insulation	60G Body / 40G Sleeve
Washer / Dryer Safe	Yes

Includes: GRIDIRON™ Work Shell. M12™ Heated AXIS™ Jacket. (1) M12™ REDLITHIUM™ CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source

24







M12™ Heated AXIS™ **Jacket Kit**

Black 203B-21 (S - 3X)*, 203B-20 Jacket-Only 203OG Olive Green 203OG-21 (S - 3X)*, 203OG-20 Jacket-Only **Specifications:**

Heat Zones	3 (Chest, Back, Shoulders)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 8 Hours
Outer Material	AXIS™ Ripstop Polyester
Wind / Water Resistant	Yes
Washer / Dryer Safe	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source

M12™ Women's Heated AXIS™ **Jacket Kit**

Black 233B-21 (S - 2X)*, 233B-20 Jacket-Only 233B **Specifications:**

•	
Heat Zones	3 (Chest, Back, Shoulders)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 8 Hours
Outer Material	AXIS™ Ripstop Polyester
Wind / Water Resistant	Yes
Washer / Dryer Safe	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Micro-USB 3 ft Cable and Wall Plug, M12™ Compact Charger and Power Source



M12™ Heated AXIS™ Vest Kit

Black 303B-21 (S - 3X)*, 303B-20 Vest-Only **Specifications:**

Heat Zones	2 (Chest, Back)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 6 Hours
Outer Material	AXIS™ Ripstop Polyester
Wind / Water Resistant	Yes
Washer / Dryer Safe	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, M12™ Battery Holder, Charger



M12™ Women's Heated AXIS™ Vest Kit

Black 333B-21 (S - 2X)*, 333B-20 Vest-Only Specifications:

•	specifications.	
	Heat Zones	2 (Chest, Back)
	Heat Settings	3 (High, Medium, Low)
	Run-Time	Up to 6 Hours
	Outer Material	AXIS™ Ripstop Polyester
	Wind / Water Resistant	Yes
	Washer / Dryer Safe	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, M12[™] Battery Holder, Charger



302B-20 Hoodie-Only Gray 302G-21 (S - 3X)*, 302G-20 Hoodie-Only Red 302R-21 (S - 3X)*, 302R-20 Hoodie-Only

Specifications:

Heat Zones	2 (Chest, Back)
Heat Settings	3 (High, Medium, Low)
Run-Time	Up to 6 Hours
Wind Resistant	Yes
Washer / Dryer Safe	Yes

Includes: (1) M12[™] REDLITHIUM[™] CP1.5 Battery Pack, M12™ Battery Holder, Charger



M12™ Power Source

49-24-2310

Specifications:

USB Charging Port	2.1A USB Charging Port for External Devices
On-Board Fuel Gauge	Yes
Powered By	All M12™ Batteries

Battery Sold Separately

561-21 (M - XL)*

Heat Settings

Run-Time

Material

Specifications: Heat Zones

Wind / Water Resistant Yes

Includes: (2) REDLITHIUM™ USB Batteries,

Powers all MILWAUKEE® M12™ Heated Gear

USB Rechargeable Heated Gloves Kit

Related Accessory: 48-59-1201 M12[™] Compact Charger and Power Source

2 (Fingers, Back of Hand)

3 (High, Medium, Low)

Up to 6 Hours

(2) USB Charger/Controllers, Heavy Duty Cord and Wall Plug



M12™ Cordless Radio 2590-20 Tool-Only

Battery and Charger Sold Separately

M18™ / M12™ Wireless

Bluetooth®, AUX (Cable Not Included)

USB Charging Port 2.1A USB Charging Port for External Devices

All M18™ and M12™ Batteries, AC Adapter

100 ft

Jobsite Speaker

2891-20 Tool-Only **Specifications:**

Bluetooth® Range

Includes: AC Adapter

Powered By

Modes

Specifications:

Modes	AM, FM, AUX
Tuner	Digital Processor w/ 10 Station Presets
Powered By	All M12™ Batteries, AC Adapter

Battery and Charger Sold Separately

Includes: Auxiliary Input Cord, AC Adapter, (2) AAA Batteries (For Memory Backup)



M12™ Wireless Jobsite Speaker

2592-20 Tool-Only

Specifications:

]	Modes	Bluetooth®, AUX (Cable Not Included)
	Bluetooth® Range	30 ft
	USB Charging Port	2.1A USB Charging Port for External Devices
	Powered By	All M12™ Batteries









Battery and Charger Sold Separately









M12™ Compact Inflator Kit

2475-21XC (2475-20 Tool-Only)

Specifications:

0 - 120 PSI
26"
+/- 3%
50% at 10 Minutes On and 10 Minutes Off
7.5" / 2.2 lbs

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, (4) Attachments (Ball Inflation Needle, Presta Chuck, Inflator Nozzle, Schrader Chuck), Charger

M12™ Compact Vacuum

0850-20 Tool-Only

Specifications:

Air Volume	33 CFM
Suction (H ₂ 0)	14.5"
Run-Time (XC4.0)	Up to 29 mins
Inlet Diameter	1-1/4"
Weight	2.3 lbs

Battery and Charger Sold Separately

Includes: Utility Nozzle, Extension Wand, Crevice Tool, Filter Assembly

Related Accessory: 49-90-1950 Filter

M12™ REDLITHIUM™ XC4.0 **System Starter Kit**

Includes: (1) M12[™] REDLITHIUM[™] XC4.0 Battery Pack, Charger



48-59-2420

48-59-2440

Includes: (1) M12[™] REDLITHIUM[™] CP2.0 Battery Pack, Charger



M12™ Four Bay **Sequential Charger**

48-59-1204

Specifications:

-p	,
Compatibility	All M12™ Batteries
Charge Sequence	Sequential (First In, First Charged)
Integrated Hang-Holes	Yes
Skip Button	Manually Designate which Battery Charges First
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes

Batteries Sold Separately

M18™ & M12™ Rapid Charge Station

48-59-1807

46-59-1607		-
Specifications:		
Compatibility	All M18 [™] and M12 [™] Batteries	
Charge Sequence	Charges 3 Batteries Simultaneously	
Charge Speed	Charges Individual Batteries up to 40% Faster	V
Capacity	Holds (3) M18 [™] and (3) M12 [™] Batteries	
Integrated Hang-Holes	Yes	_
Cell Voltage Monitoring	Yes	
Pass-Through Plug	Yes	



48-59-1808

Specifications

Specifications:	
Compatibility	All M18 [™] and M12 [™] Batteries
Charge Sequence	Sequential (First In, First Charged)
Charge Speed	Charges Individual Batteries up to 40% Faster
On-Board Indicator Light	Yes
Integrated Hang-Holes	Yes
Cell Voltage Monitoring	Yes

Batteries Sold Separately

M18™ & M12™ Multi-Voltage Charger

48-59-1812

Specifications:

Compatibility	All M18 [™] and M12 [™] Batteries	
Charge Sequence	Sequential (First In, First Charged)	
Integrated Hang-Holes	Yes	
On-Board Indicator Light	Yes	
Cell Voltage Monitoring	Yes	

Batteries Sold Separately

M18™ & M12™ Vehicle Charger 48-59-1810

Specifications:

ll M18™ and 12™ Batteries
equential irst In, First Charged)
es
es

Batteries Sold Separately

M12™ Compact Charger and Power Source

48-59-1201

Specifications:

Compatibility	All M12™ Batteries
USB Charging Port	2.1A USB Charging Port for External Devices
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes
Charges By	USB Port or AC Outlet

Battery Sold Separately

Includes: 3 ft Micro-USB Cable and 2.1A Wall Charger

M12™ Charger

48-59-2401

Specifications:

Opcomoduonsi	
Compatibility	All M12™ Batteries
Integrated Hang-Holes	Yes
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes

Battery Sold Separately












LIGHT DEMAND

FITS M12 TOOLS

HEAVY DEMAND





48-11-2430 M12™ REDLITHIUM™ CP3.0 Battery Pack



48-11-2420 M12™ REDLITHIUM™ CP2.0 Battery Pack



48-11-2401 M12[™] REDLITHIUM[™] CP1.5 Battery Pack

48-11-2411

2-Pack



48-11-2460

More power

and run-time



M12™ REDLITHIUM™ XC6.0 Battery Pack



48-11-2440 M12™ REDLITHIUM™ XC4.0 Battery Pack



48-11-2402 M12™ REDLITHIUM™ XC3.0 Battery Pack

48-11-2412 2-Pack



Pass-Through Plug

USB Rechargeable **Hard Hat Headlamp Kit**

2111-21

Lumens	475 / 300 / 300 / 150 / 25
Modes	Spot/Flood, Spot – High, Flood – High/Medium/Low
Water & Dust Rating	IP54
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord, Hard Hat Clips



POWERED BY
REDLITHIUM USB
RECHARGEABLE

USB Rechargeable **700L Focusing Flashlight Kit**

2110-21

Lumens	700 / 100 / 700
Modes	High, Low, Strobe
Spot Beam Distance	155 m
Beam Focus	Slide, Spot/Flood
Water & Dust Rating	IP67
Height	6.5"
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery Pack, 2 ft Heavy Duty USB Cord





USB Rechargeable ROVER[™] **Magnetic Flood Light Kit**

2112-21

Lumens	445 / 100
Modes	High, Low
Hands-Free	Dual Magnets
Water & Dust Rating	IP54
Height	6.0"
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord





USB Rechargeable **Low-Profile Headlamp Kit**

2115-21

Lumens	600 / 350 / 125 / 25
Modes	High, Medium, Low, Eco
Battery Position	Rear
Water & Dust Rating	IP54
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord, (4) Hard Hat Clips



POWERED BY
REDLITHIUM
000
RECHARGEABLE

USB Rechargeable **Pivoting Flashlight Kit**

2113-21

Lumens	500 / 400 / 100
Modes	Spot - High, Flood - High, Flood - Low
Spot Beam Distance	155 m
Pivoting Head	110°
Water & Dust Rating	IP54
Height	6.3"
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord

USB Rechargeable BEACON™ Hard Hat Light Kit

2116-21

Lumens	600 / 400, 200, 25 / 400
Modes	Spot/Flood, Flood - High/ Medium/Low, Spot - High
BEACON™ Mode	Steady & Blinking
Spot Beam Distance	125 m
Water & Dust Rating	IP54
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord, (2) Hard Hat Clips



USB Rechargeable ROVER™ **Pivoting Flood Light Kit**

2114-21

Lumens	550 / 250 / 100
Modes	High, Medium, Low
Pivoting Head	210°
Water & Dust Rating	IP54
Height	4.4"
Powered By	REDLITHIUM™ USB

Includes: (1) REDLITHIUM™ USB Battery, 2 ft Heavy Duty USB Cord





USB Rechargeable **Utility Hot Stick Light Kit**

2119-22

Lumens	350 / 100
Modes	Flood – High/Low
kV Rating	100kV
Water & Dust Rating	IP67
Height / Length	0.5" / 7.4"
Powered By	REDLITHIUM™ USB



Includes: (2) REDLITHIUM™ USB Batteries, 2 ft Heavy Duty USB Cord, REDLITHIUM™ USB Charger & Portable Power Source, 12V DC Vehicle Plug, 2.1A Wall Plug



Specifications:

Ar	mp Hours	2.4
Ce	ell Chemistry	LITHIUM-ION
Vo	oltage	4V





USB Rechargeable Portable Power Source and Charger

48-59-2012

Specifications:

Cell Chemistry	LITHIUM-ION
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes
USB Charging Port	2.1A USB Charging Port for External Devices
Height	3.9"

Includes: REDLITHIUM™ USB Portable Power Source and Charger, 2 ft Heavy Duty USB Cord

USB Rechargeable Portable Power Source and Charger Kit

48-59-2013

Specifications:

- p	
Cell Chemistry	LITHIUM-ION
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes
USB Charging Port	2.1A USB Charging Port for External Devices
Height	3.9"

Includes: (1) REDLITHIUM™ USB Battery, REDLITHIUM™ USB Portable Power Source and Charger, 2 ft Heavy Duty USB Cord

MILWAUKEE® Penlight

2105

Lumens	100
Water & Dust Rating	IP67
Height	5.4"
Powered By	(2) AAA

Includes: (2) AAA Batteries

Headlamp 2104

MILWAUKEE® Spot/Flood

Lumens	450 / 350, 150, 25 / 350
Modes	Spot/Flood, Flood - High/ Medium/Low, Spot
Spot Beam Distance	100 m
Water & Dust Rating	IP54
Powered By	(3) AAA

Includes: (4) Hard Hat Clips, (3) AAA Batteries

325L Focusing Flashlight

\$5000 	2107
	Lum
	Mod
	Spot
W	Bear
_	14/ 1

325 / 25 Lumens Modes High, Low Spot Beam Distance 115 m Beam Focus Slide, Spot/Flood Water & Dust Rating IP67 Height 5.0" Powered By (3) AAA

Includes: (3) AAA Batteries

2107S Also Available, Includes Holster

MILWAUKEE® Headlamp

2103	_
Lumens	350 / 150 / 25
Modes	High, Medium, Low
Impact Rating	2 m
Water & Dust Rating	IP54
Powered By	(3) AAA

Includes: (4) Hard Hat Clips, (3) AAA Batteries

ROVER[™] Magnetic Flood Light

Lumens	300 / 100
Modes	High, Low
Water & Dust Rating	IP54
Height	4.8"
Powered By	(2) AA

Includes: (2) AA Batteries





		2 - 3 PIECE KITS								4 - 8 PIECE KITS					
M12 [™]	22	52	52	22	22	52	7	22	22	22	g	42	24	24	28
COMBO KITS	2490-22	2491-22	2492-22	2494-22	2495-22	2497-22	2577-21	2582-22	2596-22	2598-22	2491-23	2493-24	2498-24	2499-24	2495-
Kit Tool Total	2	2	2	2	2	2	2	2	2	2	3	4	4	4	8
M12 [™] 1/4" Hex Screwdriver															
M12 FUEL™ 1/2" Hammer Drill/Driver															
M12™ 3/8" Hammer Drill/Driver															
M12 FUEL™ 1/2" Drill/Driver															
M12 [™] 3/8" Drill/Driver															
M12 [™] 3/8" Right Angle Drill/Driver															
M12 FUEL™ 1/4" Hex Impact Driver															
M12 [™] 1/4" Hex Impact Driver															
M12 FUEL™ SURGE™ 1/4" Hex Hydraulic Driver															
M12™ 3/8" Impact Wrench															
M12 [™] HACKZALL [®] Recip Saw															
M12™ Multi-Tool															
M12™ 1/4" Ratchet															
M12 [™] Copper Tubing Cutter															
M12™ TRAPSNAKE™ 6¹ Toilet Auger															
TRAPSNAKE™ 4' Urinal Auger Extension															
M12 [™] M-SPECTOR 360 [™] Rotating Inspection Scope															
M12 [™] Work Light															
M12™ Jobsite Radio															
Also Includes															
M12 [™] Charger															
M12 [™] REDLITHIUM [™] CP1.5 Battery Pack	2	2	2	2	2	2	1				2	2	2	2	2
M12 [™] REDLITHIUM [™] CP2.0 Battery Pack								1	1	1					
M12 [™] REDLITHIUM [™] XC3.0 Battery Pack															1
M12 [™] REDLITHIUM [™] XC4.0 Battery Pack								1	1	1					
Carrying Case															
Contractor Bag															




M12™ REDLITHIUM™ CP3.0/XC6.0

- Up to 3X More Run-Time
- Up to 20% More Power
- Over 2X More Life





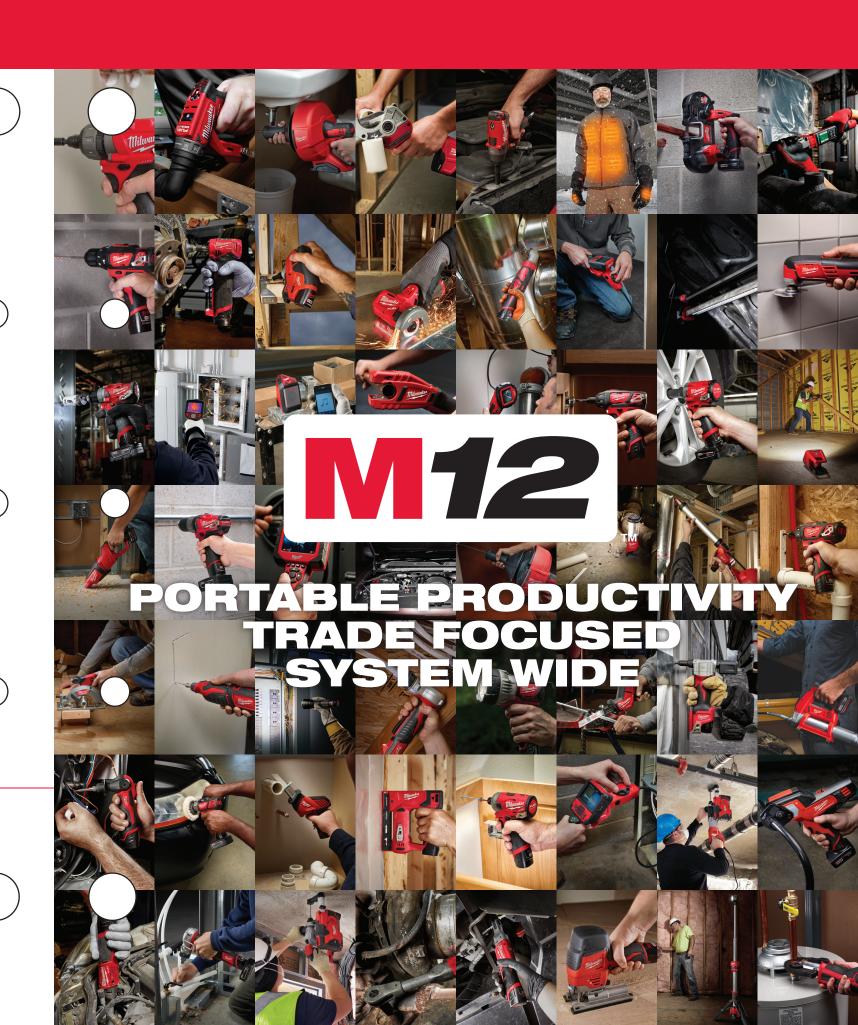













PERFORMANCE DRIVEN TRADE FOCUSED SYSTEM WIDE





ALL M18 TOOLS FIT M18 BATTERIES
200+ TOOLS




DRIVEN TO OUTPERFORM.

For the first time in power tool history, M18 FUEL™ products are delivering game-changing corded performance without the cord. The motors on MILWAUKEE® M18 FUEL™ tools are more powerful and energy efficient – outliving any other brand. To add to the revolutionary technology, M18 FUEL™ possesses the smartest electronics found in any power tool. REDLINK PLUS™ electronics manage an array of power requirements across 200+ M18™ tools using one common battery. MILWAUKEE® built, the M18™ Battery delivers cleaner, more consistent power, lasts longer and delivers more run-time in the harshest jobsite conditions.









POWERSTATE BRUSHLESS MOTOR

This best-in-class brushless motor works harder and lives longer than all leading competitors.

- MILWAUKEE® Designed and Built Brushless Motor
- Outperforms All Leading Competitors
- Longer Motor Life





PEDLINK PLUS™ INTELLIGENCE

The most advanced system of hardware and software in cordless power tool electronics today.

- Most Advanced Electronic System
 on the Market for Maximum Performance
- Total System Communication with Overload Protection Increases Tool Life



REDLITHIUM™ XC5.0 BATTERY PACK

Compatible with the entire M18™ System, it delivers more run-time, power and recharges than the competition.

- Most Durable Pack on the Market
- Over 2X More Recharges than Leading Competitor
- Fuel Gauge Displays Remaining Charge
- Operates Below -18°C / 0°F





lothing but **HEAVY DUTY.**°

M18 FUEL 1/2" Hammer Drill/Driver w/ ONE-KEY™ Kit

2806-22 (2806-20 Tool-Only)

Specifications:

1,200 in-lbs
0 - 550 / 0 - 2,000
0 – 32,000
3-Mode (Customizable)
1/2" All Metal Ratcheting
6.9" / 4.8 lbs

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18 FUEL

1/2" Hammer Drill/Driver Kit

2804-22 (2804-20 Tool-Only)

Specifications:

Peak Torque

Chuck type Length / Weight

RPM

-	
Peak Torque	1,200 in-lbs
RPM	0 - 550 / 0 - 2,000
BPM	0 – 32,000
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	6.9" / 4.8 lbs

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18™ 1/2" Hammer Drill/Driver Kit

2607-22, 2607-22CT (2607-20 Tool-Only)

Specifications:

Peak Torque	500 in-lbs
RPM	0 - 450 / 0 - 1,800
BPM	0 – 28,800
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	7.8" / 4.5 lbs

Includes: 2607-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2607-22CT** (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; All Kits Include: Multi-Voltage Charger, Carrying Case



Peak Torque	1,200 in-lbs
RPM	0 - 550 / 0 - 2,000
DRIVE CONTROL™	3-Mode (Customizable)
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	6.9" / 4.8 lbs

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case

M18™ Brushless 1/2" Hammer Drill/Driver Kit 2902-22 (2902-20 Tool-Only) Specifications: 725 in-lbs 0 - 550 / 0 - 1,800

7.0" / 4.6 lbs **Includes:** (2) M18[™] REDLITHIUM[™] XC4.0 Battery Packs, Belt Clip, Side Handle, Multi-Voltage Charger, Carrying Case

1/2" All Metal Ratcheting





Specifications:

-	
Peak Torque	1,200 in-lbs
RPM	0 - 550 / 0 - 2,000
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	6.9" / 4.8 lbs

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Side Handle, Multi-Voltage Charger, Carrying Case



M18™ 1/2" Compact **Drill/Driver Kit**

2606-22CT (2606-20 Tool-Only)

Specifications:

Peak Torque	500 in-lbs
RPM	0 - 450 / 0 - 1,800
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	7.3" / 3.8 lbs

Includes: (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs, Multi-Voltage Charger, Carrying Case



M18™ 3/8" Right Angle **Drill/Driver Kit**

2615-21, 2615-21CT (2615-20 Tool-Only)

Specifications:

-	
Peak Torque	125 in-lbs
RPM	0 – 1,500
Clutch Settings	11 Settings plus Drill Mode
Chuck Type	3/8" Single Sleeve
Head Profile	3-3/4"
Weight	4.3 lbs

Includes: 2615-21 (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack; 2615-21CT (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: Multi-Voltage Charger, Carrying Case



M18™ 1/2" Compact **Brushless Drill/Driver Kit**

2801-22CT (2801-20 Tool-Only)

Specifications:

Peak Torque	500 in-lbs
RPM	0 - 500 / 0 - 1,800
Chuck Type	1/2" All Metal Ratcheting
Length / Weight	6.5" / 3.7 lbs

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case





M18 FUEL Mud Mixer w/ 180° Handle Kit

2810-22 (2810-20 Tool-Only)

Specifications:

RPM	0 – 550
DRIVE CONTROL™	8-Speed Dial
Handle Type	180° Rotating Handle
Chuck Type	1/2" Keyed
Length / Weight	16.6" / 7.7 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Chuck Key, Multi-Voltage Charger, Contractor Bag





37



HOLE HAWG® 1/2" Right Angle Drill Kit

2707-22HD, 2707-22 (2707-20 Tool-Only)

Specifications:

RPM	0 – 1,200
Chuck Type	1/2" All Metal Chuck
Capacity	For Augers up to 1-1/4"; Self-Feed Bits up to 2"
Lenath / Weight	17.0" / 9.8 lbs

Includes: 2707-22HD (2) M18™ REDLITHIUM™ HD9.0

Battery Packs, Rapid Charger: 2707-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger All Kits Include: Chuck Key, Carrying Case

SUPER HAWG™ Right Angle Drill Kit w/ QUIK-LOK™ 2811-22 (2811-20 Tool-Only)

Specifications:

RPM	0 – 1,550
Chuck Type	7/16" Hex QUIK-LOK™
Capacity	For Self-Feed Bits up to 4-5/8"; Hole Saws up to 6-1/4"
Mechanical Clutch	In Low Speed
Length / Weight	20.5" / 14.9 lbs

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs, Side Handle, Rapid Charger, Contractor Bag

1-1/2" Magnetic Drill Kit 2787-22HD

Specifications:

Capacity	1-1/2" Annular Cutter; 1/2" Twist Bit
RPM	400 / 690
Magnet	Operates Without Electricity
Dimensions (L x W x H)	13.8" x 7.5" x 15.5"
Weight	30.5 lbs

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Packs, Magnetic Lubrication Tank, 3/4" Weldon to 1/2" Chuck Adapter, Chuck Key, (2) 1" Retracting Pilot Pins, Safety Strap, Rapid Charger, Carrying Case

HOLE HAWG® Right Angle Drill Kit w/ QUIK-LOK™

2708-22HD, 2708-22 (2708-20 Tool-Only) Specifications:

RPM	0 – 1,200	
Chuck Type	7/16" Hex QUIK-LOK™	
Capacity	For Augers up to 1-1/4"; Self-Feed Bits up to 2"	
Length / Weight	17.0" / 9.3 lbs	

Includes: 2708-22HD (2) M18[™] REDLITHIUM[™] HD9.0 Battery Packs, Rapid Charger; **2708-22** (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; All Kits Include: Carrying Case

M18 FUEL

SUPER HAWG™ 1/2" **Right Angle Drill Kit** 2809-22 (2809-20 Tool-Only)

Specifications:

39

RPM	0 - 1,550	
Chuck Type	1/2" All Metal Chuck	
Capacity	For Self-Feed Bits up to 4-5/8"; Hole Saws up to 6-1/4"	
Mechanical Clutch	In Low Speed	
Length / Weight	20.5" / 14.4 lbs	

Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC6.0 Battery Packs, Side Handle, Chuck Key, Rapid Charger, Contractor Bag

M18 FUEL 1-1/2" Lineman

Magnetic Drill Kit

2788-22HD

Specifications:

Capacity	1-1/2" Annular Cutter; 1/2" Twist Bit
RPM	400 / 690
Magnet	Operates Without Electricity
Dimensions (L x W x H)	13.8" x 7.5" x 15.5"
Weight	30.4 lbs

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs, Magnetic Lubrication Tank, 3/4" Weldon to 1/2" Chuck Adapter, Chuck Key, (2) 1" Retracting Pilot Pins, Safety Strap, 12V Inverter, Rapid Charger, Carrying Case

1-3/4" SDS Max Rotary Hammer w/ ONE-KEY™ Kit 2718-22HD, 2718-21HD (2718-20 Tool-Only)

Specifications:





Includes: 2718-22HD (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs; **2718-21HD** (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack

All Kits Include: Side Handle, Grease Tube, Rapid Charger,

M18 FUEL 1-9/16" SDS Max **Rotary Hammer Kit** 2717-22HD (2717-20 Tool-Only) Specifications:

	•		
RPM	0 – 440		
BPM	0 – 3,000		REDLITHIUM [*]
Impact Energy	5.0 ft-lbs		HIGH OUTPUT XC80
2-Mode Operation	Rotary Hammer	and Hamn	ner Only
Weight	13.8 lbs		

1-1/8" SDS Plus **Rotary Hammer Kit**

2715-22HD, 2715-22, 2715-22DE (2715-20 Tool-Only)

Specifications:

RPM	0 – 1,350	
BPM	0 - 5,000	
Impact Energy	3.3 ft-lbs	
3-Mode Operation	Rotary Hammer,	Hammer Only and Rotation Only
Weight	10.1 lbs	

Rapid Charger; 2715-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; 2715-22DE (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, HAMMERVAC™ Dedicated Dust Extractor, HEPA Filter, Replacement Nozzle, Multi-Voltage Charger;

OSHA
SOLUTION

GERTIL

All Kits Include: Side Handle, Depth Rod, Carrying Case

M18™ HAMMERVAC™ **Dedicated Dust Extractor**

2715-DE

Specifications:

	Compatibility	For use with 2715-20
	In-Line Dedicated Design	Engineered to Fit in the Most Confined Workspaces
	Adjustable Depth Stop and Ruler	Easily and Precisely Adjust for Accurate Hole Depths
	Replaceable Certified HEPA Filter	Filters 99.97% of Debris 0.3 Microns and Above
	Max Bit Size	5/8"

Includes: Replacement Nozzle and HEPA Filter



Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Packs,

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor

2712-DE

Side Handle, Depth Rod, Rapid Charger, Carrying Case

M18 FUEL

RPM	0 – 1,350
BPM	0 – 5,000
Impact Energy	3.3 ft-lbs
3-Mode Operation	Rotary Hammer, Hammer Only and Rotation Only
Weight	10.1 lbs

Includes: 2715-22HD (2) M18™ REDLITHIUM™ HD9.0 Battery Packs,

2605-22 (2605-20 Tool-Only)

BPM	0 – 4,800
Impact Energy	1.4 ft-lbs
3-Mode Operation	Hammer Only, Rotar
\Moight	7.2 lbc

Depth Rod, Multi-Voltage Charger, Carrying Case

Related Accessory: 2306-22 M12™ HAMMERVAC™ Universal Dust Extractor

M18 FLEL 1" SDS Plus **Rotary Hammer Kit**

2712-22, 2712-22DE (2712-20 Tool-Only)

Specifications:

RPIVI	0 - 1,400
BPM	0 – 4,900
Impact Energy	1.7 ft-lbs
3-Mode Operation	Rotary Hammer, Hammer Only and Rotation Only
Weight	9.4 lbs

Includes: 2712-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger; **2712-22DE** (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, HAMMERVAC™ Dedicated Dust Extractor, HEPA Filter, Replacement Nozzle, Multi-Voltage Charger;

All Kits Include: Side Handle, Depth Rod, Carrying Case

M18™ HAMMERVAC **Dedicated Dust Extractor**







Specifications:

Compatibility	For use with 2712-20
In-Line Dedicated Design	Engineered to Fit in the Most Confined Workspaces
Adjustable Depth Stop and Ruler	Easily and Precisely Adjust for Accurate Hole Depths
Replaceable Certified HEPA Filter	Filters 99.97% of Debris 0.3 Microns and Above
Max Bit Size	5/8"

Includes: Replacement Nozzle and HEPA Filter

M18 FUEL 1" SDS Plus D-Handle **Rotary Hammer Kit**

2713-22HD, 2713-22 (2713-20 Tool-Only)

Specifications:

Capacity	1"
Impact Energy	2.15 ft-lbs
RPM	0 – 1,500
BPM	0 - 4,400
Length / Weight	16.5" / 8.5 lbs

Includes: 2713-22HD (2) M18™ REDLITHIUM™ HD9.0 Battery Packs, Rapid Charger; 2713-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger;

All Kits Include: Side Handle, Depth Rod, Carrying Case

M18™ 7/8" SDS Plus **Rotary Hammer Kit**

Specifications:

RPIVI	0 - 1,400	
BPM	0 – 4,800	
Impact Energy	1.4 ft-lbs	
3-Mode Operation	Hammer Only, Rota	ary Hammer and Rotation Only
\Maiaht	7.0 lbo	

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Side Handle,

M18™ 5/8" SDS Plus **Rotary Hammer Kit** 2612-22, 2612-21 (2612-20 Tool-Only)

Specifications:

I II IVI	0 - 1,000	_
BPM	0 – 7,000	
Impact Energy	1.0 ft-lbs	
2-Mode Operation	Rotary Hammer and	Rotation Only
Weight	5.5 lbs	

Includes: 2612-22 (2) M18 $^{\text{\tiny{M}}}$ REDLITHIUM $^{\text{\tiny{M}}}$ XC3.0 Battery Packs; 2612-21 (1) M18™ REDLITHIUM™ XC3.0

All Kits Include: Side Handle, Depth Rod, Multi-Voltage Charger, Carrying Case

Related Accessory: 2306-22 M12[™] HAMMERVAC[™] Universal Dust Extractor

M18 FUEL

1/4" Hex Impact Driver w/ ONE-KEY™ Kit

2857-22, 2857-22CT (2857-20 Tool-Only)

Specifications:

Max Torque	2,000 in-lbs
IPM	0 – 4,300
RPM	0 – 3,600
DRIVE CONTROL™	4-Mode (Customizable)
Chuck Type	1/4" Hex
Single Hand Bit Insertion	Yes
Length / Weight	4.6" / 3.8 lbs

Includes: 2857-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs: **2857-22CT** (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case



1/4" Hex Impact Driver Kit

2853-22, 2853-22CT (2853-20 Tool-Only)

Specifications:

Max Torque	2,000 in-lbs
IPM	0 - 4,300
RPM	0 – 3,600
DRIVE CONTROL™	4-Mode
Chuck Type	1/4" Hex
Single-Handed Bit Insertion	Yes
Length / Weight	4.6" / 3.8 lbs

Includes: 2853-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; 2853-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case



M18 FUEL SURGE™ 1/4" Hex **Hydraulic Driver Kit**

2760-22, 2760-22CT (2760-20 Tool-Only)

Specifications:

specifications.	
Sustained Max Torque	450 in-lbs
IPM	0 – 4,000
RPM	0 – 3,000
DRIVE CONTROL™	4-Mode
Length / Weight	5.0" / 3.9 lbs

Includes: 2760-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs: 2760-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger,

M18™ Brushless 1/4" Hex **3-Speed Impact Driver**

2851-20 Tool-Only

Specifications:

Max Torque	1,600 in-lbs
IPM	0 – 4,200
RPM	0 – 3,400
Chuck Type	1/4" Hex
DRIVE CONTROL™	3-Mode
Length / Weight	5.1" / 2.0 lbs

Battery and Charger Sold Separately

Includes: Belt Clip



1/4" Hex Impact Driver Kit

2850-22CT (2850-20 Tool-Only)

Specifications:

Max Torque	1,600 in-lbs
IPM	0 – 4,200
RPM	0 – 3,400
Chuck Type	1/4" Hex
Length / Weight	5.1" / 2.9 lbs

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case

M18™ 1/4" Hex Compact **Impact Driver Kit**

2656-22CT (2656-20 Tool-Only) Specifications:

Max Torque	1,500 in-lbs
IPM	0 - 3,450
RPM	0 – 2,750

Includes: (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs,



M18™ 1/4" 2-Speed Impact Driver Kit

2657-22, 2657-22CT (2657-20 Tool-Only)

Specifications:

•	
Max Torque	1,500 in-lbs
IPM	0 – 3,450
RPM	0 – 2,750
Chuck Type	1/4" Hex Quick Change
Length / Weight	5.5" / 3.8 lbs

Includes: 2657-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; **2657-22CT** (2) M18™ REDLITHIUM™ CP1.5 Battery Packs: All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case









Fastening Torque (2-Mode) 30 / 60 ft-lbs Nut-Busting Torque 60 ft-lbs IPM 0 - 2,400 / 0 - 3,400RPM 0 - 1,500 / 0 - 2,250Anvil Type 3/8" Length / Weight 14.3" / 3.9 lbs **Includes: 2668-22** (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs;

M18™ Right Angle

Impact Driver Kit

Specifications:

Max Torque (2-Mode)

IDM

RPM

Anvil Type

Length / Weight

Specifications:

Auto Start Mode

Length / Weight

Contractor Bag

Screw Capacity: Up to 2"

Related Tool:

Related Accessory:

Compatible with all major screw brands

M18™ Right Angle

Specifications:

Impact Wrench Kit

2668-22, 2668-21CT (2668-20 Tool-Only)

2627-22 M18™ Cut Out Tool Kit Pg. 48

49-20-0001 MILWAUKEE® Collated Magazine

Belt Clip

2667-22, 2667-21CT (2667-20 Tool-Only)

350 / 675 in-lbs

1/4" Hex 14.1" / 3.9 lbs

Battery Packs; **2667-21CT** (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack;

All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

0 - 4,500

9.0" / 4.1 lbs **Includes: 2866-22** (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs;

Yes

Yes

All Kits Include: Belt Clip, PR2 Bit, Multi-Voltage Charger,

2866-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs;

Includes: 2667-22 (2) M18™ REDLITHIUM™ XC3.0

Drywall Screw Gun Kit

2866-22, 2866-22CT (2866-20 Tool-Only)

0 - 2,400 / 0 - 3,400

0 - 1,500 / 0 - 2,250

2668-21CT (1) M18™ REDLITHIUM™ CP1.5 Battery Pack: All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

1/2" Compact Impact Wrench w/ Pin Detent w/ ONE-KEY™ Kit

2759-22, 2759B-22 (2759-20, 2759B-20 Tool-Only)

Specifications:

Fastening Torque	220 ft-lbs
Nut-Busting Torque	220 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,500
DRIVE CONTROL™	4-Mode (Customizable)
Anvil Type	1/2" Pin Detent
Length / Weight	6.1" / 4.2 lbs

Includes: 2759-22 1/2" Compact Impact Wrench w/ Pin Detent w/ ONE-KEY™; 2759B-22 1/2" Compact Impact Wrench w/ Friction Ring w/ ONE-KEY™; **All Kits Include:** (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case



M18 FLEL

1/2" Compact Impact Wrench w/ Pin Detent Kit

2755-22, 2755B-22 (2755-20, 2755B-20 Tool-Only)

Specifications:

Fastening Torque	220 ft-lbs
Nut-Busting Torque	220 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,500
DRIVE CONTROL™	4-Mode
Anvil Type	1/2" Pin Detent
Length / Weight	6.1" / 4.2 lbs

Includes: 2755-22 1/2" Compact Impact Wrench w/ Pin Detent; 2755B-22 1/2" Compact Impact Wrench w/ Friction Ring; All Kits Include: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

M18™ 1/2" Compact **Impact Wrench Kit**

2659-22 (2659-20 Tool-Only)

Specifications:

	•
Fastening Torque	183 ft-lbs
Nut-Busting Torque	183 ft-lbs
IPM	0 – 3,350
RPM	0 – 2,450
Anvil Type	1/2" Pin Detent
Length / Weight	6.0" / 4.1 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case





M18 FLIEL

3/8" Impact Wrench w/ Friction Ring w/ ONE-KEY™ Kit

2758-22, 2758-22CT (2758-20 Tool-Only)

Specifications:

210 ft-lbs
210 ft-lbs
0 – 3,200
0 – 2,500
4-Mode (Customizable)
3/8" Friction Ring
5.9" / 4.2 lbs

Includes: 2758-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; 2758-22CT (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs: All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

M18 FLEL

3/8" Compact Impact Wrench w/ Friction Ring Kit

2754-22, 2754-22CT (2754-20 Tool-Only)

Specifications:

Fastening Torque	210 ft-lbs
Nut-Busting Torque	210 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,500
DRIVE CONTROL™	4-Mode
Anvil Type	3/8" Friction Ring
Length / Weight	5.9" / 4.2 lbs

Includes: 2754-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; 2754-22CT (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Bit Holder, Multi-Voltage Charger, Carrying Case

M18™ 3/8" Compact **Impact Wrench Kit**

2658-22, 2658-22CT (2658-20 Tool-Only)

Specifications:

Fastening Torque	167 ft-lbs
Nut-Busting Torque	167 ft-lbs
IPM	0 – 3,350
RPM	0 – 2,450
Anvil Type	3/8" Friction Ring
Length / Weight	6.0" / 4.1 lbs

Includes: 2658-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2658-22CT** (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case

1/2" Mid-Torque Impact **Wrench w/ Pin Detent Kit**

2860-22 (2860-20 Tool-Only)

Specifications:

-	
Fastening Torque	450 ft-lbs
Nut-Busting Torque	600 ft-lbs
IPM	0 – 3,000
RPM	0 – 2,400
Anvil Type	1/2" Pin Detent
Length / Weight	6.7" / 5.3 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



1/2" Mid-Torque Impact **Wrench w/ Friction Ring Kit**

2861-22 (2861-20 Tool-Only)

Specifications:

Fastening Torque	450 ft-lbs
Nut-Busting Torque	600 ft-lbs
IPM	0 – 3,000
RPM	0 – 2,400
Anvil Type	1/2" Friction Ring
Length / Weight	6.7" / 5.3 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



M18 FLEL

3/8" Mid-Torque Impact Wrench w/ Friction Ring Kit

2852-22, 2852-22CT (2852-20 Tool-Only)

Specifications:

Fastening Torque	450 ft-lbs
Nut-Busting Torque	600 ft-lbs
IPM	0 – 3,200
RPM	0 – 2,300
DRIVE CONTROL™	3-Mode
Anvil Type	3/8" Friction Ring
Length / Weight	6.7" / 5.3 lbs

Includes: 2852-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; **2852-22CT** (2) M18™ REDLITHIUM™ CP2.0 Battery Packs; All Kits Include: Belt Clip, Multi-Voltage Charger, Carrying Case



1^{II} High Torque Impact Wrench w/ ONE-KEY™ Kit 2867-22 (2867-20 Tool-Only)

Specifications

Specifications:	
Fastening Torque	1,500 ft-lbs
Nut-Busting Torque	1,800 ft-lbs
IPM	0 – 2,450
RPM	0 - 1,650
DRIVE CONTROL™	4 Modes (Customizable)
Length / Weight	10.9" / 12.9 lbs



Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Packs, (1) Tool-Free Adjustable Handle, (1) Lanyard Loop, Rapid Charger, Contractor Bag



3/4" High Torque Impact **Wrench w/ Friction Ring** w/ ONE-KEY™ Kit

2864-22 (2864-20 Tool-Only)

Specifications:

•	
Fastening Torque	1,200 ft-lbs
Nut-Busting Torque	1,600 ft-lbs
IPM	0 – 1,850
RPM	0 – 1,850
DRIVE CONTROL™	4 Modes (Customizable)
Length / Weight	8.6" / 7.9 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Belt Clip, Multi-Voltage Charger, Carrying Case



1/2" High Torque Impact Wrench w/ Pin Detent Kit

2766-22 (2766-20 Tool-Only)

Specifications:

-	
Fastening Torque	750 ft-lbs
Nut-Busting Torque	1,100 ft-lbs
IPM	0 – 2,400
RPM	0 – 1,850
DRIVE CONTROL™	4-Modes w/ Bolt Removal Mode
Anvil Type	1/2" Pin Detent
Length / Weight	8.1" / 7.1 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18™ 3/4" High Torque Impact **Wrench w/ Friction Ring Kit**

2664-22 (2664-20 Tool-Only)

Specifications:

_	
Fastening Torque	525 ft-lbs
Breakaway Torque	700 ft-lbs
IPM	0 – 2,200
RPM	0 – 1,900
Anvil Type	3/4" Friction Ring
Length / Weight	9.0" / 6.8 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18™ 1/2" High Torque Impact Wrench w/ Pin Detent Kit

2662-22 (2662-20 Tool-Only)

Specifications:

Fastening Torque	450 ft-lbs
Breakaway Torque	640 ft-lbs
IPM	0 – 2,200
RPM	0 – 1,900
Anvil Type	1/2" Pin Detent
Length / Weight	8.9" / 6.7 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18 FUEL

1/2" Ext. Anvil Controlled Torque Impact Wrench w/ ONE-KEY™ Kit

2769-22 (2769-20 Tool-Only)

Specifications:

Fastening Torque	750 ft-lbs
Nut-Busting Torque	1,100 ft-lbs
IPM	0 – 2,400
RPM	0 – 1,800
DRIVE CONTROL™	4-Modes (Customizable)
Anvil Type	1/2" Friction Ring
Length / Weight	10.1" / 5.8 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs. Multi-Voltage Charger, Contractor Bag

M18 FUEL

1/2" High Torque Impact Wrench w/ Friction Ring w/ ONE-KEY™ Kit

2863-22 (2863-20 Tool-Only)

Specifications:

Fastening Torque	1,000 ft-lbs
	,
Nut-Busting Torque	1,400 ft-lbs
IPM	0 – 2,100
RPM	0 – 1,750
DRIVE CONTROL™	4-Modes (Customizable)
Anvil Type	1/2" Friction Ring
Length / Weight	8.4" / 7.6 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18 FUEL

1/2" High Torque Impact Wrench w/ Pin Detent w/ ONE-KEY™ Kit

2862-22 (2862-20 Tool-Only)

Specifications:

	_		
	Fastening Torque	750 ft-lbs	
	Nut-Busting Torque	1,100 ft-lbs	<u></u>
	IPM	0 – 2,400	
\	RPM	0 – 1,800	
)	DRIVE CONTROL™	4-Modes (Customizable)	(C
/	Anvil Type	1/2" Pin Detent	
	Length / Weight	8.1" / 7.2 lbs	

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case

M18 FUEL 1/2" High Torque Impact Wrench w/ Friction Ring Kit

2767-22 (2767-20 Tool-Only)

Specifications:

Fastening Torque	1,000 ft-lbs
Nut-Busting Torque	1,400 ft-lbs
IPM	0 – 2,100
RPM	0 – 1,750
DRIVE CONTROL™	4-Modes w/ Bolt Removal Mode
Anvil Type	1/2" Friction Ring
Length / Weight	8.4" / 7.5 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger, Carrying Case



43

M18™ 1/2" High Torque Impact **Wrench w/ Friction Ring Kit**

2663-22 (2663-20 Tool-Only)

Specifications:

Fastening Torque	450 ft-lbs
Breakaway Torque	640 ft-lbs
IPM	0 – 2,200
RPM	0 – 1,900
Anvil Type	1/2" Friction Ring
Length / Weight	8.9" / 6.7 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Multi-Voltage Charger, Carrying Case



M18 FUEL 7/16" Hex Utility **High Torque Impact Wrench** w/ ONE-KEY™ Kit

2865-22 (2865-20 Tool-Only)

Specifications:

=	
Max Torque	750 ft-lbs
IPM	0 – 2,800
RPM	0 – 2,200
Bit Insertion	QUIK-LOK™ Single-Handed Bit Insertion
DRIVE CONTROL™	4 Modes (Customizable)
High Voltage Rating	69kV
Length / Weight	8.2" / 7.4 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Lanyard Loop, 12V Inverter, Multi-Voltage Charger, Contractor Bag

M18™ 7/16" Hex Utility **High Torque Impact Kit**

2665-22 (2665-20 Tool-Only) Specifications:

Specifications:		
Fastening Torque	350 ft-lbs	
IPM	0 – 2,200	
RPM	0 – 1,900	
Anvil Type	7/16" Hex	
Length / Weight	9.5" / 7.0 lbs	

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs. Multi-Voltage Charger, Contractor Bag



M18 FLIEL **SUPER SAWZALL® Recip Saw Kit**

2722-21HD (2722-20 Tool-Only) Specifications:

SPM	0-3,000
Stroke Length	1-1/4" HIGH OU
Blade Clamp	QUIK-LOK™ (Accepts all SAWZALL® Blades)
Speeds	5-Speeds
Orbital Action	Selectable; On/Off
Anti-Vibration	Yes
Weight	12.2 lbs

Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] HD12.0 Battery Pack, Blade, Rapid Charger, Contractor Bag

M18 FUEL SAWZALL® Recip Saw w/ ONE-KEY™ Kit

2721-22 (2721-20 Tool-Only)

Specifications:

SPM	0 – 3,000
Stroke Length	1-1/8"
Blade Clamp	Lever-Action QUIK-LOK [™] (Accepts all SAWZALL® Blades)
Cut Control	4-Mode (Customizable)
Anti-Vibration	Yes
Weight	8.9 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Blade, Multi-Voltage Charger, Carrying Case

M18 FUEL SAWZALL® Recip Saw Kit

2720-22HD, 2720-22, 2720-21 (2720-20 Tool-Only)

Specifications:

SPM	0 – 3,000
Stroke Length	1-1/8"
Blade Clamp	Lever-Action QUIK-LOK™ (Accepts all SAWZALL® Blades)
Anti-Vibration	Yes
Weight	9.8 lbs

Includes: 2720-22HD (2) M18™ REDLITHIUM™ HD9.0 Battery Packs, Rapid Charger; 2720-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; 2720-21 (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger;

All Kits Include: Blade, Carrying Case



2621-22, 2621-21 (2621-20 Tool-Only)



Includes: 2621-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs; 2621-21 (1) M18™ REDLITHIUM™ XC3.0 Battery Pack;

All Kits Include: Blade, Multi-Voltage Charger, Carrying Case

7-1/4" Circular Saw Kit

2732-21HD (2732-20 Tool-Only)

Specifications:

RPM	5,800
Bevel Capacity	50°
Cut Capacity	2-1/2" at 90°; 1-7/8 " at 45°
Arbor	5/8"
Blade Guards	Magnesium
Weight	12.0 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Circular Saw Blade, Wrench, Rapid Charger, Contractor Bag

M18 FUEL **HACKZALL® One-Handed Recip Saw Kit** 2719-21 (2719-20 Tool-Only)

Specifications:

-	
SPM	3,000
Stroke Length	7/8"
Blade Clamp	QUIK-LOK [™] (Accepts all SAWZALL® Blades)
Weight	5.6 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack. Blade. Multi-Voltage Charger, Contractor Bag

7-1/4" Rear Handle **Circular Saw Kit**

2830-21HD (2830-20 Tool-Only) Specifications:

RPM	5,800
Bevel Capacity	53°
Cut Capacity	2-1/2" at 90°; 1-7/8 " at 45°
Arbor	Diamond
Blade Guards	Magnesium
Weight	10.0 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Circular Saw Blade, Wrench, Rapid Charger, Contractor Bag

M18™ Brushless 7-1/4" Circular Saw Kit

2631-21 (2631-20 Tool-Only)

Specifications:

RPM	5,000
Bevel Capacity	50°
Cut Capacity	2-1/2" at 90°; 1-7/8" at 45°
Arbor	5/8"
Blade Guards	Magnesium
Weight	8.8 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Circular Saw Blade, Wrench, Multi-Voltage Charger, Contractor Bag

M18™ HACKZALL® **One-Handed Recip Saw Kit**

2625-21, 2625-21CT (2625-20 Tool-Only)

Specifications:

opoomounome	·•	10000
SPM	0 – 3,000	
Stroke Length	3/4"	
Blade Clamp	QUIK-LOK [™] (Accepts all SAWZALL® Blades	S)
Anti-Vibration	Yes	
Weight	5.6 lbs	

Includes: 2625-21 (1) M18™ REDLITHIUM™ XC3.0 Battery Pack; **2625-21CT** (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack; All Kits Include: Blade, Multi-Voltage Charger, Contractor Bag

6-1/2" Circular Saw Kit

2730-22, 2730-21 (2730-20 Tool-Only)

Specifications:

•	
RPM	5,000
Bevel Capacity	50°
Cut Capacity	2-3/16" at 90°; 1-5/8" at 45°
Arbor	5/8"
Blade Guards	Magnesium
Weight	8.0 lbs

Includes: 2730-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs; **2730-21** (1) M18™ REDLITHIUM™ XC5.0 Battery Pack; All Kits Include: Circular Saw Blade, Wrench, Multi-Voltage Charger, Contractor Bag





SYSTEM WIDE M18

M18™ 6-1/2" **Circular Saw Kit**

2630-22 (2630-20 Tool-Only) Specifications:

-	
RPM	3,500
Bevel Capacity	50°
Cut Capacity	2-1/8" at 90°; 1-9/16" at 45°
Arbor	5/8"
Blade Guards	Plastic
Weight	8.5 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Circular Saw Blade, Rip Fence, Wrench, Multi-Voltage Charger, Contractor Bag

M18™ Random Orbit Sander Kit

2648-21 (2648-20 Tool-Only)

Specifications:

-		
OPM	12,000	
Variable Speed	7,000 - 12,000 OPM	4
Pad Size	5.0"	
Orbit Diameter	3/32"	
Weight	2.7 lbs	

Includes: (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, (2) Pieces of 80 Grit Sandpaper, Universal Hose Adapter, Universal Hook & Loop Pad, Multi-Voltage Charger, Contractor Bag



M18™ 3-1/4" Planer Kit

2623-21 (2623-20 Tool-Only)

Specifications:

specifications	•	
RPM	14,000	1 1
Planing Width	3-1/4"	
Max Planing Depth	5/64"	
Rabbet Depth	27/64"	
Length / Weight	12.4" / 7.8 lbs	

Includes: (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack, Bevel Edge Guide, (2) Double-Edged Carbide Blades, Multi-Voltage Charger, Contractor Bag

M18 FLEL **Compact Router**

2723-20 Tool-Only

Specifications:

RPM	10,000 – 31,000
Speeds	6
Collet Size	1/4"
Adjustable Range	1.5"
Height / Weight	6.9 / 3.0 lbs

Battery and Charger Sold Separately

Includes: Fixed Base, Straight Edge Guide, 5-3/4" Template Bushing Sub-base plate, Dust Shroud, 11/16" Collet Wrench, 7/16" Spindle Wrench

Related Accessories: 48-10-5601 Compact Router Plunge Base; 48-10-5602 Compact Router Offset Base



D-Handle Jig Saw Kit

2737-21 (2737-20 Tool-Only)

Specifications:

SPM	3,500
Stroke Length	1"
Bevel Capacity	45°
Blade Clamp	Lever-Action QUIK-LOK™ T-Shank
Orbital Settings	4
Weight	6.4 lbs

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, Jig Saw Blade, Dust Collection Tube, Shoe Guard, Anti-Splinter Guard, Dust Cover, Wrench, Multi-Voltage Charger, Carrying Case





Specifications:

3,500
1"
45°
Lever-Action QUIK-LOK™ T-Shank
4
4.6 lbs

Battery and Charger Sold Separately

Includes: Jig Saw Blade, Dust Collection Tube, Shoe Guard, Anti-Splinter Guard, Dust Cover, LED Cover, Wrench

M18™ Multi-Tool Kit

2626-22 (2626-20 Tool-Only)

Specifications:

Speed Settings	12
OPM	11,000 – 18,000
Universal Adapter	Yes
Tool-Free Accessory Change	Yes
Length / Weight	14.0" / 4.2 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Wood Cutting Blade, Sanding Pad, (5) Assorted Sanding Sheets, Multi-Voltage Charger, Contractor Bag

M18™ 10 oz Caulk and **Adhesive Gun Kit**

2641-21CT (2641-20 Tool-Only)

Specifications: Force 950 lbs Inches Per Minute 0 - 21Speed Settings Auto-Reverse Anti-Drip Yes Weight 5.8 lbs

Includes: (1) M18™ REDLITHIUM™ CP1.5 Battery Pack. 10 oz Carriage, M18™ 10 oz Plunger Rod and Piston Assembly, Multi-Voltage Charger

M18™ 20 oz Aluminum Barrel Sausage Style Caulk & Adhesive Gun Kit

2642-21CT

Specifications:

Force	950 lbs
Inches Per Minute	0 – 21
Speed Settings	6
Auto-Reverse Anti-Drip	Yes
Weight	6.5 lbs

Includes: (1) M18™ REDLITHIUM™ CP1.5 Battery Pack, 20 oz Aluminum Sausage Style Barrel, M18™ 20 oz Plunger Rod and Piston Assembly, Nozzle, Multi-Voltage Charger

M18™ 20 oz Clear Barrel Sausage Style Caulk & Adhesive Gun Kit

2643-21CT

Specifications:

Force	950 lbs
Inches Per Minute	0 – 21
Speed Settings	6
Auto-Reverse Anti-Drip	Yes
Weight	6.6 lbs

Includes: (1) M18[™] REDLITHIUM[™] CP1.5 Battery Pack, 20 oz Clear Sausage Style Barrel, M18™ 20 oz Plunger Rod and Piston Assembly, Nozzle, Multi-Voltage Charger

M18™ Cut Out Tool Kit

2627-22, 2627-22CT (2627-20 Tool-Only)

Specifications

Specifications:	_
RPM	28,000
Tool-Free Depth Adjustment	Yes
LED Light	Yes
Belt Clip	Yes
Length / Weight	8.9" / 1.8 lbs

Includes: 2627-22 (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs; **2627-22CT** (2) M18[™] REDLITHIUM[™] CP1.5 Battery Packs; All Kits Include: Belt Clip, (2) 1/8" Drywall Bits, 1/8" Collet, 1/4" Collet, Wrench, Multi-Voltage Charger, Contractor Bag

Related Tool:

2866-22 M18 FUEL™ Drywall Screw Gun Kit Pg. 42

Caulk Gun Accessories

Compatible with 2641-21CT, 2642-21CT, and 2643-21CT

31-12-0700 Caulk Gun Nozzle - Black:

48-08-1076 M18[™] 10 oz Caulk and Adhesive Gun Conversion Kit;

48-08-1091 20 oz Aluminum Barrel Kit; **48-08-1093** M18[™] 20 oz Aluminum Barrel Sausage Style Caulk

and Adhesive Gun Conversion Kit;

48-08-1094 M18™ 20 oz Clear Barrel Sausage Style Caulk

and Adhesive Gun Conversion Kit;

48-08-1095 M18™ Quart Caulk and Adhesive Gun Conversion Kit;

48-08-1096 20 oz Clear Barrel Kit





M18 FUEL 10" Dual Bevel Sliding

Compound Miter Saw Kit 2734-21HD (2734-20 Tool-Only)

Specifications:

Blade Size	10"
No Load RPM	4,000
Max Bevel Angle	48° / 48°
Max Miter Angle	50° / 60°
Max Vertical Capacity	5-3/4"
Max Horizontal Capacity	2x12
Weight	47.0 lbs



Includes: (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Pack, Blade Wrench, Carbide Tipped Blade, Clamp, Dust Bag, Rapid Charger

M18 FUEL

7-1/4" Dual Bevel Sliding **Compound Miter Saw Kit** 2733-21 (2733-20 Tool-Only)

Specifications:

•	
Blade Size	7-1/4"
No Load RPM	5,000
Max Bevel Angle	48° / 48°
Max Miter Angle	48° / 48°
Max Vertical Capacity	3-1/2"
Max Horizontal Capacity	2x8
Weight	28.0 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Blade Wrench, Blade, Clamp, Multi-Voltage Charger



RPIVI	6,300	
Blade Size	8-1/4"	
Arbor Size	5/8"	REDLITHIUM
Max Bevel	47°	HIGH OUTPUT HD120
Cut Depth	2-1/2" at 90°;	1-3/4" at 45°
Rip Capacity	24" Left of Bla	de; 12" Right of Blade
Weight	45.0 lbs	

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Blade, Wrench, Anti-Kickback Pawls, Guard. Riving Knife, Fence, Push Stick, Miter Gauge, Rapid Charger

M18 FUEL

M18 FUEL

Specifications:

8-1/4" Table Saw

w/ ONE-KEY™ Kit

2736-21HD (2736-20 Tool-Only)

12" Dual Bevel Sliding Compound Miter Saw w/ ONE-KEY™ Kit

2739-21HD (2739-20 Tool-Only)

Specifications:

-p	
Blade Size	12"
No Load RPM	3,500
Max Bevel Angle	48° / 48°
Max Miter Angle	50° / 60°
Max Vertical Capacity	6-3/4"
Max Horizontal Capacity	2x14
Weight	47.6 lbs



Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Blade, Clamp, Handles, Rapid Charger





M18 FUEL **30° Framing Nailer Kit** 2745-21 (2745-20 Tool-Only) **Specifications:**

M18 FUEL

Specifications:

Collation Angle

Nail Collation

Magazine Size

Max Fire Rate

Firing Modes

Nail Size

2744-21 (2744-20 Tool-Only)

21° Framing Nailer Kit

21° Round Head Nail

3 Nails per Second

Sequential or Contact Actuation

2" - 3-1/2"

20° - 22°

45 Nails

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Rafter Hook, Hex Key, Multi-Voltage Charger, Contractor Bag

Related Accessory: 48-08-2744 21° Framing Nailer Extended Capacity Magazine

Collation Angle	30° Clipped or Full Head Nail
Nail Size	2" - 3-1/2"
Nail Collation	30° – 34°
Magazine Size	57 Nails
Max Fire Rate	3 Nails per Second
Firing Modes	Sequential or Contact Actuation

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Rafter Hook, Hex Key, Multi-Voltage Charger, Contractor Bag

Related Accessory: 48-08-2745 30° Framing Nailer Extended Capacity Magazine









M18 FUEL **18 Gauge Brad Nailer Kit**

2746-21CT (2746-20 Tool-Only)

Specifications:

opcomoations:	
Nail Diameter	18 Gauge
Nail Size	5/8" - 2-1/8"
Magazine Size	110 Nails
Max Fire Rate	3 Nails per Second
Magazine Loading	Side Load
Firing Modes	Sequential or Contact Actuation

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Reversible Belt Hook, Multi-Voltage Charger, Contractor Bag



M18 FUEL 18 Gauge 1/4" Narrow Crown Stapler Kit

2749-21CT (2749-20 Tool-Only) **Specifications:**

-	
Staple Diameter	18 Gauge
Staple Crown Size	1/4"
Staple Length	3/8" - 1-1/2"
Magazine Size	108 Staples
Max Fire Rate	4 Staples per Second
Magazine Loading	Front Load

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Reversible Belt Hook, Multi-Voltage Charger, Contractor Bag



M18 FUEL 16 Gauge Straight Finish Nailer Kit 2741-21CT (2741-20 Tool-Only)

Specifications:

Nail Diameter	16 Gauge
Nail Size	3/4" - 2-1/2"
Nail Collation Angle	0°
Magazine Size	110 Nails
Max Fire Rate	3 Nails per Second
Magazine Loading	Bottom Load
Length / Weight	11.9" / 7.2 lbs

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag







16 Gauge Angled Finish Nailer Kit

2742-21CT (2742-20 Tool-Only)

Specifications:

Nail Diameter	16 Gauge
Nail Size	1-1/4" - 2-1/2"
Nail Collation Angle	20°
Magazine Size	110 Nails
Max Fire Rate	3 Nails per Second
Magazine Loading	Bottom Load
Length / Weight	11.9" / 7.2 lbs

Includes: (1) M18[™] REDLITHIUM[™] CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag



9" Cut-Off Saw

2786

2786-22HD (2786-2	20 Tool-Only)		Milwank
Specification RPM	ns: 6,600	?	
Blade Size	9"		REDL
Arbor Size	7/8"	HIG	GH OUT

I II IVI	0,000	
Blade Size	9"	REDLITH
Arbor Size	7/8"	HIGH OUTPU
Cut Depth	3.4"	
Load Indicator Light	Yes	
Blade Brake	RAPIDSTOP™	
Weight	10.6 lbs	

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Abrasive Blade, Diamond Blade, Wrench, Hex Key, Rapid Charger



M18™ SWITCH TANK™ 4-Gallon **Backpack Water Supply Kit**

2820-21WS

Specifications:

Tank Capacity	4-Gallon
Pump Type	Dual Diaphragm Pump
PSI Range	20 - 60 PSI (5 Modes)
Flow Rate Range	0.16 - 1.13 Gal/Min
Dry Weight	18.5 lbs

Includes: M18™ SWITCH TANK™ Powered Base, SWITCH TANK™ 4-Gallon Water Supply Tank Assembly, (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, 10' Hose w/ Quick-Connect, Water Spray Nozzle, Multi-Voltage Charger



M18 FLEL

15 Gauge Finish Nailer Kit

2743-21CT (2743-20 Tool-Only)


Specifications:

-	
Nail Diameter	15 Gauge
Nail Size	1-1/4" - 2-1/2"
Nail Collation Angle	34°
Magazine Size	110 Nails
Max Fire Rate	3 Nails per Second
Magazine Loading	Bottom Load
Length / Weight	11.9" / 7.2 lbs

Includes: (1) M18[™] REDLITHIUM[™] CP2.0 Battery Pack, Multi-Voltage Charger, Contractor Bag





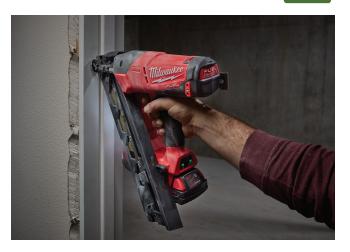

M18™ SWITCH TANK™ 4-Gallon Backpack Concrete Sprayer Kit 2820-21CS

Specifications:

_	
Tank Capacity	4-Gallon
Pump Type	Dual Diaphragm Pump
PSI Range	20 - 120 PSI (5 Modes)
Spray Distance	Up to 25'
Flow Rate Range	0.14 - 0.82 Gal/Min
Dry Weight	18.3 lbs

Includes: M18[™] SWITCH TANK[™] Powered Base, SWITCH TANK[™] 4-Gallon Concrete Sprayer Tank Assembly, (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, Adjustable Nozzle, Fan Nozzle, Multi-Voltage Charger

SWITCH TANK[™] Accessories

Compatible with 2820-20

Related Accessories:

49-16-28WS SWITCH TANK™ 4-Gallon Water Supply Tank Assembly; 49-16-28CS SWITCH TANK™ 4-Gallon Concrete Sprayer Tank Assembly; 49-16-28PS SWITCH TANK™ 4-Gallon Sprayer Tank Assembly





Deep Cut Band Saw Kit 2729-22, 2729-21 (2729-20 Tool-Only)

Hang Hook

Weight

SFPM 0 - 3805" x 5" **Cut Capacity** Shoe Tool-Free LED Light Yes

Specifications:

Includes: 2729-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs; 2729-21 (1) M18™ REDLITHIUM™ XC5.0 Battery Pack;

Yes

15.9 lbs

All Kits Include: Blade, Multi-Voltage Charger, Carrying Case



Compact Dual-Trigger **Band Saw Kit**

2829S-22

Specifications:

SFPM	0 – 540
Cut Capacity	3-1/4" x 3-1/4"
Shoe	Tool-Free Locking
LED Light	Yes
Hang Hook	Yes
Dual-Trigger Design	Yes
Weight	7.7 lbs

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Packs, Set of Band Saw Blade Covers, Blade, Rapid Charger, Contractor Bag

Band Saw Accessories

Deep Cut Band Saw Accessory:

Compatible with 2729-20, 2729S-22

49-90-2729 Deep Cut Band Saw Blade Covers

Compact Band Saw Accessories:

Compatible with 2829-20, 2829S-20

49-90-2829 Compact Band Saw Blade Covers; 49-90-2029 Compact Band Saw Reamer Attachment



M18 FUEL Deep Cut Dual-Trigger **Band Saw Kit**

2729S-22 (2729S-20 Tool-Only)

Specifications:

-	
SFPM	0 – 380
Cut Capacity	5" x 5"
Shoe	Tool-Free Locking
LED Light	Yes
Hang Hook	Yes
Dual-Trigger Design	Yes
Weight	13.8 lbs

Includes: (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Set of Band Saw Blade Covers, Blade, Multi-Voltage Charger, Contractor Bag

Compact Band Saw Kit

2829-22 (2829-20 Tool-Only)

Specifications:

•	
SFPM	0 – 540
Cut Capacity	3-1/4" x 3-1/4"
Shoe	Tool-Free Locking
LED Light	Yes
Hang Hook	Yes
Dual-Trigger Design	No
Weight	7.7 lbs

Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Packs, Blade, Rapid Charger, Contractor Bag





M18 FUEL **Metal Cutting Circular Saw Kit**

2782-22 (2782-20 Tool-Only)

Specifications:

RPM	3,900
Blade Size	5-3/8" - 5-7/8"
Arbor Size	20 mm
Hang Hook	Yes
Length / Weight	4.7" / 6.5 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, 30T Blade, Multi-Voltage Charger, Contractor Bag



51

M18 FUEL 7" / 9" Large Angle Grinder Kit

2785-22HD, 2785-21HD (2785-20 Tool-Only)

Specifications:

•	
RPM	6,600
Switch Type	Dual-action Trigger
Overload Protection	Yes
Electronic Clutch	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	18.5" / 11.9 lbs



Includes: 2785-22HD (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs; **2785-21HD** (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack;

All Kits Include: 9" T27 Guard, Anti-Vibration Side Handle, Back Flange, Dust Vent Clip, FIXTEC™ Nut, Spanner Wrench, Rapid Charger, Carrying Case



4-1/2" - 6" Braking Grinder Kit Paddle Switch, No-Lock


Specifications

Specifications:	
RPM	9,000
Switch Type	Paddle, No-Lock
Brake	Yes
Overload Protection	Yes
Electronic Clutch	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	15.0" / 5.3 lbs

2980-22, 2980-21 (2980-20 Tool-Only)

Includes: 2980-22 (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs; 2980-21 (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Pack;

All Kits Include: T27 Guard, Side Handle, Back Flange, FIXTEC™ Nut, Wrench, Rapid Charger, Contractor Bag

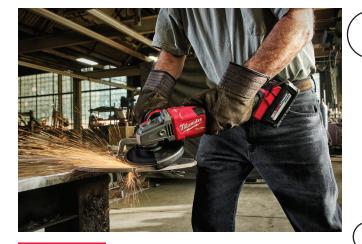

4-1/2" - 6" Braking Grinder Kit Slide Switch, Lock-On

2981-22, 2981-21 (2981-20 Tool-Only)

Specifications:

RPM	9,000
Switch Type	Slide, Lock-On
Brake	Yes
Overload Protection	Yes
Electronic Clutch	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	15.0" / 5.3 lbs

Includes: 2981-22 (2) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6.0 Battery Packs; **2981-21** (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC6 0 Battery Pack

All Kits Include: T27 Guard, Side Handle, Back Flange, FIXTEC™ Nut, Wrench, Rapid Charger, Contractor Bag



4-1/2" / 5" Grinder **Paddle Switch, No-Lock Kit** 2780-22HD, 2780-22, 2780-21 (2780-20 Tool-Only)

Specifications:

RPM	8,500
Switch Type	Paddle No-Lock
Power to Grind	Yes
Overload Protection	Yes
Electronic Clutch	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	15.0" / 8.2 lbs

Includes: 2780-22HD (2) M18™ REDLITHIUM™ HD9.0 Battery Packs, Rapid Charger; **2780-22** (2) M18" REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; **2780-21** (1) M18™ REDLITHIUM™ XC5.0 Battery Pack,

All Kits Include: Carrying Case



2781-22HD, 2781-22, 2781-21 (2781-20 Tool-Only)

Specifications:

opoomoanomo.	
RPM	8,500
Switch Type	Slide with Lock-On
Power to Grind	Yes
Overload Protection	Yes
Electronic Clutch	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	15.0" / 8.2 lbs

Includes: 2781-22HD (2) M18[™] REDLITHIUM[™] HD9.0 Battery Packs, Rapid Charger; 2781-22 (2) M18™ REDLITHIUM™ XC5.0 Battery Packs, Multi-Voltage Charger; 2781-21 (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger;

All Kits Include: Carrying Case



Specifications:

Weight

RPM 9,000 Switch Paddle Guard Adjustment Tool-Free Overload Protection Yes

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Type 1 Guard, Type 27 Guard, Spanner Wrench, Side Handle, Multi-Voltage Charger, Contractor Bag

5.9 lbs



4-1/2" / 5" Braking **Grinder Kit**

2783-22HD, 2783-22 (2783-20 Tool-Only)

Specifications:

RPM	8,500
Switch Type	Paddle No-Lock
Brake	Yes
Clutch	Yes
Overload Protection	Yes
Tool-Free Accessory Change and Guard	Yes
Length / Weight	15.3" / 8.2 lbs

Includes: 2783-22HD (2) M18[™] REDLITHIUM[™] HD9.0 Battery Packs, Rapid Charger; 2783-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Multi-Voltage Charger

All Kits Include: FIXTEC™ Nut, Flange Nut, T1 Guard, T27 Guard, Carrying Case





M18 FUEL 1/4" Die Grinder Kit

2784-22 (2784-20 Tool-Only)

Specifications:

•	
Collet Size	1/4"
RPM	20,000
Switch Type	Slide, Lock-On
Length / Weight	18.0" / 4.6 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, 11/16" Wrench, 1/2" Wrench, Multi-Voltage Charger, Carrying Case

M18™ Compact Heat Gun Kit

2688-21 (2688-20 Tool-Only)

Specifications:

Temperature	750°F
Guarded Nozzle	Yes
Ladder Hook	Yes
Length / Weight	6.4" / 3.3 lbs

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack, 3/8" Concentrator Nozzle, Hook Nozzle, Multi-Voltage Charger, Carrying Case



M18[™] **18** Gauge **Double Cut Shear Kit** 2635-22 (2635-20 Tool-Only)

Specifications:

Specifications:		
Head	18 Gauge Double Cut	
360° Tool-Free Rotating Head	Yes	
Variable Speed Trigger	Yes	
Length / Weight	17.3" / 5.6 lbs	

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag



M18[™] 14 Gauge Double Cut Shear Kit 2636-22 (2636-20 Tool-Only)

Specifications:

Head	14 Gauge Double Cut
360° Tool-Free Rotating Head	Yes
Variable Speed Trigger	Yes
Length / Weight	17.3" / 6.2 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag



Head	18 Gauge Single Cut
360° Tool-Free Rotating Head	Yes
Variable Speed Trigger	Yes
Length / Weight	18.0" / 5.8 lbs

Includes: (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs, Hex Key, Belt Clip, Multi-Voltage Charger, Contractor Bag





2738-22, 2738-21 (2738-20 Tool-Only)

Specifications:

Capacity	7" Maximum
RPM	0 – 2,200
Variable Speed Dial and Trigger	Yes
Lock-On / Lock-Off	Yes
Length / Weight	19.8" / 6.4 lbs

Includes: 2738-22 (2) M18[™] REDLITHIUM[™] XC5.0 Battery Packs, Backing Pad; **2738-21** (1) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Pack; All Kits Include: Screen Cover, Side Handle,

Bail Handle with (2) Bolts, Rapid Charger



M18[™] 2-Speed **Grease Gun Kit**

2646-22CT, 2646-21CT (2646-20 Tool-Only)

Specifications:

	opoomoutione.	
	Output Pressure	Up to 10,000 PSI (690 BAR)
	Run-Time	Up to 10 Cartridges Per Charge
	Grease Capacity	14 oz Cartridge, 16 oz Bulk, 16 oz Suction
	Air Bleeder Valve	Yes
	Weight	8.5 lbs

Includes: 2646-22CT (2) M18™ REDLITHIUM™ CP1.5 Battery Packs; **2646-22CT** (1) M18™ REDLITHIUM™ CP1.5 Battery Pack; All Kits Include: 48" Flex Hose with Spring Guard, High Pressure

Grease Coupler, Shoulder Strap, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-16-2646 M18[™] Grease Gun 400g Clear Barrel; **49-16-2647** M18[™] Replacement Grease Gun Hose

with High Pressure Coupler; 49-16-2648 M18™ Right Angle Grease Gun Coupler;

49-16-2649 M18[™] High Pressure Grease Coupler (2-Pack)



M18[™] Brushless Threaded Rod Cutter Kit

2872-21 (2872-20 Tool-Only)


Specifications:

Cutting Capacity	1/4", 3/8" and 1/2"
Replacement Cutting Dies	Yes
Dimensions (L x W x H)	10.0" x 5.0" x 6.3"
Weight	7.7 lbs

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Cutting Dies, Allen Key, Multi-Voltage Charger, Carrying Case

Related Accessory:

48-44-2872 1/4", 3/8", 1/2" Replacement Cutting Die Set

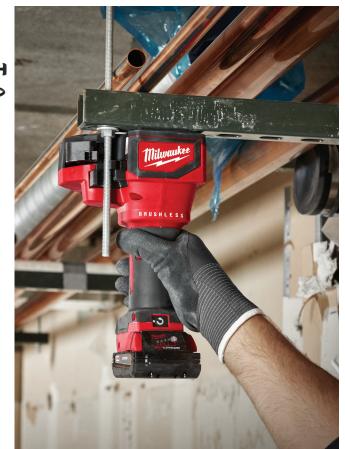






M18™ FORCE LOGIC™ **6T Utility Crimper Kit w/ D3 Grooves and Fixed BG Die**

2678-22BG, 2678-BGD3 (2678-20 Tool-Only)

Specifications:

Output Force	6 Tons
Adaptive Pressure Control System	Yes; PFM™
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Cycle Time	2.9 Seconds
Head Rotation	350°
Height / Length	5.4" / 14.0"
Tool Diagnostics Cycle Time Head Rotation	ONE-KEY™ Compatible 2.9 Seconds 350°

Includes: 2678-22BG (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Carabiner, Multi-Voltage Charger and Inverter, Bucket Bag; All Kits Include: 2678-BGD3 6T Crimping Jaw with Fixed BG Die



M18™ FORCE LOGIC™ **6T Utility Crimper Kit** w/ D3 Grooves and Fixed O Die

2678-22O, 2678-1OD3 (2678-20 Tool-Only)

Specifications:		
Output Force	6 Tons	
Adaptive Pressure Control System	Yes; PFM™	
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible	
Cycle Time	2.9 Seconds	
Head Rotation	350°	
Height / Length	5.4" / 14.0"	

Includes: 2678-220 (2) M18™ REDLITHIUM™ CP2.0 Battery Packs. Carabiner, Multi-Voltage Charger and Inverter, Bucket Bag: All Kits Include: 2678-10D3 6T Crimping Jaw with Fixed O Die

M18™ FORCE LOGIC™ **6T Utility Crimper Kit** w/ D3 Grooves

2678-22, 2678-11D3 (2678-20 Tool-Only)

Specifications:

opecifications.	
Output Force	6 Tons
Adaptive Pressure Control System	Yes; PFM™
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Cycle Time	2.9 Seconds
Head Rotation	350°
Height / Length	5.4" / 14.0"

Includes: 2678-22 (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Carabiner, Multi-Voltage Charger and Inverter, Bucket Bag; All Kits Include: 2678-11D3 6T Snub Nose Crimping Jaw

M18™ FORCE LOGIC™ **6T Utility Crimper Kit** w/ Kearney Grooves

2678-22K (2678-20 Tool-Only)

Engoificatione

Specifications:	
Output Force	6 Tons
Adaptive Pressure Control System	Yes; PFM™
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Cycle Time	2.9 Seconds
Head Rotation	350°
Height / Length	5.4" / 14.0"

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, 6T Kearney Crimping Jaw, Carabiner, Multi-Voltage Charger and Inverter, Bucket Bag

FORCE LOGIC™ 6T Utility Crimper Accessories

Compatible with 2678-22BG, 2678-22O, 2678-22, 2678-22K

6T Utility Crimper Jaws

49-16-BGD3 6T Fixed BG Crimping Jaw; 49-16-10D3 6T Fixed O Crimping Jaw; 49-16-11D3 6T Snub Nose Crimping Jaw; 49-16-KEAR 6T Kearney Crimping Jaw

Cutter Jaws ompatible with 2672-21, 2672-21S, and 2672-21F 49-16-2772 750 MCM Cu/Al Cutting Jaw; **49-16-2773** 477 ACSR Cutting Jaw; 49-16-2777 1/2" EHS Guy Wire Cutting Jaw; 49-16-2778 Fine Stranded Wire Cutting Jaw

Cutter Replacement Blades

48-44-0411 Replacement Copper Blades; 48-44-0412 Replacement Steel Blades: 48-44-2777 1/2" EHS Guy Wire Replacement Blades; 48-44-2778 Fine Stranded Wire Replacement Blades

W Style Dies

49-16-WBG0 W Style Die: "W-BG"; 49-16-WO00 W Style Die: "W-O"; 49-16-WC00 W Style Die: "W-C"; 49-16-W161 W Style Die: "W-161" 49-16-W162 W Style Die: "W-162"; 49-16-W163 W Style Die: "W-163"; 49-16-W164 W Style Die: "W-164" 49-16-W165 W Style Die: "W-165"; 49-16-W166 W Style Die: "W-166": 49-16-W237 W Style Die: "W-237";

49-16-W239 W Style Die: "W-239" 49-16-W243 W Style Die: "W-243"; 49-16-W247 W Style Die: "W-247":

49-16-W249 W Style Die: "W-249" 49-16-W840 W Style Die: "W-K840"

M18™ FORCE LOGIC™ **600 MCM Crimper Kit**

2679-22, 2679-750C, 2679-750A, 2679-350A, 2679-600C

Specifications:

Output Force	6 Tons
Adaptive Pressure Control System	Yes; PFM™
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Cycle Time	2.9 Seconds
Head Rotation	350°
Height / Length	5.4" / 13.3"

Includes: 2679-750C 750 MCM Cu/Al Crimping Jaw All Copper U Style Dies (49-16-KITC Die Kit and 49-16-750C Die Kit); 2679-750A 750 MCM Cu/Al Crimping Jaw, All Aluminum U Style Dies (49-16-KITA Die Kit and 49-16-750A Die Kit); **2679-350A** 49-16-KITA Die Kit; 2679-600C 49-16-KITC Die Kit;

All Kits Include: 2679-22 600 MCM Commercial U Crimping Jaw, (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger, Carrying Case

FORCE LOGIC™ 600 MCM **Crimper Accessories**

Compatible with 2679-22, 2679-750C, 2679-750A, 2679-350A, 2679-600C

Related Accessories:

49-16-U000 600 MCM Crimping Jaw: 49-16-U111 750 MCM Cu/Al Cable Crimping Jaw; 49-16-2780 750 MCM Cu/Al Cable Cutting Jaw

Cutter Replacement Blades

48-44-0411 750 MCM Cu/Al Cable Cutting Blades

Accessory Kits

49-16-KITA #8 AWG - 350 MCM Aluminum U Style Die Kit; 49-16-750A 400 - 750 MCM Aluminum U Style Die & Jaw Kit; 49-16-KITC #8 AWG - 600 MCM Copper U Style Die Kit; 49-16-750C 750 MCM Copper U Style Die & Jaw Kit

Copper U Style Dies

49-16-U001C #1 Copper U Style Die; 49-16-U002C #2 Copper U Style Die; 49-16-U004C #4 Copper U Style Die: 49-16-U006C #6 Copper U Style Die; 49-16-U008C #8 Copper U Style Die; 49-16-U01AC 1/0 Copper U Style Die; 49-16-U02AC 2/0 Copper U Style Die; **49-16-U03AC** 3/0 Copper U Style Die;

49-16-U04AC 4/0 Copper U Style Die; **49-16-U250C** 250 MCM Copper U Style Die;

49-16-U300C 300 MCM Copper U Style Die; **49-16-U350C** 350 MCM Copper U Style Die;

49-16-U400C 400 MCM Copper U Style Die; 49-16-U500C 500 MCM Copper U Style Die; 49-16-U600C 600 MCM Copper U Style Die; **49-16-U750C** 750 MCM Copper U Style Die

Aluminum Dual-Rated U Style Dies

49-16-U001 #1 Aluminum U Style Die; 49-16-U002 #2 Aluminum U Style Die; 49-16-U004 #4 Aluminum U Style Die; 49-16-U006 #6 Aluminum U Style Die; **49-16-U008** #8 Aluminum U Style Die; 49-16-U01A 1/0 Aluminum U Style Die;

49-16-U02A 2/0 Aluminum U Style Die; **49-16-U03A** 3/0 Aluminum U Style Die; 49-16-U04A 4/0 Aluminum U Style Die;

49-16-U250 250 MCM Aluminum U Style Die; 49-16-U300 300 MCM Aluminum U Style Die; 49-16-U350 350 MCM Aluminum U Style Die; 49-16-U400 400 MCM Aluminum U Style Die;

49-16-U500 500 MCM Aluminum U Style Die; 49-16-U600 600 MCM Aluminum U Style Die; **49-16-U750** 750 MCM Aluminum U Style Die



M18™ FORCE LOGIC™ **750 MCM Dieless Crimper Kit**

2877-22

Specifications:

Crimping Capacity	#6 - 750 MCM Cu & Al
Adaptive Distance Control	Yes; Auto Distance Control
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Dimensions (L x W x H)	18.9" x 3.3" x 6.5"
Weight	9.0 lbs

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, Multi-Voltage Charger, Carrying Case



M18™ FORCE LOGIC™ **12T Utility Crimper Kit**


2778-22 (2778-20 Tool-Only)

Specifications:

Output Force	12 Tons
Head Rotation	350°
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Length / Weight	16.0" / 11.9 lbs

Includes: (1) M18[™] REDLITHIUM[™] XC5.0 Battery Pack. (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag



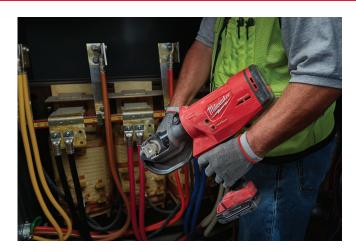

M18™ FORCE LOGIC™ 750 MCM Crimper Kit

2779-22, 2779-750A, 2779-750C

Specifications:

Output Force	12 Tons
Head Rotation	350°
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Length / Weight	16.0" / 11.5 lbs

Includes: 2779-750A 49-12-KITA; 2779-750C 49-12-KITC;
All Kits Include: 2779-22 (1) M18™ REDLITHIUM™ XC5.0 Battery
Pack, (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger,
Carrying Case

Related Accessories:

Accessory Kits

49-12-KITC EXACT™ #6 AWG - 750 MCM Cu 12T U Style Die Kit; 49-12-KITA EXACT™ #6 AWG - 750 MCM AI 12T U Style Die Kit

EXACT™ 12T Copper U Style Dies

EXACT 121 Copper 0 Style bles
49-12-U001C #1 Copper 12T U Style Die;
49-12-U002C #2 Copper 12T U Style Die;
49-12-U004C #4 Copper 12T U Style Die;
49-12-U006C #6 Copper 12T U Style Die;
49-12-U008C #8 Copper 12T U Style Die;
49-12-U01AC 1/0 Copper 12T U Style Die;
49-12-U02AC 2/0 Copper 12T U Style Die;
49-12-U03AC 3/0 Copper 12T U Style Die;
49-12-U04AC 4/0 Copper 12T U Style Die;
49-12-U250C 250 MCM Copper 12T U Style Di
49-12-U300C 300 MCM Copper 12T U Style D
49-12-U350C 350 MCM Copper 12T U Style D

49-12-U400C 400 MCM Copper 12T U Style Die; **49-12-U500C** 500 MCM Copper 12T U Style Die; **49-12-U600C** 600 MCM Copper 12T U Style Die;

49-12-U750C 750 MCM Copper 12T U Style Die
EXACT™ 12T Aluminum U Style Dies
49-12-U001 #1 Aluminum 12T U Style Die;
49-12-U002 #2 Aluminum 12T U Style Die;
49-12-U004 #4 Aluminum 12T U Style Die;
49-12-U006 #6 Aluminum 12T U Style Die;
49-12-U008 #8 Aluminum 12T U Style Die;
49-12-U01A 1/0 Aluminum 12T U Style Die;
49-12-U02A 2/0 Aluminum 12T U Style Die;
49-12-U03A 3/0 Aluminum 12T U Style Die;
49-12-U04A 4/0 Aluminum 12T U Style Die;
49-12-U250 250 MCM Aluminum 12T U Style Die;
49-12-U300 300 MCM Aluminum 12T U Style Die;
49-12-U350 350 MCM Aluminum 12T U Style Die;
49-12-U400 400 MCM Aluminum 12T U Style Die;
49-12-U500 500 MCM Aluminum 12T U Style Die;
49-12-U600 600 MCM Aluminum 12T U Style Die:

49-12-U750 750 MCM Aluminum 12T U Style Die

M18™ FORCE LOGIC™ 15T Crimper Kit

2879-22 (2879-20 Tool-Only)

Specifications:

Crimping Capacity	#8 - 1500 MCM Cu, #8 - 1250 MCM AI
Output Force	15 Tons
Adaptive Pressure Control	Yes; PFM™
Reporting and Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Dimensions (L x W x H)	23.3" x 3.1" x 5.5"
Weight	16.1 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, P-to-U Die Adapter, Carabiner, Multi-Voltage Charger, Contractor Bag

Related Accessory:

49-15-PUAI	P-10-0 Die Adapter;
	15T 750 MCM Al P-Die;
49-15-P800	15T 800 MCM Al P-Die;
49-15-P000	15T 1000 MCM Al P-Die;
49-15-P750	C 15T 750 MCM Cu P-Die;
49-15-P800	C 15T 800 MCM Cu P-Die;
49-15-P000	C 15T 1000 MCM Cu P-Die



M18™ FORCE LOGIC™ 10,000 PSI Hydraulic Pump Kit

2774-21HD (2774-20 Tool-Only)

Specifications:

10,000 psi / 700 bar	
1.4 qts	
125.0 in ³ /min	
25.6 in ³ /min	
IP54	
15.8" x 11.5" x 13.9"	
29.7 lbs	

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Rapid Charger

Related Accessories:

49-12-2776 Bucket Hanger; **49-12-2775** 6' Controller Extension



M18™ FORCE LOGIC™ Cable Cutter Kit w/ 750 MCM Cu Jaws

2672-21

Specifications:

Cut Capacity	750 MCM Cu, 1000 MCM Al
Average Cut Speed	3 Seconds
Head Rotation	350°
Auto Reset	Yes
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	5.4" / 14.0"

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, 750 MCM Cable Cutter Jaw, Allen Wrench, Multi-Voltage Charger, Carrying Case

M18™ FORCE LOGIC™ Cable Cutter Kit w/ 477 ACSR Jaws

2672-21S

Specifications:

Cut Capacity	477 HEN ACSR
Average Cut Speed	3 Seconds
Head Rotation	350°
Auto Reset	Yes
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	5.4" / 14.0"

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, 477 ACSR Cutting Jaw, Carabiner, Allen Wrench, Multi-Voltage Charger and Inverter, Bucket Bag

M18™ FORCE LOGIC™ Cable Cutter Kit w/ Fine Stranded Wire Jaws

2672-21F

Specifications:

Cut Capacity	777.7 MCM Fine Stranded Wire
Average Cut Speed	3 Seconds
Head Rotation	350°
Auto Reset	Yes
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	5.4" / 14.0"

Includes: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Fine Stranded Wire Cutting Jaw, Allen Wrench, Multi-Voltage Charger, Carrying Case

FORCE LOGIC[™] Cable Cutter Accessories

Compatible with 2672-21, 2672-21S and 2672-21F

Cutter Jaws

49-16-2772 750 MCM Cu/Al Cutting Jaw; **49-16-2773** 477 ACSR Cutting Jaw;

49-16-2777 1/2" EHS Guy Wire Cutting Jaw;

49-16-2777 1/2" EHS Guy Wire Cutting Jaw; **49-16-2778** Fine Stranded Wire Cutting Jaw

Cutter Replacement Blades

48-44-0411 Copper Replacement Blades; **48-44-0412** ACSR Replacement Blades;

48-44-0412 ACSR Replacement Blades; **48-44-2777** 1/2" EHS Guy Wire Replacement Blades;

48-44-2778 Fine Stranded Wire Replacement Blades

M18™ FORCE LOGIC™ 3" Underground Cable Cutter Kit w/ Wireless Remote

2776R-21

Specifications:

Cut Capacity	1500 MCM Cu 15kV
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	12.4" / 20.8"
Weight	15.8 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Remote, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag

Related Accessory:

49-16-2774 3" Underground Replacement Blades

M18™ FORCE LOGIC® 3" Underground Cable Cutter Kit

2776-21

Specifications:

Cut Capacity	1500 MCM Cu 15kV
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	12.4" / 20.8"
Weight	15.8 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Carabiner, Multi-Voltage Charger and Inverter, Utility Bag

Related Accessory:

49-16-2774 3" Underground Replacement Blades



M18™ FORCE LOGIC™ 1590 ACSR Cutter Kit

2777-21

Specifications:

Cut Capacity	Up to 1590 Falcon ACSR
Tool Diagnostics	Built-In; ONE-KEY™ Compatible
Height / Length	10.6" / 16.8"
Weight	11.8 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Carabiner, Side Handle, Multi-Voltage Charger and Inverter, Utility Bag

Related Accessory:

49-16-2775 1590 ACSR Replacement Blades



M18™ FORCE LOGIC™ **6 Ton Knockout Tool Kit**

2677-23, 2677-21 (2677-20 No Punches or Dies)

Specifications:

Mild Steel Capacity	4" in 14 Gauge
Stainless Steel Capacity	2" in 14 Gauge
Output Force	6 Tons
Quick-Connect Draw Stud	Yes
Rapid Reset	Yes
Height / Weight	4.5" / 4.3 lbs

Includes: 2677-23 (1) M18™ REDLITHIUM™ CP2.0 Battery Pack EXACT™ 1/2" – 4" Conduit Punches and Dies; **2677-21** (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, EXACT™ 1/2" - 2" Conduit Punches and Dies; **2677-20** (1) M18™ REDLITHIUM™ CP2.0 Battery Pack (No Punches or Dies Included); All Kits Include: (2) Draw Studs, Quick Connect Alignment System, Multi-Voltage Charger, Carrying Case



M18™ FORCE LOGIC™ **10 Ton Knockout Tool Kit**

2676-23, 2676-22 (2676-20 No Punches or Dies)

Specifications:

Mild Steel Capacity	6" in 12 Gauge	
Stainless Steel Capacity	6" in 14 Gauge	
Output Force	10 Tons	
Quick-Connect Draw Stud	Yes	
Rapid Reset	Yes	
Height / Weight	5.5" / 7.1 lbs	

Includes: 2676-23 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, EXACT™ 1/2" - 4" Conduit Punches and Dies; 2676-22 (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, 1/2" – 2" EXACT™ Conduit Punches and Dies; **2676-20** (2) M18[™] REDLITHIUM[™] XC3.0 Battery Packs (No Punches or Dies Included); All Kits Include: (3) Draw Studs, Quick Connect Alignment System, Multi-Voltage Charger, Carrying Case

FORCE LOGIC™ **Knockout Accessories**

Compatible with 2677-20 and 2676-20

EXACT™ Accessory Kits

49-16-2692 1/2" – 1-1/4" Knockout Set;	
49-16-2693 1/2" – 2" Knockout Set;	

49-16-2694 1/2" - 2" Hand Ratchet Knockout Set; 49-16-2695 2-1/2" - 4" Knockout Set

EXACT™ Punches and Dies

49-16-2660*	1/2"	Die;
49-16-2660S	1/2	" Die;
49-16-2661*	1/2"	Punch;

49-16-2661S 1/2" Punch; 49-16-2662 3/4" Die; 49-16-2663 3/4" Punch;

49-16-2664 1" Die; 49-16-2665 1" Punch;

49-16-2666 1-1/4" Die;

49-16-2667 1-1/4" Punch;

49-16-2668 1-1/2" Die; 49-16-2669 1-1/2" Punch;

49-16-2670 2" Die;

49-16-2671 2" Punch;

49-16-2672 2-1/2" Die;

49-16-2673 2-1/2" Punch; 49-16-2674 3" Die:

49-16-2675 3" Punch;

49-16-2676 3-1/2" Die:

49-16-2677 3-1/2" Punch 49-16-2678 4" Die;

49-16-2679 4" Punch; 49-16-2686 5" Die;

49-16-2687 5" Punch;

49-16-2688 6" Die:

49-16-2689 6" Punch

*These items are intended only for Mild Steel.

EXACT™ Sink Punches & Dies

49-16-2705 7/8" Sink Die; 49-16-2706 7/8" Sink Punch;

49-16-2700 1-3/8" Sink Die;

49-16-2701 1-3/8" Sink Punch

RAPID RESET DRAW STUDS

49-16-2703 Rapid Reset 3/4" Draw Stud; 49-16-2704 Rapid Reset 1-1/8" Draw Stud:

49-16-2708 Rapid Reset 1-1/8" Long Draw Stud

Draw Studs

49-16-2621 3/8" Ball Bearing Draw Stud; **49-16-2622** 3/4" Ball Bearing Draw Stud;

49-16-2680 7/16" Draw Stud;

49-16-2681 3/4" Draw Stud;

49-16-2682 1-1/8" Draw Stud; 49-16-2707 1-1/8" Long Draw Stud

Adapters

49-16-2684 3/8" Adapter for EXACT™ 2-1/2" – 4" Dies to 3/4" Draw Studs; **49-16-2685** Adapter for M18™ FORCE LOGIC™ Knockout Tool to other major brands of punches and dies



M18™ Cable Stripper Kit

2935CU-21, 2935AL-21, 2935X-21 (2935-20 Tool-Only)

Specifications:

Yes
Yes
Industry Standard Quick-Change
8.5" x 2.8" x 11.3"
3.8 lbs

Includes: 2935CU-21 1/0 AWG - 750 MCM Cu THHN / XHHW Bushings; 2935AL-21 1/0 AWG - 750 MCM AI THHN / XHHW Bushings; **2935X-21** 1/0 AWG - 500 MCM Cu RHW / RHH / USE Bushings; All Kits Include: (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, Multi-Voltage Charger, Carrying Case

Cable Stripper Accessories

Compatible with 2935-20, 2435-20

Bushing Kits

49-16-BKITC 1/0 AWG - 750 MCM Cu THHN / XHHW Bushing Kit; 49-16-BKITA 1/0 AWG - 750 MCM AI THHN / XHHW Bushing Kit

Bushings - Cu THHN / XHHW

49-16-B01AC 1/0 AWG Cu THHN / XHHW Bushing; 49-16-B02AC 2/0 AWG Cu THHN / XHHW Bushing; 49-16-B03AC 3/0 AWG Cu THHN / XHHW Bushing; 49-16-B04AC 4/0 AWG Cu THHN / XHHW Bushing; 49-16-B250C 250 MCM Cu THHN / XHHW Bushing; 49-16-B300C 300 MCM Cu THHN / XHHW Bushing; 49-16-B350C 350 MCM Cu THHN / XHHW Bushing; **49-16-B400C** 400 MCM Cu THHN / XHHW Bushing; 49-16-B500C 500 MCM Cu THHN / XHHW Bushing; 49-16-B600C 600 MCM Cu THHN / XHHW Bushing;

49-16-B750C 750 MCM Cu THHN / XHHW Bushing

Bushings - AI THHN / XHHW

49-16-B01A 1/0 AWG AI THHN / XHHW Bushing: 49-16-B02A 2/0 AWG AI THHN / XHHW Bushing; 49-16-B03A 3/0 AWG AI THHN / XHHW Bushing: 49-16-B04A 4/0 AWG AI THHN / XHHW Bushing; **49-16-B250** 250 MCM AI THHN / XHHW Bushing; **49-16-B300** 300 MCM AI THHN / XHHW Bushing; 49-16-B350 350 MCM AI THHN / XHHW Bushing; 49-16-B400 400 MCM AI THHN / XHHW Bushing; 49-16-B500 500 MCM AI THHN / XHHW Bushing; 49-16-B600 600 MCM AI THHN / XHHW Bushing; 49-16-B750 750 MCM AI THHN / XHHW Bushing

Bushings - Cu RHW / RHH / USE

49-16-B01AX 1/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B02AX 2/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B03AX 3/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B04AX 4/0 AWG Cu RHW / RHH / USE Bushing; 49-16-B250X 250 MCM Cu RHW / RHH / USE Bushing; 49-16-B300X 300 MCM Cu RHW / RHH / USE Bushing; 49-16-B350X 350 MCM Cu RHW / RHH / USE Bushing: 49-16-B500X 500 MCM Cu RHW / RHH / USE Bushing

Replacement Blade for Bushings 48-44-2935 Replacement Blade for Cable Stripper Bushings

ANGLER™ Pulling **Fish Tape Kit**

2873A-22, 2873B-22 (2873-20 Tool-Only)

Specifications:

Pull Force	250 lbs
Powered Feed & Retract	Yes, AUTO-RUN™ Powered Feed & Retract
Dimensions (L x W x H)	13.2" x 6.0" x 17.7"
Weight	18.7 lbs (2873B), 15.7 lbs (2873A), 6.4 lbs (2873)

Includes: 2873A-22: ANGLER™ 120' Steel Pulling Fish Tape Drum; **2873B-22:** ANGLER™ 240' Steel Pulling Fish Tape Drum; All Kits Include: (2) M18™ REDLITHIUM™

CP2.0 Battery Packs, Multi-Voltage Charger

Related Accessories:

48-44-5176 M18 FUEL™ ANGLERT 120' x 1/8" Steel Pulling Fish Tape Drum; 48-44-5178 M18 FUEL™ ANGLER" 240' x 1/8" Steel Pulling Fish Tape Drum; **48-44-5195** M18 FUEL™ ANGLER™ 100' Non-Conductive Polyester Pulling Fish Tape Drum; **48-44-5197** M18 FUEL™ ANGLER™





M18 FUEL **Pipe Threader** w/ ONE-KEY™ Kit

2874-22HD (2874-20 Tool-Only) Specifications:



Includes: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Threading Support Arm, Rapid Charger, Carrying Case



M18™ FORCE LOGIC™ **Press Tool Kit**

2773-22 (2773-20 No Jaw Kit)

Specifications:

Specifications.		
Capacity	1/2" - 4" (Varies by Material)	
Calibration Interval	50,000 Cycles (LED Indicator)	
Approximate Cycle Time	3.7 Seconds	
Press Force	7,200 lbs	
Length / Weight	14.1" / 6.5 lbs	

Includes: (2) M18[™] REDLITHIUM[™] CP2.0 Battery Packs, (6) Jaws (1/2", 3/4", 1", 1-1/4", 1-1/2", 2"), Multi-Voltage Charger, Carrying Case; 2773-20 No Jaws Included



Long Throw Press Tool Kit

Specifications:

Accessories

CTS Jaws & Rings 49-16-2650 1/2" Jaw; 49-16-2651 3/4" Jaw; 49-16-2652 1-1/4" Jaw; **49-16-2653** 1-1/2" Jaw; 49-16-2654 2" Jaw; 49-16-2655 2-1/2" Ring; 49-16-2656 3" Ring; 49-16-2657 4" Ring: 49-16-2658 Ring Jaw 1 **IPS Jaws & Rings**

49-16-2650B 1/2" Jaw:

49-16-2651B 3/4" Jaw: 49-16-2652B 1" Jaw:

49-16-2653B 1-1/4" Ring;

49-16-2654B 1-1/2" Ring;

49-16-2656B* 2-1/2" IPS XL Ring;

49-16-2657B* 3" IPS XL Ring;

49-16-2658B* 4" IPS XL Ring;

49-16-2654S* 1-1/2" SS Ring;

PEX Jaws & Rings 49-16-2651C 1/2" PEX Crimp (F1807 &F2159) Jaw;

49-16-2653C 3/4" PEX Crimp (F1807 &F2159) Jaw;

49-16-2654C 1" PEX Crimp (F1807 &F2159) Jaw;

49-16-2655C 1-1/4" PEX Crimp (F1807) Jaw;

49-16-2656C 1-1/2" PEX Crimp (F1807) Jaw; 49-16-2657C 2" PEX Crimp (F1807) Jaw *Compatible with 2773-20L only.

49-16-2650S 1/2" SS Jaw;

49-16-2651S 3/4" SS Jaw;

49-16-2652S 1" SS Jaw:

49-16-2655S* 2" SS Ring

49-16-2655B 2" Ring;

Accessory Kits

•	
Capacity	1/2" - 4" (Varies by Material)
Calibration Interval	50,000 Cycles (LED Indicator)
Approximate Cycle Time	4 Seconds, 8 Seconds at Extended Stroke
Press Force	7,200 lbs
Length / Weight	20.1" / 10.1 lbs

Includes: 2773-22L (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, (3) Jaws (1/2", 3/4", 1"), Multi-Voltage Charger, Carrying Case; 2773-20L No Jaws Included

FORCE LOGIC™ Press Tool

Compatible with 2773-20 and 2773-20L

49-16-2696 1/2" – 1" Black Iron Press Kit; **49-16-2690** Press Ring 2-1/2" – 4" Kit; 49-16-2691* SS Press Ring 1-1/2" - 2" Kit; 49-16-2697 1/2" - 2" Black Iron Press Kit; 49-16-2698* 2-1/2" - 4" IPS XL Ring Kit



M18™ Short Throw Press Tool w/ PEX Crimp Jaws Kit

2674-22C, 2674-20C

Specifications:

2674-22P, 2674-20P

Capacity Cycle Time

Auto Cycle

Length / Weight

Specifications:

Capacity	Up to 1"	
Cycle Time	3 Seconds	
Auto Cycle	Yes	
_ength / Weight	13.5" / 4.8 lbs	

M18™ Short Throw Press Tool

w/ Viega® PureFlow® Jaws Kit

Up to 1"

Yes

3 Seconds

13.5" / 4.8 lbs

Includes: 2674-22C (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger; 2674-20C Battery and Charger Sold Separately; All Kits Include: (3) Pex Crimp Jaws (1/2", 3/4", 1"), Carrying Case

M18™ FORCE LOGIC™ 2" - 3" **ProPEX® Expansion Tool Kit**

2633-22HD



Includes: (2) M18[™] REDLITHIUM[™] HIGH OUTPUT[™] XC8.0 Battery Packs, (3) ProPEX® Expansion Heads (2", 2-1/2", 3"), Side Handle, Grease, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-08-2401 150g ProPEX® Expander Cone Grease; 49-16-2614 2" ProPEX® Expansion Head; 49-16-2616 2-1/2" ProPEX® Expansion Head; 49-16-2618 3" ProPEX® Expansion Head



Includes: 2674-22P (2) M18™ REDLITHIUM™ CP2.0 Battery Packs, Multi-Voltage Charger; 2674-20P Battery and Charger Sold Separately; All Kits Include: (3) Viega® PureFlow® Jaws (1/2", 3/4", 1"), Carrying Case



Short Throw Press Tool Accessories

Compatible with 2674-22C and 2674-22P

49-16-2630C 3/8" PEX Crimp Jaw: 49-16-2631C 1/2" PEX Crimp Jaw; 49-16-2632C 5/8" PEX Crimp Jaw; 49-16-2633C 3/4" PEX Crimp Jaw; **49-16-2634C** 1" PEX Crimp Jaw; 49-16-2630P 3/8" Viega® PureFlow® Jaw 49-16-2631P 1/2" Viega® PureFlow® Jaw; 49-16-2632P 5/8" Viega® PureFlow® Jaw; 49-16-2633P 3/4" Viega® PureFlow® Jaw; 49-16-2634P 1" Viega® PureFlow® Jaw



M18™ ProPEX® **Expansion Tool Kit**

2632-22XC (2632-20 Tool-Only)

Specifications:

3/8" - 1-1/2"
Built-In
8.7" x 4.4" x 10.8"
9.2 lbs

Includes: (2) M18™ REDLITHIUM™ XC3.0 Battery Packs, (3) ProPEX® Expansion Heads (1", 1-1/4", 1-1/2"), Grease, Multi-Voltage Charger, Carrying Case

Related Accessories:

49-08-2400 ProPEX® Expander Cone Grease; 49-16-2608 1" ProPEX® Expansion Head; 49-16-2610 1-1/4" ProPEX® Expansion Head; 49-16-2612 1-1/2" ProPEX® Expansion Head





Sewer Sectional Machine Kit w/ CABLE DRIVE"

2871A-22, 2871-22

May Drain Line

Specifications:

Capacity	2" – 8" up to 200"
Cable Capacity	7/8" and 1/1-4"
Powered Cable Feed & Retract	Yes, CABLE DRIVE™
Cable Spin Speed	700 RPM
Height / Length	23" / 35"
Weight	74 lbs

Includes: 2871A-22 (7) 1-1/4" x 15' All Purpose Open Wind Cables, (2) Cable Containers, Straight Auger, Funnel Auger, Small Opening Tool, Medium Opening Tool, 3" Grease Cutter, 3" Root Cutter, 4" Root Cutter, Pin Key, Head Attachment Case;

All Kits Include: (2) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Packs, Rear Guide Hose, Rapid Charger

Related Accessories:

47-53-2871 Cable Container;

47-53-2872 Rear Guide Hose;

48-53-2851 1-1/4" x 15' All Purpose Open Wind Sectional Cable; 48-53-2854 1-1/4" x 15' Heavy Duty Open Wind Sectional Cable;

48-53-2852 7/8" x 15' Open Wind Cable;

48-53-3830 Straight Auger for 7/8" Sectional Cable;

48-53-3831 Funnel Auger for 7/8" Sectional Cable;

48-53-3832 3" Root Cutter for 7/8" Sectional Cable;

48-53-3833 4" Root Cutter for 7/8" Sectional Cable;

48-53-3834 6" Root Cutter for 7/8" Sectional Cable;

48-53-3835 Small Opening Tool for 7/8" Sectional Cable;

48-53-3836 Medium Opening Tool for 7/8" Sectional Cable;

48-53-3837 3" Grease Cutter for 7/8" Sectional Cable; 48-53-3838 4" Grease Cutter for 7/8" Sectional Cable;

48-53-3840 Head Attachment Kit for 7/8" Sectional Cable;

48-53-4830 Straight Auger for 1-1/4" Sectional Cable;

48-53-4831 Funnel Auger for 1-1/4" Sectional Cable;

48-53-4832 3" Root Cutter for 1-1/4" Sectional Cable; 48-53-4833 4" Root Cutter for 1-1/4" Sectional Cable:

48-53-4834 6" Root Cutter for 1-1/4" Sectional Cable;

48-53-4835 Small Opening Tool for 1-1/4" Sectional Cable;

48-53-4836 Medium Opening Tool for 1-1/4" Sectional Cable;


48-53-4837 3" Grease Cutter for 1-1/4"" Sectional Cable;

48-53-4838 4" Grease Cutter for 1-1/4" Sectional Cable;

48-53-4840 Head Attachment Kit for 1-1/4" Sectional Cable:

44-60-0005 Pin Key for Drain Cleaning;

48-53-2839 Head Attachment Case



SWITCH PACK™ Sectional Drum System Kit

2775-211, 2775A-211, 2775B-211, 2775C-222, 2775E-211 Specifications:

Maximum Drain Line Capacity	1-1/4" – 4" up to 100' (not for roots)
Drum Capacity	Inner Core Cables: 5/16" x 75', Best for 1-1/4" – 2-1/2" drain lines; 3/8" x 50', Best for 2" – 3" drain lines; 1/2" x 50', Best for 3" – 4" drain lines
	Open Wind Cables: 5/8" x 50', Best for 1-1/4" – 3" drain lines (soft blockages)
Backpack Straps	Yes
Removable Drum	Yes, Tool-Free
Cable Spin Speed	250 RPM
Electronic Foot Pedal	Yes
Integrated Drum Brake	Yes
Length	15.8"

Includes: 2775A-211: 5/16" x 75' Inner Core Drop Head Cable w/ RUST GUARD™ Plating:

2775B-211: 3/8" x 50' Inner Core Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD™ Plating (1-1/2" Spade Bit, 1-1/2" C-Cutter, Medium Funnel, Medium Drop Head), Pin Key; 2775C-222: Additional M18™ REDLITHIUM™ XC5.0 Battery Pack, Additional

SWITCH PACK™ Drum w/ Anchor Cable, (2) 1/2" x 50' Inner Core Coupling Cables w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD™ Plating (1-1/2" Spade Bit, 1-1/2" C-Cutter, Medium Funnel, Medium Drop Head), Pin Key;


2775E-211: 5/8" x 50' Open Wind Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Head Attachments w/ RUST GUARD™ Plating (1" Spade Bit, C-Cutter, Small Bulb Head, Small Drop Head), Pin Key;

All Kits Include: 2775-211: SWITCH PACK™ Powered Base, SWITCH PACK™ Drum w/ Anchor Cable, (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger

Related Accessory:

47-53-2775 SWITCH PACK™ Drum w/ Anchor Cable



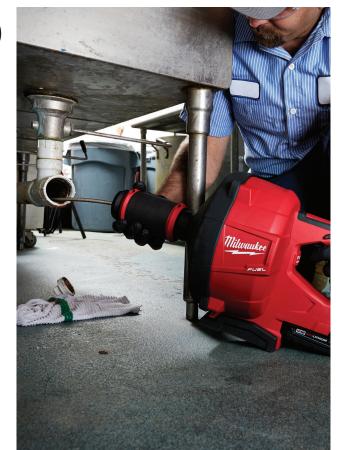

Drain Cleaning Accessories

Compatible with MILWAUKEE® and other professional brand drain cleaning machines

RUST GUARD™ Plated Cables

48-53-2563 1/4" x 25' Inner Core Bulb Head Cable; 48-53-2564 1/4" x 25' Inner Core Drop Head Cable; 48-53-2671 1/4" x 35' Inner Core Bulb Head Cable; 48-53-2672 1/4" x 50' Inner Core Bulb Head Cable; 48-53-2561 5/16" x 25' Inner Core Bulb Head Cable; 48-53-2562 5/16" x 25' Inner Core Drop Head Cable; 48-53-2673 5/16" x 35' Inner Core Bulb Head Cable; 48-53-2674 5/16" x 50' Inner Core Bulb Head Cable; 48-53-2772 5/16" x 75' Inner Core Drop Head Cable; 48-53-2676 3/8" x 25' Inner Core Coupling Cable; 48-53-2675 3/8" x 35' Inner Core Coupling Cable; 48-53-2773 3/8" x 50' Inner Core Coupling Cable; 48-53-2774 1/2" x 50' Inner Core Coupling Cable;

RUST GUARD™ Plated Cable Attachments

Compatible with MILWAUKEE® Coupling Cables

48-53-2775 5/8" x 50' Open Wind Coupling Cable

48-53-2681 Small Bulb Head;

48-53-2682 Small Drop Head; 48-53-2683 1" Spade Bit:

48-53-2684 1" C-Cutter;

48-53-2685 5 Pc Small Cable Head Attachment Kit;

48-53-2786 Funnel Head; 48-53-2787 Medium Drop Head;

48-53-2788 1-1/2" Spade Bit;

48-53-2789 1-1/2" C-Cutter;

48-53-2790 5 Pc Medium Cable Head Attachment Kit

Drain Snake w/ CABLE DRIVE™ Locking Feed System Kit

2772A-21 (2772A-20 Tool-Only), 2772B-21XC

Specifications:

Maximum Drain Line Capacity	1-1/4" – 3" up to 50'
Drum Capacity	1/4" x 50', Best for 1-1/4" - 2" drain lines; 5/16" x 50', Best for 1-1/4" - 2-1/2" drain lines; 3/8" x 35', Best for 2" - 3" drain lines
Powered Cable Feed & Retract	Yes, CABLE DRIVE™
Variable Feed Speed	0 - 8" Per Second
Variable Spin Speed	0 – 600 RPM
Feed Lock	Yes, Twist Lock
Cable Lock	Yes, Twist Lock
LED Light	Yes
Length / Weight	19.5" / 8.2 lbs

Includes: 2772A-21 (1) M18™ REDLITHIUM™ CP2.0 Battery Pack, 5/16" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating; 2772B-21XC (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, 1/4" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating, 3/8" x 35' Inner Core Coupling Cable w/ RUST GUARD™ Plating, (4) Cable Attachments (1" Spade Bit. 1" C-Cutter, Small Bulb Head, Small Drop Head), Pin Kev: 2772A-20 Only Includes 5/16" x 35' Inner Core Bulb Head Cable w/ RUST GUARD™ Plating, Battery and Charger Sold Separately; All Kits Include: Multi-Voltage Charger, Storage Bucket

M18™ Transfer Pump Kit

2771-21 (2771-20 Tool-Only)

Specifications:

Gallons Per Hour	480
Gallons Per Battery (XC3.0)	144
Maximum Lift	18'
Maximum Head Height	75'
Self-Priming	Yes
Flexible Impeller	Yes
Fittings	3/4" Brass Inlet and Outlet
Weight	7.5 lbs

Includes: (1) M18[™] REDLITHIUM[™] XC3.0 Battery Pack, (2) 3/4" Brass Fittings, Multi-Voltage Charger



M18 FUEL 16" Chainsaw Kit

2727-21HD (2727-20 Tool-Only) **Specifications:**



Length / Weight 33.0" / 13.9 lbs

REDLITHIUM HIGH OUTPUT HD120

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, 16" Oregon® Bar and Chain, Scrench, Scabbard, Rapid Charger



M18 ☐ U ☐ U String Trimmer Kit w/ QUIK-LOK™

2825-21ST (2825-20ST Tool-Only)

Length / Weight 73.6" / 12.3 lbs

Specifications:		
Cutting Swath	14" - 16"	
Line Diameter	.080" / .095"	
RPM	0 - 4,900 / 0 - 6,200	
Trigger	Variable Speed	
Feed System	Bump Feed	

Includes: M18 FUEL™ Power Head w/ QUIK-LOK™, M18 FUEL™ QUIK-LOK™ String Trimmer Attachment, (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger





M18 FUEL Pole Saw Kit w/ QUIK-LOK™

Specifications:

2825-21PS

RPM	0 – 4,600
Bar Length	10"
Chain Gauge	.043"
Chain Pitch	3/8" Low Profile
Length / Weight	84.0" / 12.7 lbs

Includes: M18 FUEL™ Power Head w/ QUIK-LOK™, M18 FUEL™ QUIK-LOK™ 10" Pole Saw Attachment, QUIK-LOK™ 3' Attachment Extension, (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Oregon® Bar and Chain, Scrench, Rapid Charger

M18 FUEL QUIK-LOK™ Attachments

Compatible with M18 FUEL™ Power Head

w/ QUIK-LOK™ (2825-20)

49-16-2717 M18 FUEL[™] String Trimmer Attachment;

49-16-2718 M18 FUEL™ Edger Attachment;

49-16-2719 M18 FUEL™ Articulating Hedge Trimmer Attachment;

49-16-2720 M18 FUEL™ 10" Pole Saw Attachment;



M18 FUEL String Trimmer Kit

2725-21HD (2725-20 Tool-Only)

Specifications: Cutting Swath 14" - 16" Line Diameter .080" / .095" RPM 0 - 4,600 / 0 - 5,800 Trigger Variable Speed Feed System Bump Feed Length / Weight 70.8" / 12.3 lbs

Includes: (1) M18[™] REDLITHIUM[™] HD9.0 Battery Pack, Rapid Charger

M18 FUEL Hedge Trimmer Kit

2726-21HD (2726-20 Tool-Only) **Specifications:**

Blade Length	24"
Cut Capacity	3/4"
SPM	3,400
Gear Case	All-Metal
Length / Weight	45.5" / 11.1 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Scabbard, Rapid Charger



M18 FUEL Blower Kit

2724-21HD (2724-20 Tool-Only) Specifications:

Max Air Volume	450 CFM
Max Air Speed	120 MPH
Noise Rating (db)	62 (ANSI B175)
Lock On Button	Yes
Length / Weight	36.9" / 7.3 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger



M18™ SWITCH TANK™ 4-Gallon Backpack Sprayer Kit

2820-21PS (2820-20PS Tool-Only)

Specifications:

•	
Tank Capacity	4-Gallon
Pump Type	Dual Diaphragm Pump
PSI Range	20 - 120 PSI (5 Modes)
Spray Distance	Up to 25'
Flow Rate Range	0.10 - 0.51 Gal/Min
Dry Weight	18.3 lbs

Includes: M18™ SWITCH TANK™ Powered Base, SWITCH TANK™ 4-Gallon Sprayer Tank Assembly, (1) M18™ REDLITHIUM™ XC3.0 Battery Pack, Adjustable Nozzle, Fan Nozzle, Multi-Voltage Charger

Related Accessories:

49-16-28WS SWITCH TANK™ 4-Gallon Water Supply Tank Assembly; 49-16-28CS SWITCH TANK™ 4-Gallon Concrete Sprayer Tank Assembly; 49-16-28PS SWITCH TANK™ 4-Gallon Sprayer Tank Assembly



M18™ ROCKET™ Dual Pack **Tower Light w/ ONE-KEY™ Kit**

2120-22HD (2120-20 Tool-Only)

Specifications:

Lumens	5,400 / 3,100 / 1,600 (Customizable)
Modes	High, Medium, Low
Water & Dust Rating	IP67
Height	22" Collapsed, 5'5" Fully Extended
Weight	8.2 lbs

Includes: (2) M18[™] REDLITHIUM[™] HD9.0 Battery Packs, Shoulder Strap, Rapid Charger



Specifications:

9,000 / 4,800 / 2,500 (Customizable)
High, Medium, Low
IP54
29.5" / 27.1 lbs

Battery and Charger Sold Separately





CHARGES





M18™ RADIUS™ Site Light

2151-20 Tool-Only

Specifications:

Lumens	9,000 / 4,800 / 2,500
Modes	High, Medium, Low
Height / Weight	29.5" / 23.2 lbs

Battery and Charger Sold Separately









M18™ RADIUS™ Compact Site Light w/ ONE-KEY™

2146-20 Tool-Only

Specifications:

Lumens	4,400 / 2,100 / 1,000 (Customizable)
Modes	High, Medium, Low
Water & Dust Rating	IP54
Powered By	M18 [™] or Corded
Hands Free	Self-Centering Metal Hook
Daisy Chain Compatible	Yes
Weight	10.6 lbs

Includes: Security Cable **2147-20** Equipped with NEPA L5-20



Battery and Charger Sold Separately

4,400 / 2,100 / 1,000

Self-Centering Metal Hook

High, Medium, Low

M18[™] or Corded

Yes

10.6 lbs

Twistlock Outlets Also Available

Compact Site Light

M18™ RADIUS™

2145-20 Tool-Only

Modes

Powered By

Hands Free

Specifications:

Water & Dust Rating

Daisy Chain Compatible

Battery and Charger Sold Separately



M18™ ROCKET™ Dual Power **Tower Light**

3,000 / 1,700 / 900

High, Medium, Low

(3) Independent Multi-Directional

41.5" Collapsed, 7' Fully Extended

CHARGES

M18™ or Corded

19.5 lbs

M18™ ROCKET™ Tower

Light/Charger Kit

2135-21HD (2135-20 Tool-Only)

Specifications:

Water & Dust Rating IP54

Includes: (1) M18™ REDLITHIUM™

HD9.0 Battery Pack, Carrying Bag

Lumens Modes

Head Height

Weight

Powered By

2131-20 Tool-Only

Specifications:

Lumens	2,500 / 1,100 / 700
Modes	High, Medium, Low
Height	40" Collapsed, 7' Fully Extended
Weight	15.3 lbs

Battery and Charger Sold Separately



POWERED BY

POWERED BY

Includes: Security Cable



POWERED BY

M18™ RADIUS™ Compact Site Light w/ Flood Mode 2144-20 Tool-Only

Specifications:

Height / Weight

2,200 / 1,100 / 550 Lumens (Area) Lumens (Flood) 1,000 / 500 / 250 High, Medium, Low Modes M18™ or Corded Powered By Self-Centering Metal Hook Hands Free

10.4" / 4.4 lbs

Battery and Charger Sold Separately



M18™ ROVER™ Flood Light

2361-20 Tool-Only

Specifications:

Lumens	1,500 / 780
Modes	High, Low
Water & Dust Rating	IP54
Hands Free	(1) EMT Hanger
Length / Weight	8.8" / 3.1 lbs

Battery and Charger Sold Separately



M18™ ROVER™ **Mounting Flood Light**

2365-20 Tool-Only

Specifications:

Lumens	1,500 / 650 / 300
Modes	High, Medium, Low
Water & Dust Rating	IP54
Rotating Head	Horizontal and Vertical
Hands Free	Integrated Magnet, Spring Loaded Clamp
Length / Weight	6.3" / 3.2 lbs

Battery and Charger Sold Separately



M18™ Stick Light

2352-20 Tool-Only

Specifications:

-p	
Lumens	300 / 150
Modes	High, Low
Water & Dust Rating	IP54
Pivoting Head	45°
Hands Free	2 Stainless Steel Hooks
Length / Weight	11.6" / 1.1 lbs

Battery and Charger Sold Separately



M18[™] Trouble Light w/ USB Charging 2363-20 Tool-Only


Specifications:

Lumens	700 / 350 / 70 / 700
Modes	High, Medium, Low, Strobe
Run-Time	Up to 100 Hours
Beam Pattern	Adjustable Task - Area
Water & Dust Rating	IPX4
Hands Free	2 Stainless Steel Hooks
USB Charger	2.1A USB Charging Port for External Devices
Length / Weight	11.5" / 1.2 lbs

Battery and Charger Sold Separately







Dual Power Flood Light

Battery and Charger Sold Separately

M18™ ROVER™

2360-20 Tool-Only

Specifications:











M18™ Search Light Kit

2354-21 (2354-20 Tool-Only)

Specifications:

Lumens	1,250 / 1,200 / 600 / 1,200
Modes	Spot/Flood, Flood, Spot, Strobe
Beam Distance	730 yd / 668 m
Water & Dust Rating	IP54
Head Rotation	198°
Length / Weight	11.5" / 3.1 lbs

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Shoulder Strap, Multi-Voltage Charger

M18™ Utility Bucket Light Kit

IP56

HD9.0 Battery Packs; **2122-21HD** (1) M18[™] REDLITHIUM[™]

Includes: 2122-22HD (2) M18™ REDLITHIUM™

All Kits Include: Rapid Charger, Storage Bag

13.8" / 8.3 lbs

2,500 / 2,200 / 800

Flood, Spot/Flood, Spot

Patented Spring Loaded **Bucket Clamp**

2122-22HD, 2122-21HD (2122-20 Tool-Only)

Specifications:

Water & Dust Rating

Length / Weight

HD9 0 Battery Pack

71

Lumens Modes

Hands Free



opcomounding:		
	Lumens	100
	Hands Free	Integrated Hook

Battery and Charger Sold Separately











M18™ Compact Blower

0884-20 Tool-Only

Specifications:

Max Air Volume	100 CFM
Max Air Speed	160 MPH
Switch	3-Speed Electronic
Length / Weight	20.5" / 2.6 lbs

Battery and Charger Sold Separately

Includes: Flexible Nozzle, 9" Extension, Universal Inflator/Deflator



3-in-1 Backpack Vacuum Kit

0885-21HD (0885-20 Tool-Only)

Specifications:

Air Flow	55 CFM
Suction (H ₂ O)	76"
Air Watts	159
Filter	HEPA
Canister Volume	1 Gallon
Material	Dry Material Pickup Only
Weight	15.3 lbs

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Telescoping Extension Wand, Flexible Hose, HEPA Filter, Crevice Tool, Dust Extraction Adapter and Floor Tool, Rapid Charger

Related Accessories: 49-90-1963 HEPA Filter; **49-90-1964** 9' Hose Accessory













-	
Air Volume	40 CFM
Inlet Diameter	1-1/4"
Canister Volume	36 oz
Filter	HEPA
Weight	4.3 lbs

Battery and Charger Sold Separately

Includes: 4' Flexible Hose, (2) Extension Tools, Crevice Tool, Floor Tool, Removable HEPA Filter

Related Accessory: 49-90-1951 HEPA Filter (2-F



0880-20 Tool-Only

Specifications:

Material	Wet/Dry	
Capacity	2 Gallon	
Air Volume	45 CFM	
Suction (H ₂ O)	32"	
Filter	HEPA	

Battery and Charger Sold Separately

Includes: HEPA Filter, 6' Flexible Hose, Crevice Tool, Utility Nozzle

Bluetooth® 4.2, AM/FM, AUX Charges all M18™ Batteries

All M18™ Batteries, 120V AC

for External Devices

Weather Sealed

Related Accessory:



0886-20 Tool-Only

Specifications:

Max Air Flow	284 CFMs (18 MPH)
RPM (3 Settings)	1,370 / 1,900 / 2,350
Length / Weight	10.3" / 5.2 lbs

100 ft

USB Charging Port 2.1A USB Charging Port

Battery and Charger Sold Separately

Includes: AC Adapter

M18™ PACKOUT™

Radio + Charger

2950-20 Tool-Only

Battery Charger

Device Storage

Powered By

Bluetooth® Range

Modes

Specifications:

HEPA FILTER

M18™ / M12™ Wireless Jobsite Speaker

2891-20 Tool-Only

Modes

Specifications:

Wiodos	(Cable Not Included)
Bluetooth® Range	100 ft
USB Charging Port	2.1A USB Charging Port for External Devices
Powered By	All M18 [™] and M12 [™] Batteries, AC Adapter

Bluetooth® ALIX

Battery and Charger Sold Separately

Includes: AC Adapter









M18™ Power Source 49-24-2371

Specifications:

2.1A USB Charging Port for External Devices
Up to 18 Hours
All M18 [™] Batteries

Powers all MILWAUKEE® M12™ Heated Gear






Specifications:

Lumens	100
Hands Free	Integrated Hook
Head Rotation	90°















Modes

Includes: 3.2 mm Auxiliary Input Cord, (2) AAA Batteries (For Memory Backup)

2792-20 Tool-Only

Battery Charger

Device Storage

Bluetooth® Range

USB Charging Port

Specifications:


















M18™ Jobsite Radio

M18[™] Jobsite Radio/Charger

100 ft

AM, FM, AUX, Bluetooth®

Charges all M18™ Batteries

2.1A USB Charging Port

Auxiliary Compartment

All M18™ Batteries, 120V AC

for External Devices Weather Sealed

Specifications:

Modes AM, FM, AUX	
USB Charging Port 2.1A USB Charging Po for External Devices	ort
Device Storage Weather Sealed Auxilia Compartment	ary
Powered By All M18™ Batteries, 120	OV AC

Battery and Charger Sold Separately

Includes: 3.2 mm Auxiliary Input Cord, (2) AAA Batteries (For Memory Backup)


























Battery Sold Separately



M18™ REDLITHIUM™ **HIGH OUTPUT™ HD12.0 System Starter Kit**

48-59-1200

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack, Rapid Charger





M18™ REDLITHIUM™ **HIGH OUTPUT™ XC8.0 System Starter Kit**

48-59-1880

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ XC8.0 Battery Pack, Rapid Charger



M18™ REDLITHIUM™ XC5.0 System Starter Kit

48-59-1850

Includes: (1) M18™ REDLITHIUM™ XC5.0 Battery Pack, Multi-Voltage Charger



M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 **System Starter Kit**

48-59-1835

Includes: (1) M18™ REDLITHIUM™ HIGH OUTPUT™ CP3.0 Battery Pack, Multi-Voltage Charger





M18™ & M12™ Super Charger

48-59-1811

Specifications:	
Compatibility	All M18™ and M12™ Batteries
Charge Sequence	Sequential (First In, First Charged)
Charge Speed	Charges up to 4X Faster, Charges All HIGH OUTPUT™ Batteries in One Hour Or Less
On-Board Indicator Light	Yes
Integrated Hang-Holes	Yes

Batteries Sold Separately

Cell Voltage Monitoring Yes

M18™ Six-Pack **Sequential Charger**

48-59-1806

Specifications:		
Compatibility	All M18™ Batteries	
Charge Sequence	Sequential (Counter-Clockwise F	Rotation)
Skip Button	Manually Designate which Battery Charge	es First
Integrated Hang-Holes	Yes	
Cell Voltage Monitoring	Yes	1
Pass-Through Plug	Yes	

Pass-Through Plug

M18™ & M12™ Rapid Charge Station

48-59-1807

Specifications

specifications.		
Compatibility	All M18™ an	nd M12™ Batteries
Charge Sequence	Charges 3 I Simultaneo	
Charge Speed	Charges Inc up to 40% I	dividual Batteries Faster
Capacity	Holds (3) M	18 [™] and (3) M12 [™] Batteries
Integrated Hang-Holes	Yes	
Cell Voltage Monitoring	Yes	
Pass-Through Plug	Yes	HILL
Batteries Sold Separately		Pass-Through Plug

M18™ Dual Bay Simultaneous Rapid Charger

48-59-1802

Specifications:

Compatibility	All M18™ Batteries
Charge Sequence	Simultaneous
Charge Speed	Charges Individual Batteries up to 40% Faster
Integrated Hang-Holes	Yes

Batteries Sold Separately

M18™& M12™ Rapid Charger

48-59-1808

Specifications:

-	
Compatibility	All M18 [™] and M12 [™] Batteries
Charge Sequence	Sequential (First In, First Charged)
Charge Speed	Charges Individual Batteries up to 40% Faster
On-Board Indicator Light	Yes
Integrated Hang-Holes	Yes
Cell Voltage Monitoring	Yes

Batteries Sold Separately

M18™ & M12™ **Multi-Voltage Charger**

48-59-1812

Specifications:

Compatibility	All M18 [™] and M12 [™] Batteries
Charge Sequence	Sequential (First In, First Charged)
Integrated Hang-Holes	Yes
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes

Batteries Sold Separately


M18™ & M12™ Vehicle Charger


48-59-1810

Batteries Sold Separately

Specifications:	
Compatibility	All M18 [™] and M12 [™] Batteries
Charge Sequence	Sequential (First In, First Charged)
On-Board Indicator Light	Yes
Cell Voltage Monitoring	Yes



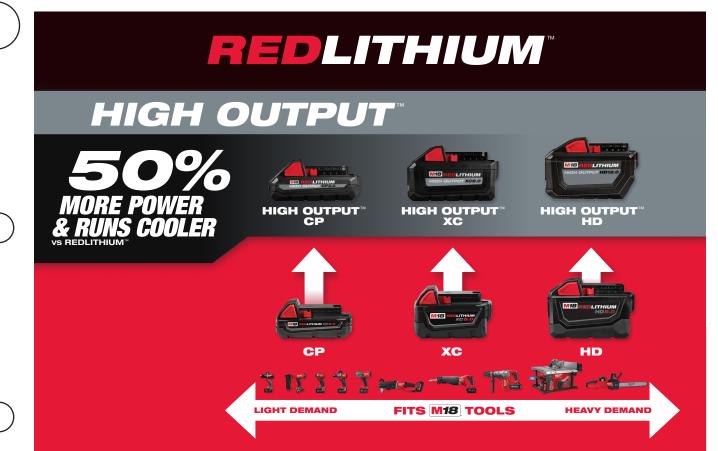



HIGH OUTPUT

48-11-1835 48-11-1837 M18™ REDLITHIUM™ 2-Pack HIGH OUTPUT™ CP3 O



48-11-1815 48-11-1811 M18™ REDLITHIUM CP1.5 Battery Pack



XC all demands

More power and run-time,

great performance for



HIGH OUTPUT



48-11-1865 48-11-1862 HIGH OUTPUT™ XC6.0



48-11-1850 M18[™] REDLITHIUM





48-11-1822

48-11-1852

2-Pack 48-11-1851





48-11-1812 HIGH OUTPUT™ HD12.0

HIGH OUTPUT



M18™ REDLITHIUM™ HD9.0 Battery Pack



MILWAUKEE® is committed to improving productivity by providing performance-driven and trade-focused solutions so users can perform an entire day's work on one battery system. **Plue to the physical size increase of the M18" REDLITHIUM" HIGH OUTPUT" HD12.0, 2160-20, MILWAUKEE® is committed to protecting end user's investments, offering FREE service upgrades for the listed products to any customer that purchases a HIGH OUTPUT" HD12.0 battery pack (starting summer 2018 you will be able to visit eService to request your service upgrade).



							PIEC Kits							3	– 4 Ki		E		LAR Ki		
M18™ COMBO KITS	2996-22	2997-22	2893-22CX	2893-22	2697-22	2697-22CT	2892-22CT	2691-22	2694-22	2695-22	2999-22	2896-22	2897-22CT	2997-23	2694-24	2695-24	2696-24	2997-25	2696-26	2997-27	2695-15R
Kit Tool Tota	1 2	2	2	2	2	2	2	2	2	2	2	2	2	3	4	4	4	5	6	7	15
M18 FUEL™ 1/2" Hammer Drill/Driver w/ ONE-KEY™																					
M18 FUEL™ 1/2" Hammer Drill/Driver																					
M18™ 1/2" Brushless Hammer Drill/Driver																					
M18 [™] 1/2" Compact Brushless Hammer Drill/Driver																					
M18 [™] 1/2" Compact Hammer Drill/Driver																					
M18™ 1/2" Compact Brushless Drill/Driver																					
M18™ 1/2" Compact Drill/Driver																					
M18™ 3/8" Right Angle Drill/Driver																					
M18 FUEL™ Drywall Screw Gun																					
M18 FUEL™ 1/4" Hex Impact Driver w/ ONE-KEY™																					
M18 FUEL™ SURGE™ 1/4" Hex Hydraulic Driver																					
M18 FUEL™ 1/4" Hex Impact Driver																		П			
M18™ 1/4" Hex Brushless Impact Driver																					
M18 [™] Brushless 1/4" Hex 3-Speed Impact Driver				П																	
M18™ 1/4" Hex Impact Driver*																					
M18 [™] 5/8" SDS Plus Rotary Hammer																					
M18 FUEL™ 1/2" Mid-Torque Impact Wrench w/ Friction Ring																					
M18™ 1/2" High Torque Impact Wrench																					
M18™ 1/2" Compact Impact Wrench																					
M18 FUEL™ SAWZALL® Recip Saw														П				П			
M18 [™] SAWZALL [®] Recip Saw															Π						
M18 [™] HACKZALL [®] One-Handed Recip Saw										П											
M18 FUEL™ 6-1/2" Circular Saw																_		П			
M18™ 6-1/2" Circular Saw															П						
M18™ Multi-Tool															_						
M18™ Band Saw																					
M18 [™] Jobsite Radio																					
M18 FUEL™ 4-1/2" / 5" Grinder Paddle Switch, No-Lock																					
M18™ 4-1/2" Cut-Off / Grinder																				_	
M18™ Compact Blower																			_		
M18™ Wet/Dry Vacuum																					
M18™ Work Light															П			П			
Also Includes																					
M18 [™] and M12 [™] Multi-Voltage Charger	1	п	П	П	П	П	П	П	П	П	П	П	п	П	П	П	П	п	П	П	
M18™ Six-Pack Sequential Charger	+																				
M18 [™] REDLITHIUM [™] CP1.5 Battery Pack						2		2													
M18™ REDLITHIUM™ CP2.0 Battery Pack			1			_	2						2								
M18™ REDLITHIUM™ XC3.0 Battery Pack					2					2					2	2	2		2		
M18™ REDLITHIUM™ XC4.0 Battery Pack			1	2																	4
M18™ REDLITHIUM™ XC5.0 Battery Pack	2	2							2		2	2		2				2		2	
Carrying Case																					
Contractor Bag													_							2	_

*M18™ 1/4" Hex Impact Driver is the single, variable speed model
















EQUIPMENT REDEFINED TRADE FOCUSED SYSTEM WIDE





ALL MX FUEL BATTERIES FIT ALL MX FUEL EQUIPMENT

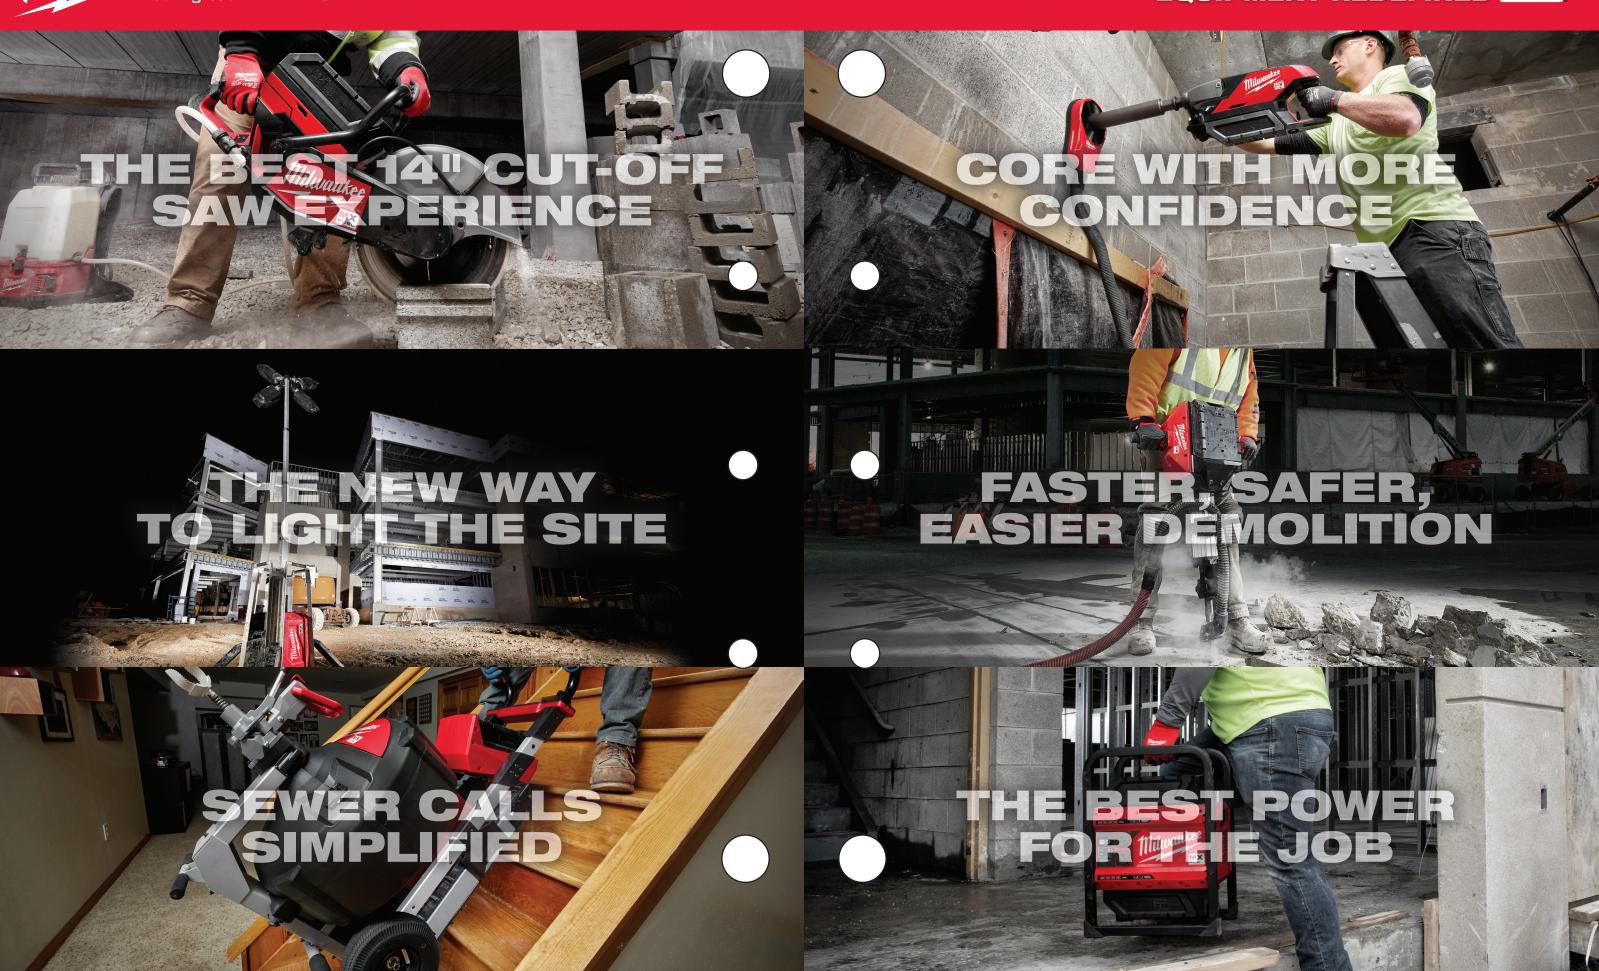



EQUIPMENT REDEFINED.

The MX FUEL™ Equipment System revolutionizes the light equipment market by delivering the performance, run-time and durability demanded by the trades without the hazards associated with emissions, noise, vibration and the frustrations of gas maintenance. This completely compatible system goes beyond the limitations of gasoline and power cord units, utilizing the industry's most advanced batteries, motors and electronics to deliver a best-in-class experience for users. This is Equipment Redefined.

REDLITHIUM[™] **BATTERY PACK**

- Industry Leader in LITHIUM-ION Technology
- Patented Designs Protect Against Drops, Water and Harsh Environments
- Robust Electronics Optimize Performance for **Every Equipment and Battery Combination**



REDLINK PLUS™ INTELLIGENCE

- Most Advanced System of Equipment Electronics in the Industry
- Protects Equipment with Best-In-Class Thermal and Overload Monitoring
- Delivers In-Application Communication, **Optimizing Equipment Performance**







- Engineered Uniquely for the Demands of Each Piece of Equipment
- Optimized for the Perfect Combination of Performance, Portability and Productivity
- Built with Maximum Copper Content and **Top-Grade Rare Earth Magnets**















EQUIPMENT REDEFINED TRADE FOCUSED SYSTEM WIDE





MXF314-1XC Specifications:

specifications.	
Blade Diameter	14"
Cut Depth	5"
Blade Arbor	1" / 20 mm
RPM	5,350
On-Board Water Delivery	Yes
Weight w/ Battery	32.1 lbs
Push Button Activation	Yes
ONE-KEY™ Compatible	Track and Manage
Battery Compatibility	Fits All MX FUEL™ Battery Packs
Warranty	2 Year Equipment, Battery & Charger

Includes: (1) MX FUEL™ REDLITHIUM™ XC406 Battery Pack, MX FUEL™ Charger, Wrench, Hex Key, Quick Connect, Contractor Bag

Available Accessories:

49-94-1475

14" x 1/8" x 1" Cutting Wheel

49-93-7540 14" Diamond Ultra Segmented



Additional Equipment: (Not Included)

3100 MX FUEL™ 14" Cut-Off Saw Cart

2820-21WSM18™ SWITCH TANK™
4-Gallon Backpack
Water Supply Kit



MX FUEL[™] Handheld Core Drill Kit w/ Stand



MXF301-2CXS

Specifications:

-		Pur Pur
Maximum Bit Capacity	6"	A
RPMs Low / High	790 / 1,550	
Spindle Size	1-1/4"-7	
Wet / Dry Coring	Both	
On-Board Water Delivery	Yes	
Stand Included	Yes	
Weight: Machine w/ CP Battery	21.6 lbs	
Weight: Stand Only	29.0 lbs	
Push Button Activation	Yes	
ONE-KEY™ Compatible	Track and Mana	age
Battery Compatibility	Fits All MX FUE	™ Battery Packs
Warranty	2 Year Equipme	ent, Battery & Charger

Includes: (1) MX FUEL™ REDLITHIUM™ XC406 Battery Pack, (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, Compact Core Drill Stand, Trigger Lock, 5/8"-11 Bit Adapter, Quick Connect, Hard Case with Wheels

MX FUEL™ Breaker Kit



Specifications:

MXF368-1XC

Chuck Size 1-1/8" Hex Blows per Minute 1,300 Impact Energy (ft/lbs) 50 Vibration 4.9 m/s² Soft Start Yes Weight w/ Battery 63.9 lbs Push Button Activation ONE-KEY™ Compatible Battery Compatibility Fits All MX FUEL™ Battery Packs Warranty 2 Year Equipment, Battery & Charger	Specifications:	. 100	
Impact Energy (ft/lbs) 50 Vibration 4.9 m/s² Soft Start Yes Weight w/ Battery 63.9 lbs Push Button Activation Yes ONE-KEY™ Compatible Track and Manage Battery Compatibility Fits All MX FUEL™ Battery Packs	Chuck Size	1-1/8" Hex	
Vibration 4.9 m/s² Soft Start Yes Weight w/ Battery 63.9 lbs Push Button Activation Yes ONE-KEY™ Compatible Track and Manage Battery Compatibility Fits All MX FUEL™ Battery Packs	Blows per Minute	7	
Soft Start Yes Weight w/ Battery 63.9 lbs Push Button Activation ONE-KEY™ Compatible Battery Compatibility Fits All MX FUEL™ Battery Packs	Impact Energy (ft/lbs)	50	
Weight w/ Battery 63.9 lbs Push Button Activation Yes ONE-KEY™ Compatible Track and Manage Battery Compatibility Fits All MXFUEL™ Battery Packs	Vibration	4.9 m/s ²	
Push Button Activation Yes ONE-KEY™ Compatible Track and Manage Battery Compatibility Fits All MX FUEL™ Battery Packs	Soft Start	Yes	
ONE-KEY™ Compatible Track and Manage Battery Compatibility Fits All MX FUEL™ Battery Packs	Weight w/ Battery	63.9 lbs	
Battery Compatibility Fits All MX FUEL™ Battery Packs	Push Button Activation	Yes	
	ONE-KEY™ Compatible	Track and Manage	
Warranty 2 Year Equipment, Battery & Charger	Battery Compatibility	Fits All MX FUEL™ Battery Packs	
	Warranty	2 Year Equipment, Battery & Charger	

Includes: (1) MX FUEL™ REDLITHIUM™ XC406 Battery Pack, MX FUEL™ Charger, Cart, (3) Chisels

Available Accessories:

8960-20 Dust Extractor

5321-DE

Attachment

Dust Extraction




48-62-4001 1-1/8" Hex 16" Moil Point

48-62-4006 1-1/8" Hex 16" Narrow Chisel



MX FUEL[™] Handheld Core Drill Kit

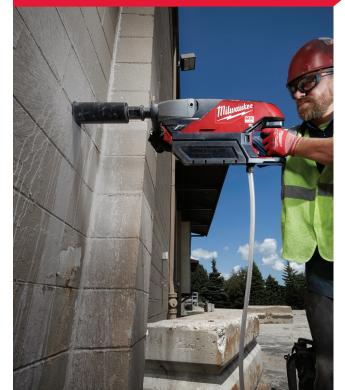

MXF301-1CP **Specifications:**



Includes: (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, Trigger Lock, 5/8"-11 Bit Adapter, Quick Connect, Hard Case with Wheels

Available Accessories for MXF301-1CP & MXF301-2CXS: (Not Included)

2820-21WS M18™ SWITC

M18™ SWITCH TANK™ 4-Gallon Backpack Water Supply Kit



5319-DEDry Coring
Dust Extractor Attachment



48-17-5030 3" Diamond Ultra Wet Core Bit

Fastest Drilling, Maximum Run-Time

9

48-17-0130 3" Diamond Ultra Dry Core Bit

Fastest Drilling Maximum Run-Time

MX FUEL™ CARRY-ON™ 3,600W / 1,800W **Power Supply Kit**



Specifications: Peak Watts 3,600W Running Watts 1,800W (2) 120V Outlets 15A Outlets Inverter Output Pure Sine Wave Integrated Charger Yes Push Button Activation Yes

Track and Manage

Fits All MX FUEL™ Battery Packs

2 Year Equipment and Battery

MX FUEL™ Sewer Drum Machine w/ POWERTREDZ™ Kit



MXF501-1CP **Specifications:**

ONE-KEY™ Compatible

Battery Compatibility

Warranty

Drain Line Capacity	3" – 8" up to 200'
Drum Capacity	100'
Cable Capacity	5/8" and 3/4"
Powered Cable Feed & Retract	Yes, CABLE DRIVE™
Cable Spin Speed	200 RPM
Height / Length	47" / 32"
Weight w/ Battery	125 lbs
Lift Assist	Yes, POWERTREDZ™
Push Button Activation	Yes
ONE-KEY™ Compatible	Track and Manage
Battery Compatibility	Fits All MX FUEL™ Battery Packs
Warranty	2 Year Equipment, Battery & Charger

Includes: (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, 3/4" Anchor Cable

MX FUEL™ Sewer Drum Machine Accessories

Compatible with MXF501-1CP, MXF500-1CP

Machine Accessories 47-53-5001 6-1/2" Guide Hose; 47-53-5002 Load Wheel

5/8" Inner Core Cables **48-53-2325** - 25' **48-53-2350** - 50¹ 48-53-2310 - 100°

3/4" Inner Core Cables 48-53-2425 - 25'; **48-53-2450** - 50'

48-53-2410 – 100' **Leader Cables &** Anchor Cable
48-53-2802 Leader Cable:

48-53-2902 Leader Cable;

48-53-2905 Anchor Cable

48-53-2835 Small Opening Tool; 48-53-2836 Medium Opening Tool; **48-53-2838** 4" Grease Cutters; **48-53-2829** Pin Key;

48-53-2840 9 pc Cable Head

Attachments 48-53-2830 Straight Auger; 48-53-2831 Funnel Auger;

Cable Head

48-53-2832 3" Root Cutters; 48-53-2833 4" Root Cutters; 48-53-2834 6" Root Cutters; 48-53-2837 3" Grease Cutters; **Also Available:**

MX FUEL™ Sewer Drum Machine Kit

Specifications:	
Drain Line Capacity	3" - 8" up to 200'
Drum Capacity	100'
Cable Capacity	5/8" and 3/4"
Powered Cable Feed & Retract	Yes, CABLE DRIVE™
Cable Spin Speed	200 RPM
Height / Length	47" / 32"
Weight w/ Battery	110 lbs
Lift Assist	No
Push Button Activation	Yes
ONE-KEY™ Compatible	Track and Manage
Battery Compatibility	Fits All MX FUEL™ Battery Packs
Warranty	2 Year Equipment, Battery & Charger

Includes: (1) MX FUEL™ REDLITHIUM™ CP203 Battery Pack, MX FUEL™ Charger, 3/4" Anchor Cable

MX FUEL™ ROCKET™ Tower Light/Charger Kit



MXF041-1XC

Specifications: Max Lumens

Modes	High / Med / Low
Collapsed Height	44"
Extended Height	10'
Width	20.8"
Depth	24.8"
Weight w/ Battery	110 lbs
Ingress Rating	Outdoor Use
Push Button Activation	Yes
ONE-KEY™ Compatible	Customize. Track. Manage.
Battery Compatibility	Fits All MX FUEL™ Battery Packs
Warranty	2 Year Equipment and Battery

27,000


Includes: (1) MX FUEL™ REDLITHIUM™

MX FUEL™ Batteries and Charger



MX FUEL™ Charger

Specifications:



MX FUEL™ REDLITHIUM **XC406 Battery**

MXFXC406

Specifications:

Compatibility	Fits All MX FUEL™ Equipment
Charge Duration	90 min
Capacity	6.0 Ah
Fuel Gauge	Yes
REDLINK™ Intelligence	Yes
ONE-KEY™ Compatible	Yes
Warranty	2 Year

MX FUEL™ REDLITHIUM **CP203 Battery**

MXFCP203



Fits All MX FUEL™ Equipment
45 min
3.0 Ah
Yes
Yes
No
2 Year

PORTABLE POWER TOOL

LIMITED WARRANTY

Every MILWAUKEE **power tool*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on an electric power tool which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of five (5) years** after the date of purchase unless otherwise noted. Return of the power tool to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: Many power tools need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when normal use has exhausted the life of a part including, but not limited to, chucks, brushes, cords, saw shoes, blade clamps, o-rings, seals, bumpers, driver blades, pistons, strikers, lifters, and bumper cover washers.

*This warranty does not cover Air Nailers & Staplers; Airless Paint Sprayer; Cordless Battery Packs; Gasoline Driven Portable Power Generators; Hand Tools; Hoist – Electric, Lever & Hand Chain; M12™ Heated Gear; Reconditioned Product; and Test & Measurement Products. There are separate and distinct warranties available for these products.

**The warranty period for Job Site Radios, M12™ Power Port, M18™ Power Source, Jobsite Fan and Trade Titan™ Industrial Work Carts is one (1) year from the date of purchase. The warranty period for the Drain Cleaning Cables and AIRSNAKE™ Drain Cleaning Air Gun Accessories is two (2) years from the date of purchase. The warranty period for the M18™ Compact Heat Gun, 8 Gallon Dust Extractor, M18™ Framing Nailers, M18 FUEL™ 1/2" Ext. Anvil Controlled Torque Impact Wrench w/ ONE-KEY™, and the M18 FUEL™ 1" High Torque Impact Wrench w/ ONE-KEY™ is three (3) years from the date of purchase. The warranty period for the LED in the LED Work Light and the LED Upgrade Bulb for the Work Light is the lifetime of the product subject to the limitations above. If during normal use the LED or LED Bulb fails, the part will be replaced free of charge.

Warranty Registration is not necessary to obtain the applicable warranty on a MILWAUKEE power tool product. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT, IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES. WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW. SUCH IMPLIED WARRANTIES ARE LIMITED. TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE, SOME STATES DO NOT ALLOW LIMITATIONS. ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and nonwarranty service on a Milwaukee electric power tool.

CORDLESS BATTERY PACK

LIMITED WARRANTY

Every MILWAUKEE Battery Pack (sold with cordless product and/or as a replacement battery pack) is warranted to the original purchaser only to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace a battery pack which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for the stated warranty period from date of purchase. Return of the battery pack to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800. SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Battery Pack Cat. No.	Chemistry	Warranty Period (from date of purchase)	
48-11-1812 48-11-1828 (Serial number prefix "B41E" and later) 48-11-1840 48-11-1850 48-11-1860 48-11-1865 48-11-1880 48-11-1890 48-11-2402 48-11-2440 48-11-2440 48-11-2450 (Serial number prefix "C71")	LITHIUM-ION	Three (3) Years	
48-11-0490 48-11-1815 48-11-1820 48-11-1835 48-11-2001 48-11-2401 48-11-2420 48-11-2430	LITHIUM-ION	Two (2) Years	
48-11-1828 (Serial number prefix "B41D" and earlier) 48-11-1830 (Serial number prefix "A95") 48-11-2830 (Serial number prefix "A71")	LITHIUM-ION	Two (2) Years – plus, Three (3) Years Pro-Rata (prorated)*	
48-11-0100 48-11-1024 48-11-1830 (Serial number prefix "E95") 48-11-1970 48-11-2230	Nickel-Cadmium (Ni-Cd), Nickel-Metal- Hydride (Ni-MH), LITHIUM-ION	One (1) Year	

*The warranty period for MILWAUKEE M18™ 48-11-1828 (with the serial number prefix "B41D" and earlier), V18™ 48-11-1830 (with the serial number prefix "A95"), and V28™ 48-11-2830 (with the serial number prefix "A71") is five (5) years / 2000 charges from the date of purchase, whichever first occurs. The first 1000 charges or 2 years of the warranty, whichever first occurs, are covered through free replacement of the defective battery. This means that for the earlier of the first 1000 charges or two (2) years from the date of purchase/first charge, a replacement battery will be provided to the customer for any defective battery free of charge. Thereafter, the remaining charges up to a total of 2000 or the remainder of the five (5) year period from the date of purchase, whichever first occurs, will be covered on a pro rata basis. This means that every customer gets an additional 1000 charges or three (3) years of pro rata warranty on the

these battery packs, depending upon the amount of use. MILWAUKEE M18[™] 48-11-1828 (with the serial number prefix "B41E" and later), V18[™] 48-11-1830 (with the serial number prefix "E95"), and M28[™] 48-11-2830 (with the serial number prefix "C71") have different warranty periods, as listed.

Warranty Registration is not necessary to obtain the applicable warranty on a MILWAUKEE battery pack. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and non-warranty service on a MILWAUKEE Battery Pack.

HEATED GEAR

LIMITED WARRANTY

Every **MILWAUKEE HEATED GEAR** product (including its battery holder/controller) is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on a Heated Gear product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of one (1) year* after the date of purchase. Return of a Heated Gear product to a MILWAUKEE **factory** Service Center location, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE personnel, misuse, alterations, abuse, normal wear and tear, or accidents.

*This warranty does not cover a M12™ LITHIUM-ION Battery Pack, a M12™ Charger, or a REDLITHIUM™ USB battery; **there are separate and distinct warranties** available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT

APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE; TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location

OUTDOOR POWER EQUIPMENT

LIMITED WARRANTY

Every MILWAUKEE **Outdoor Power Equipment Product*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on an outdoor power equipment product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of three (3) years after the date of purchase unless otherwise noted. Return of the outdoor power equipment to a MILWAUKEE factory Service Center location or participating MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: Many outdoor power equipment products need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when normal use has exhausted the life of a part including, but not limited to trimmer head, trimmer head spool, cutting lines, blades, chains, blower tubes, brushes, o-rings, and seals.

*This warranty does not cover Cordless Battery Packs or Reconditioned Product. There are separate and distinct warranties available for these products.

**The warranty period for SWITCH TANK™ tank assemblies, hoses, handles, and wands are one (1) year from the date of purchase.

MILWAUKEE does not cover freight or labor charges associated with the inspection and testing of outdoor power equipment products which are found by MILWAUKEE not to be a valid warranty claim. A valid warranty claim must be substantiated by the discovery of defective material or workmanship by MILWAUKEE.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO. ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES. SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW. MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION. OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED

WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the **'Service Center Search'** in the **Parts & Service** section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and nonwarranty service on a Milwaukee **electric power tool.**

REDLITHIUM USB LIMITED WARRANTY

Every MILWAUKEE **REDLITHIUM USB battery and charger*** is warranted to the **original purchaser only** to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace repair a REDLITHIUM USB battery or charger which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of **two (2) years** after the date of purchase unless otherwise noted. Return of the REDLITHIUM USB battery or charger to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800.SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents.

Normal Wear: This warranty does not cover repair or replacement when normal use has exhausted the life of a part including, but not limited to charging cables, and wall plugs.

*This warranty does not cover any cordless product sold with the REDLITHIUM USB battery and/or charger. There are separate and distinct warranties available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location.

PERSONAL LIGHTING LIMITED LIFETIME WARRANTY

Every MILWAUKEE **Personal Lighting Product*** (see exceptions below) is warranted to the **original purchaser only** to be free from defects in material

and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace any part on a personal lighting product which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for the lifetime of the personal lighting product. Return of the personal lighting product to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, accidents, or caused by alkaline batteries.

Normal Wear: This warranty does not cover repair or replacement when normal use has exhausted the life of a part including, but not limited to clips, straps, charging cables, wall plugs, and rubber gaskets. This warranty does cover the **LED** in the personal lighting products, subject to the limitations herein.

*This warranty does not cover Cordless Battery Packs or Chargers. There are separate and distinct warranties available for these products.

Warranty Registration is not necessary to obtain the applicable warranty on MILWAUKEE Heated Gear products. The manufacturing date of the product will be used to determine the warranty period if no proof of purchase is provided at the time warranty service is requested.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION, YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS. ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES. WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE: TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU, THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the **'Service Center Search'** in the **Parts & Service** section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest MILWAUKEE *factory* Service Center location

MX FUEL™ PRODUCT, BATTERY PACKS, AND CHARGERS LIMITED WARRANTY

Every MILWAUKEE MX FUEL™ Product, battery pack, and charger is warranted to the original purchaser only to be free from defects in material and workmanship. Subject to certain exceptions, MILWAUKEE will repair or replace a MX FUEL™ product, battery pack, or charger which, after examination, is determined by MILWAUKEE to be defective in material or workmanship for a period of two (2) years after the date of purchase. Return of the MX FUEL™ product, battery pack, or charger to a MILWAUKEE factory Service Center location or MILWAUKEE Authorized Service Station, freight prepaid and insured, is required. For the proper shipping procedure of battery packs, contact 1.800. SAWDUST (1.800.729.3878), or go to www.milwaukeetool.com. A copy of the proof of purchase should be included with the return product. This warranty does not apply to damage that MILWAUKEE determines to be from repairs made or attempted by anyone other than MILWAUKEE authorized personnel, misuse, alterations, abuse, normal wear and tear, lack of maintenance, or accidents

Normal Wear: Many MX FUEL™ products need periodic parts replacement and service to achieve best performance. This warranty does not cover repair when

normal use has exhausted the life of a part including, but not limited to, assist & drive belts, pulleys, blade flanges, vacuum gaskets, tool free handles, set pins, skis, drive couplers, rubber boots, auto feed, stabilize blocks, wheels, carrier wheels, cords, o-rings, seals, bumpers, driver blades, pistons, strikers, lifters, tool holder, and bumper cover washers.

Warranty Registration is not necessary to obtain the applicable warranty on a MX FUEL™ product, battery pack, or charger.

ACCEPTANCE OF THE EXCLUSIVE REPAIR AND REPLACEMENT REMEDIES DESCRIBED HEREIN IS A CONDITION OF THE CONTRACT FOR THE PURCHASE OF EVERY MILWAUKEE PRODUCT. IF YOU DO NOT AGREE TO THIS CONDITION. YOU SHOULD NOT PURCHASE THE PRODUCT. IN NO EVENT SHALL MILWAUKEE BE LIABLE FOR ANY INCIDENTAL, SPECIAL, CONSEQUENTIAL OR PUNITIVE DAMAGES, OR FOR ANY COSTS, ATTORNEY FEES, EXPENSES, LOSSES OR DELAYS ALLEGED TO BE AS A CONSEQUENCE OF ANY DAMAGE TO, FAILURE OF, OR DEFECT IN ANY PRODUCT INCLUDING, BUT NOT LIMITED TO, ANY CLAIMS FOR LOSS OF PROFITS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER EXPRESS WARRANTIES, WRITTEN OR ORAL. TO THE EXTENT PERMITTED BY LAW, MILWAUKEE DISCLAIMS ANY IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR PURPOSE; TO THE EXTENT SUCH DISCLAIMER IS NOT PERMITTED BY LAW, SUCH IMPLIED WARRANTIES ARE LIMITED TO THE DURATION OF THE APPLICABLE EXPRESS WARRANTY AS DESCRIBED ABOVE. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS. SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

This warranty applies to product sold in the U.S.A. and Canada only.

Please consult the 'Service Center Search' in the Parts & Service section of MILWAUKEE's website www.milwaukeetool.com or call 1.800.SAWDUST (1.800.729.3878) to locate your nearest service facility for warranty and non-warranty service on a MX FUEL™ product, battery pack or charger.

.22

.22

92



LIGHTNING MAX REPAIR

MILWAUKEE® understands the unpredictability of the jobsite and the need for fast, reliable repairs and replacements. Through our Lightning Max Repair Program we are committed to providing you the best service so you can minimize downtime and get the job done.

SPEED: Repair of your tool in 7 – 10 days

PAY LESS, NOT MORE: Guaranteed to never pay more than the quoted Lightning Max Repair price

RELIABILITY: All repairs are serviced by experienced, certified factory technicians

QUALITY: Only genuine MILWAUKEE® parts used

WHERE TO GO FOR LIGHTNING MAX REPAIRS

eSERVICE

Solution for quick, convenient repairs, best for smaller tool quantities.

- Fedex shipping to MILWAUKEE® repair facility
- Your tool returned directly to you no need to pick it up
- Go to www.milwaukeetool.com/eService

FACTORY SERVICE CENTERS

Factory Service Centers also carry the widest variety of MILWAUKEE® Tools and Accessories for all your needs. 1-800-SAWDUST (1-800-729-3878)

Anaheim

1130 N Magnolia Anaheim, CA 92801

Atlanta

6155 Jimmy Carter Blvd Suite F2 Norcross, GA 30071

Boston

375 University Avenue Westwood, MA 02090

Chicago

6310 Gross Point Road Niles, IL 60714

Cleveland

8200 Sweet Valley Drive Valley View, OH 44125

Dallas

1625 W Mockingbird Ln Unit 205 Dallas, TX 75235

Denver

2500 W 8th Avenue, Unit E Denver, CO 80204

Houston

3566 West T.C. Jester Blvd Houston, TX 77018

Las Vegas

5580 S Decatur Blvd Unit 110 Las Vegas, NV 89118

Miami

3311 NW 82nd Avenue Miami, FL 33122

Minneapolis/St. Paul

9705 Valley View Road Eden Prairie, MN 55344

Milwaukee

13145 W Lisbon Road Brookfield, WI 53005

New York City

3068 Whitestone Expressway Flushing, NY 11354

Philadelphia

711 West Chester Pike Havertown, PA 19064

San Antonio

14329 San Pedro Avenue, Suite D San Antonio, TX 78232

San Diego

7849 -7851 Clairemont Mesa Blvd. San Diego, CA 92111

San Francisco/Oakland

2341 Lincoln Avenue Hayward, CA 94545

Seattle

5963 Corson Avenue South Suite 104 Seattle, WA 98108

Washington D.C.

11900 Baltimore Ave Suite B Beltsville, MD 20705

CANADA

1-800-268-4015

Edmonton

14506 - 115th Avenue NW Edmonton AB T5M 3B9

Halifax

Unit 102 50 Akerley Blvd Dartmouth NS B3B 1R8

Saskatoon

Unit 630 3530 Millar Ave Saskatoon SK S7P 0B3

Vancouver

9000 Bill Fox Way, Unit 103A Burnaby BC V5J 5J3

Vaughan

140 Fernstaff Court, Unit 4 Vaughan ON L4K 3L8

Winnipeg

675 Berry St, Unit H Winnipeg MB R3H 1A7

M12™ System	9 – 32
M18™ System MX FUEL™ Equipment System	33 – 76 77 – 86
DRILLING & DRIVING	
M12™ Hammer Drill/Drivers M12™ Drill/Drivers	
M12™ Right Angle Drill	
M12™ Screwdrivers	13
M18 [™] Hammer Drill/Drivers	37
M18™ Drill/Drivers	
M18 [™] Right Angle Drill M18 [™] HOLE HAWG [®] / SUPER HAWG [™] Right Angle Drills	38 30
M18 [™] Magnetic Drills	
M18™ Drywall Screw Gun	42
MX FUELT Handheld Core Drill w/ Stand	
MX FUEL™ Handheld Core Drill	84
CONCRETE M12™ Rotary Hammers	15
M12 [™] HAMMERVAC [™] Universal Dust Extractor	16
M18 [™] Rotary Hammers	40
M18™ HAMMERVAC™ Dust Extractors	40
M18™ SWITCH TANK™ Concrete Sprayer MX FUEL™ Breaker	83
IMPACTS & FASTENING	
M12™ Impact Drivers	13, 14
M12™ Right Angle Impact Driver	14
M12 [™] Impact Wrenches	
M18™ Impact Drivers	
M18™ Right Angle Impact Driver	42
M18 [™] Right Angle Impact Wrench	42
M18™ Impact Wrenches	42 – 45
SAWING & CUTTING M12™ Circular Saw	17
M12™ HACKZALL® Recip Saws	
M12 [™] Jig Saw	17
M12™ Multi-Tool	
M12 [™] Rotary Tool	18
M18™ Circular Saws	
M18™ Planer	47
M18™ Jig Saws	
M18™ Multi-Tool	
M18 [™] Table Saw	
M18™ Miter Saws	49
M18™ Nailers	50, 51
$M18^{m}$ 9" Cut-Off Saw	
METAL WORKING	00
M12™ Band Saw	17
M18™ Band Saws	52
M18™ Metal Cutting Circular Saw	
M18 [™] Cut-Off / Grinders M18 [™] Shears	
APPLICATORS	
M12™ Caulk Guns / Accessories	18
M12 [™] Grease Gun	18
M18™ Caulk Guns / Accessories	48
	hh

PLUMBING	&	ELE	CTR	ICAL
M12 [™] Plastic Pipe Sheer				

M12[™] Copper Tubing Cutter

M12[™] 600 MCM Cable Cutter.....

M12 ^{III} Drain Snake	19
M12™ TRAPSNAKE™ Augers	19
M12™ AIRSNAKE™ Drain Cleaning Air Gun	
M12™ ProPEX® Expansion Tool	20
M12 [™] FORCE LOGIC [™] Press Tool	20
M12 [™] No-Hub Driver	20
M18 [™] FORCE LOGIC [™] Crimpers / Accessories	57 – 59
M18 [™] FORCE LOGIC [™] Cable Cutters / Accessories	
M18™ FORCE LOGIC™ Knockout Tools	61
M18 [™] Press Tools	
M18™ ProPEX® Expansion Tools	
M18 [™] Sewer Sectional Machine w/ CABLE DRIVE [™]	
M18™ Drain Snake	66
M18 [™] Transfer Pump	66
MX FUEL™ Sewer Drum Machine w/ POWERTREDZ™	85
MX FUEL™ Sewer Drum Machine	
TEST & MEASUREMENT	
M12 [™] M-SPECTOR FLEX [™] / Accessories	21
M12 [™] M-SPECTOR 360 [™] / Accessories	

M12™ TEMP-GUN™ ... **SPECIALTY PRODUCTS**

M12[™] Infrared Camera.

M12™ Rivet Tool

M18™ Fan...

M18[™] Radios / Speakers

M12 Palm Nailer		
M12™ Stapler		.16
M12 [™] Spot Polisher		.17
M12 [™] Soldering Iron		.18
M12™ Lights		.23
M12™ Heated Gear / Accessories	24 –	26
M12 [™] Radios / Speakers		.26
M12™ Inflator		.27
M12™ Vacuum		.27
Personal Lighting	29,	30
M18 [™] Mud Mixer		.38
M18 [™] Sander		47
M18™ Heat Gun		.55
M18™ Polisher		
M18™ Lights	69 –	71
M18 [™] Compact Blower		.71
M18™ Vacuums		

OUTDOOR POWER EQUIPMENT

MX FUEL™ CARRY-ON™ 3,600W / 1,800W Power Supply

MX FUEL™ ROCKET™ Tower Light/Charger...

M18 [™] Chainsaw	6
M18 [™] String Trimmer	
M18 [™] Hedge Trimmer	
M18™ Blower	

BATTERIES & CHARGERS M12™ Chargers

114	Ulial qui o	_
112™	Batteries	2
	Chargers	
/118 [™]	Batteries	7
	IFI™ REDI ITHIUM™ Batteries and Charger	

COMBO KITS

M12 [™] Combo Kits	31
M18 [™] Combo Kits	75

91